


# Product catalog

Catalog of uPVC profiles  
and additional parts.

**Premium uPVC profiles**



# PREMIUM UPVC PROFILES



**Baufens®**  
Fenster & Türen

OUR **VISION** IS YOUR **HAPPINESS**

## Index



### About Us

Page: 04



### Info

Page: 05



### Certificates

Page: 06



### Export map


Page: 07



### Color chart


Page: 08

## Products




### 8500 Supremo

Page: 09-17




### 8500 Platinum

Page: 18-26




### 8500 Silver

Page: 27-34




### 8500 NL

Page: 35-44




### 85 MD ALUCLIP

Page: 45-48




### 7600 Forest

Page: 49-58




### 7000 series

Page: 59-67




### 6000 series

Page: 68-77



### Unique slide

Page: 78-90




### Atmoslide

Page: 91-101



### Gaskets

Page: 102-103



### Roller shutter Boxes

Page: 104-106



### PVC window sills

Page: 107-109

# Pioneers in uPVC Profile Manufacturing



Founded in Srebrenik, Yavuz d.o.o. is proud to be the first company in Bosnia and Herzegovina to produce uPVC profiles, setting a benchmark in quality, innovation, and industrial progress. Since our establishment, we have remained devoted to becoming a regional leader in the manufacture of high-performance PVC joinery, delivering reliable, energy-efficient solutions that exceed industry expectations.

Our success is rooted in a strong vision and a commitment to continuous advancement. We thrive by:

- ✓ Expanding our portfolio with cutting-edge products and system solutions
- ✓ Staying ahead of architectural and construction trends
- ✓ Ensuring product quality through certified testing by accredited laboratories
- ✓ Constantly investing in employee education and professional development
- ✓ Partnering exclusively with suppliers who uphold our standards

---

Driven by expertise, passion, and a strong sense of responsibility, we strive to offer products that meet the highest standards in design, durability, and sustainability.

Today, with a workforce of over 800 employees and a state-of-the-art production facility spanning 52,010 m<sup>2</sup>, Yavuz d.o.o. stands as a symbol of technological excellence, trust, and progress—both in Bosnia and Herzegovina and across international markets.

As the company we are proud to deliver **certified uPVC profiles and complete carpentry solutions** that combine aesthetics, performance, and precision engineering.

## uPVC profiles producer

Looking for the perfect blend of style, durability, and energy efficiency?  
Our uPVC profiles are the ideal choice for your windows and doors!

Built to withstand harsh weather conditions, ensuring long-lasting performance. Keep your home comfortable year-round and save on energy bills with our thermally efficient profiles. Easy to clean and maintain, giving you more time to enjoy your home. Available in a variety of colors and styles to match your unique taste and home decor.

**Transform your living spaces with the best in uPVC technology.**



### Raw material

At our company, we believe that exceptional products begin with the finest raw materials. That's why we source our uPVC raw materials from the USA, ensuring top-notch quality and performance in every profile we produce.

### Gaskets

We understand that the smallest components can make the biggest difference. That's why we use only the highest quality gaskets in our uPVC profiles, ensuring optimal performance and longevity.



### Steel reinforcement

Our uPVC profiles come with the option for steel reinforcement and a variety of multi-point locking systems places that make them among the safest and securest systems on the market.



## Types of opening

Window and door types are distinguished by their way of installation and opening.

### FIXED GLAZING

The glazing is inserted directly into the frame – there is no sash that could be opened.

### TILT-AND-TURN FUNCTION

The window can be opened to the inside like a casement and it can be tilted.

### CASEMENT – OUTWARD OPENING

The sash is to be opened outwards.

### MULTI-SLIDE

The sash can be slid to the side to open the window. Multiple sashes can be used to stack

### TILT-AND-SLIDE

The sash can be tilted and slid to one side to open the window.

### SLIDE AND FOLD

The sashes can be folded, each running along a runner rail.

### SMART-SLIDE

The sash is shifted off the gasket horizontally and slides, providing superior tightness against weather and noise. Multiple sashes can be used to stack



### Many combinations available.

With our uPVC profiles and additional materials, you can create various types of windows and doors.

# Certificates

Our uPVC profiles are certified by authorized laboratories, ensuring they meet the highest standards of quality and safety. These certifications reflect our commitment to excellence and our dedication to providing reliable and innovative products to our customers.



Quality and certified



Scan code and check all our certificates!

**Certified in IFT Rosenheim.**  
Internationally accredited and notified testing laboratory based in Rosenheim, Germany.

# Export map

Our products are proudly exported to over 25 countries worldwide, showcasing our commitment to global reach and quality. Explore our export map to see how we connect with customers around the globe.

## Europe


-  Albania
-  B&H
-  Bulgaria
-  Croatia
-  England
-  France
-  Greece
-  Germany
-  Hungary
-  Italy
-  Kosovo
-  Macedonia
-  Malta
-  Montenegro
-  Netherlands
-  Romania
-  Serbia
-  Slovenia
-  Turkey

## Asia

-  South Korea
-  Saudi Arabia

## South America

-  Argentina
-  Bolivia
-  Chile

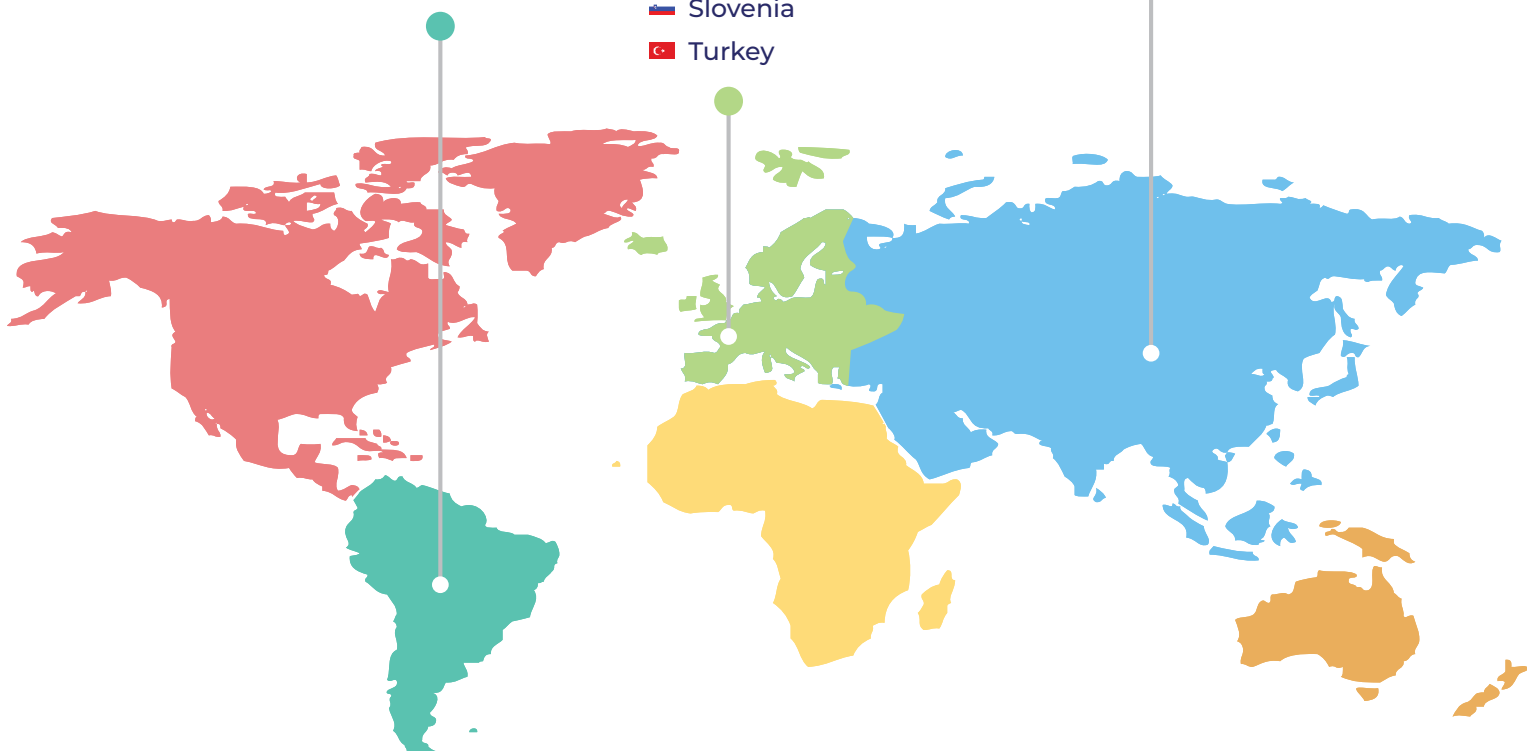

### Don't see your country?

If you want to be our distributor or need more information, you can always contact us. You can find all additional information on our website [www.baufens.ba](http://www.baufens.ba)

# Color chart


## Premium range of lamination foils for uPVC profiles

Elevate your spaces with our premium range of uPVC profiles, available in striking colors such as White, Mahogany, Anthracite, Golden Oak, Dark Oak, Nussbaum, and Jet Black. Behind every gorgeous finish is our commitment to excellence: we use only high-quality lamination foils for each uPVC profile.


Our lamination foils are designed for superior durability and aesthetics, ensuring long-lasting color vibrancy and resistance to fading, scratches, and weathering. Each foil is carefully selected to complement the unique texture and grain of natural wood finishes, as well as modern, sleek tones—giving you the best of both worlds: style and strength.

Whether you desire a classic wood look or a contemporary touch, our advanced foil technology keeps your windows and doors looking new for years to come. These foils also offer enhanced UV protection and easy-to-clean surfaces, making our uPVC profiles ideal for both residential and commercial applications.

With our quality commitment and wide selection, you can trust our uPVC profiles to deliver not only visual appeal but also long-lasting performance—no matter the color or finish you choose.



Color: **White**  
Color code: **9016**



Color: **Anthracite**  
Color code: **7016**



Color: **Mahogany**  
Color code: **8015**




Color: **Golden Oak**  
Color code: **8001**



Color: **Dark Oak**  
Color code: **8007**



Color: **Nussbaum**  
Color code: **8028**



Color: **Jet Black**  
Color code: **9005**

### Premium German lamination foils by Continental

Our uPVC profiles feature lamination foils produced in Germany, guaranteeing outstanding quality and precision. Crafted by Continental, these foils deliver reliable color stability, scratch resistance, and long-lasting aesthetics trusted by professionals worldwide.



# Energy Efficiency

uPVC windows and doors offer excellent thermal insulation, helping to reduce energy bills by keeping indoor temperatures stable.





Premium



# 8500 Supremo

The A-Class 8500 system is designed for clients who desire a combination of contemporary elegance, practicality, and functionality. It guarantees top-tier comfort and significantly improves the quality of life for all its users.



## 7 chambers

Featuring seven-chamber technology, this system is engineered for superior thermal and sound insulation.



## 3 gaskets

Three levels of ventilation ensure excellent windproofing, optimal wind protection, and superior sound insulation.



## Triple glass

Available with double glass of 24mm, three-layer 36mm glass and triple 44mm glazing bead.



## 85mm width

Our 85mm width uPVC profile offers exceptional durability, energy efficiency, and a sleek design.



Quality and certified



## Standard colors of our uPVC profiles

All other colors can be made to order



White



Anthracite



Golden Oak



Dark Oak



Nussbaum



Jet Black



Mahogany

## Why to choose our products?

Our PVC window and door systems are manufactured using advanced technology and provide an excellent level of acoustic and thermal insulation, achieving the highest quality standards available.



Environment Friendly



Easy Installation



Cost Effective



Noise Reduction



Can be recycled



Less Maintenance



Fire Retardant



Long life



Thermal Insulation



Modern design



### Premium uPVC profiles

Created from high-quality raw materials



### Innovation

Enhanced durability and energy efficiency for construction needs




### Reliability

Our uPVC profiles are designed for unmatched reliability




Scan code and read more informations about this uPVC profile series.


**BF 8581**  
Frame profile

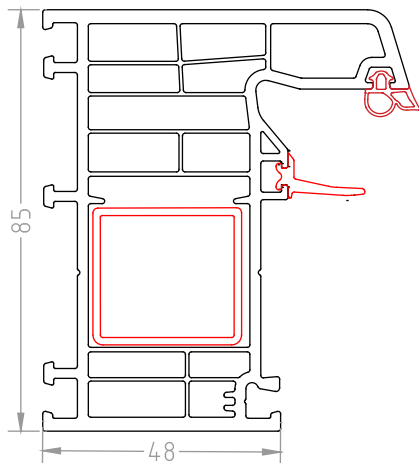


**BF 8582**  
Sash profile

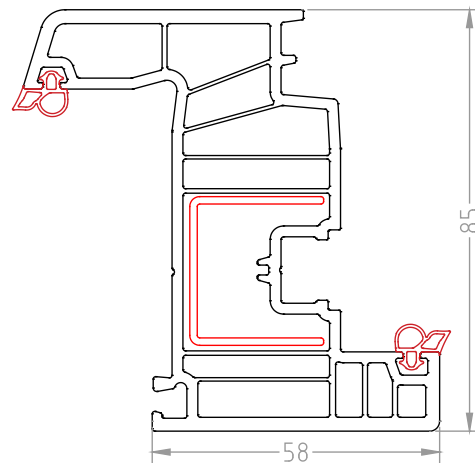


**BF 8583**  
In turn door sash profile

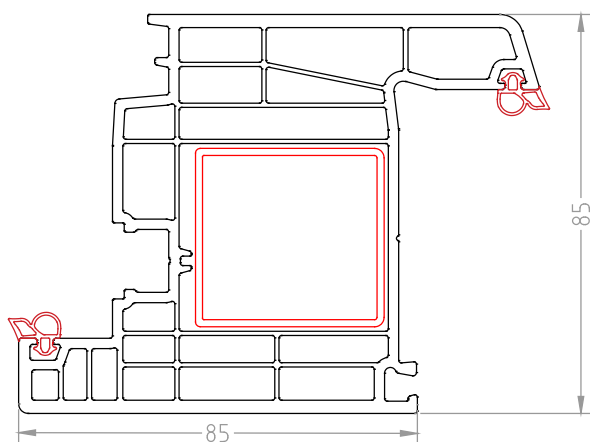


**BF 8584**  
Outward opening door sash profile

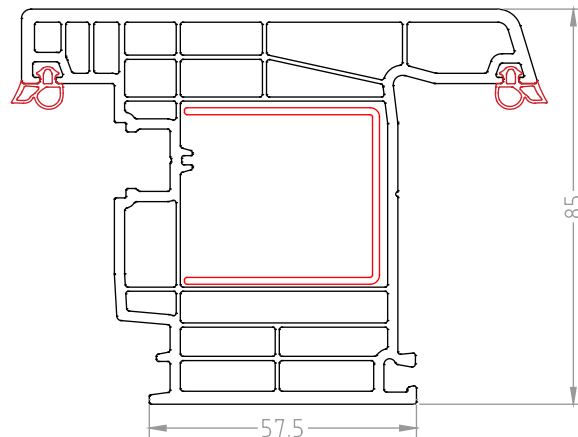


**BF 8545**  
Renovation frame  
*Frame with cornice*

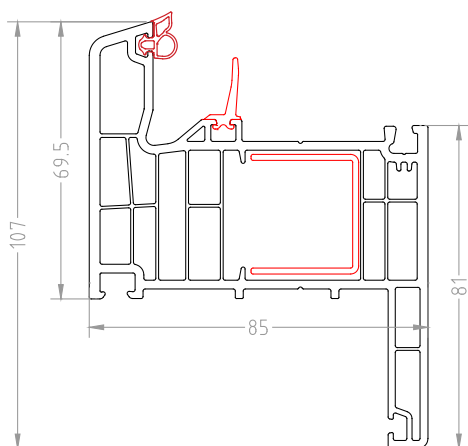


**BF 8585**  
Mullion (T-bar) profile

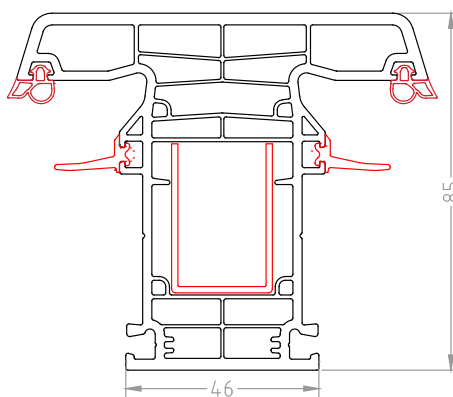


**BF 8586**  
False mullion profile

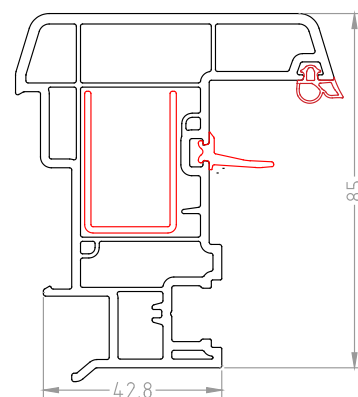


**BF 8509**  
Double glazing bead  
24 mm

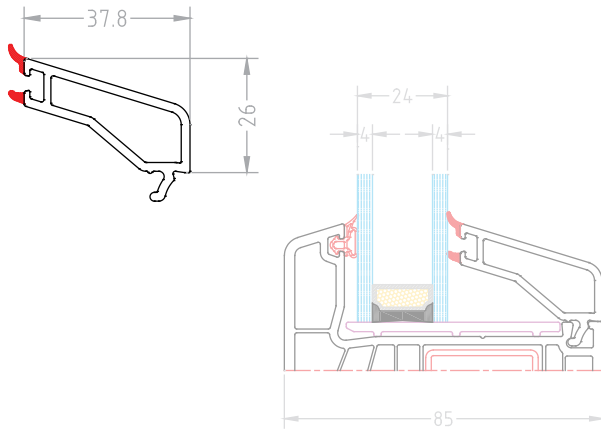


**BF 7609**  
Triple glazing bead  
32 mm

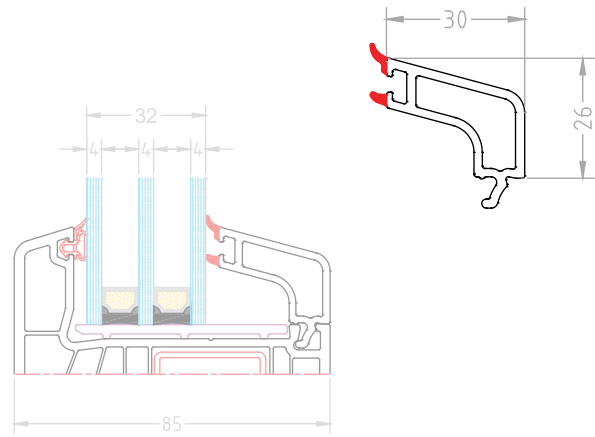


**BF 8508**  
Triple glazing bead  
36 mm

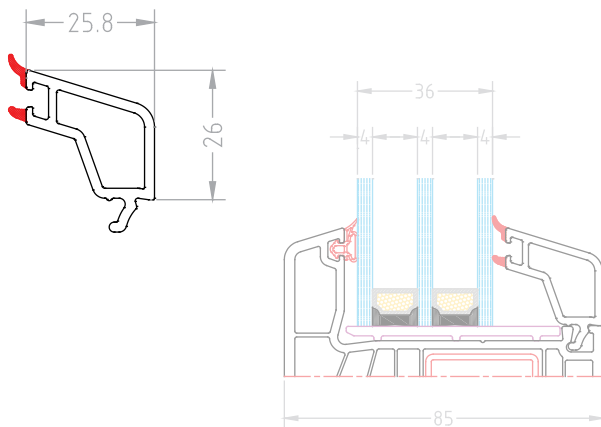

**BF 8510**  
Triple glazing bead  
44 mm

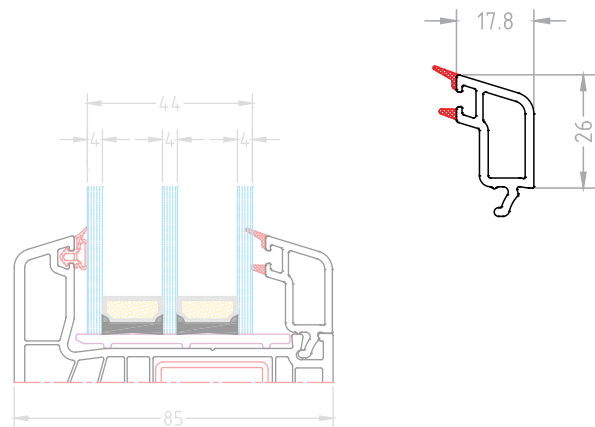

**BF 7054**  
Triple glazing bead  
52.50 mm

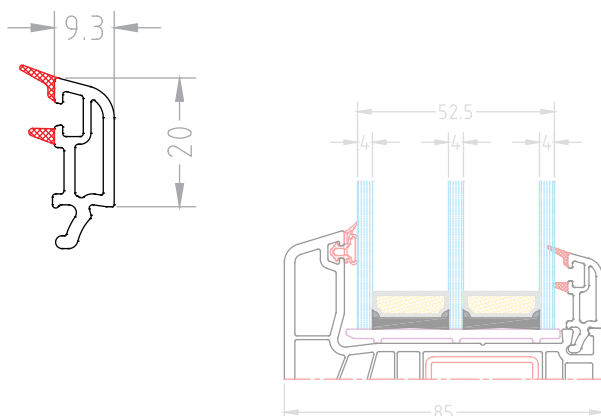


## Glazing Beads for uPVC Windows and Doors


Glazing beads are crucial components in uPVC windows and doors, ensuring the glass panes are securely held in place while providing a neat and finished appearance. These beads are typically made from the same uPVC material as the window or door frames, ensuring a seamless and cohesive look.

*Durability*  
*Low Maintenance*  
*Energy Efficiency*


**BF 8520**  
Profile extension  
85\*100mm




**BF 8507**  
Profile extension  
85\*25mm




**BF 8535**  
Connecting pillar




**BF 8517**  
Treshold




**BF 5025**  
Additional cornice  
part - Adaptor




**BF 8536**  
Window Drainboard



**BF 7208**  
Blind box extension



**BF 8588**  
Corner Connector  
Chocks




**BF 8518**  
Treshold cap 85




**BF 8589**  
False mullion cap




**OKBT 85**  
Mullion (T-bar)  
coupling 85




**BF 8531**  
Angle connection pipe



**BF 8542**  
Pipe adaptor




**BF 7202**  
Connecting molding



## Iron reinforcement

Can be used for:

**BF 8501, BF 8521 and BF 8581** Frame, **BF 8502, BF 8522 and BF 8582** Sash, and **BF 8545** Frame with cornice

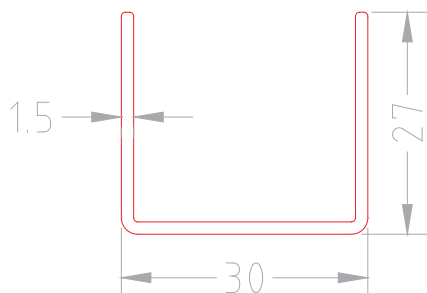


**BF 409-12** (Thickness 1.2mm) **BF 409-15** (Thickness 1.5mm) **BF 409-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for:

**BF 8503, BF 8504, BF 8523, BF 8583** and **BF 8584** Door sash

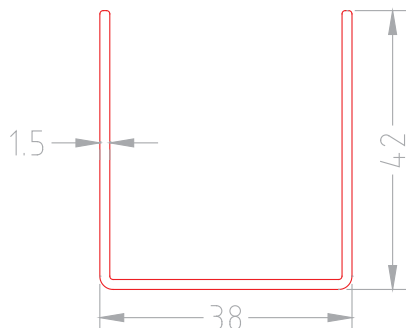


**BF 410-12** (Thickness 1.2mm) **BF 410-15** (Thickness 1.5mm) **BF 410-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for:

**BF 8506, BF 8526 and BF 8586** False mullion profile

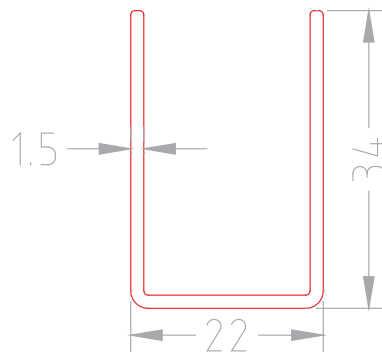


**BF 411-12** (Thickness 1.2mm) **BF 411-15** (Thickness 1.5mm) **BF 411-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for:

**BF 8505, BF 8525 and BF 8585** Mullion (T-bar) profile

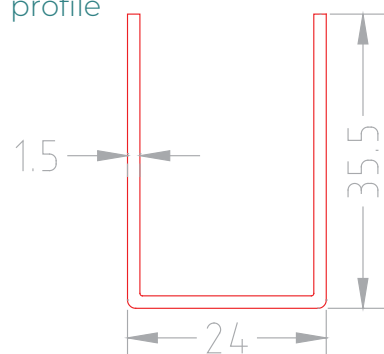


**BF 414-12** (Thickness 1.2mm) **BF 414-15** (Thickness 1.5mm) **BF 414-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for:

**BF 8520** Profile extension 100mm

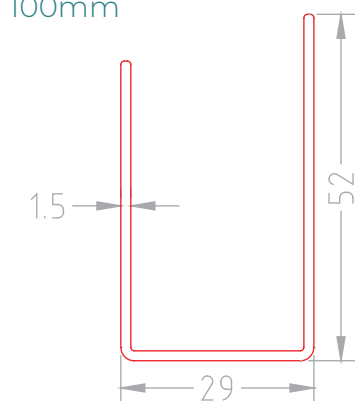


**BF 407-12** (Thickness 1.2mm) **BF 407-15** (Thickness 1.5mm) **BF 407-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for:

**BF 8507** Profile extension 25mm




**BF 408-12** (Thickness 1.2mm) **BF 408-15** (Thickness 1.5mm) **BF 408-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for:

**BF 8505, BF 8525 and BF 8585** Mullion (T-bar) profile




**BF 415-12** (Thickness 1.2mm) **BF 415-15** (Thickness 1.5mm) **BF 415-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for:

**BF 8501, BF 8521 and BF 8581** Frame, **BF 8502, BF 8522 and BF 8582** Sash, and **BF 8545** Frame with cornice

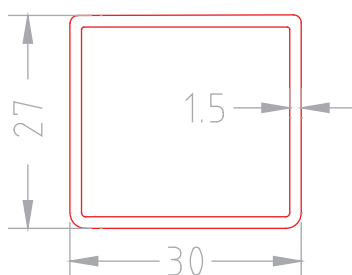


**BF 413-12** (Thickness 1.2mm) **BF 413-15** (Thickness 1.5mm) **BF 413-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for:


**BF 8504, BF 8523, BF 8583** and **BF 8584** Door sash

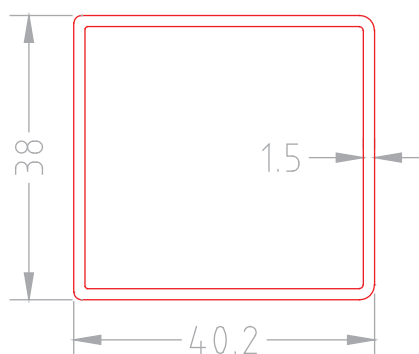

**BF 416-12** (Thickness 1.2mm) **BF 416-15** (Thickness 1.5mm) **BF 416-20** (Thickness 2.0mm)


## DOOR SYSTEM

Application of frame and door sash

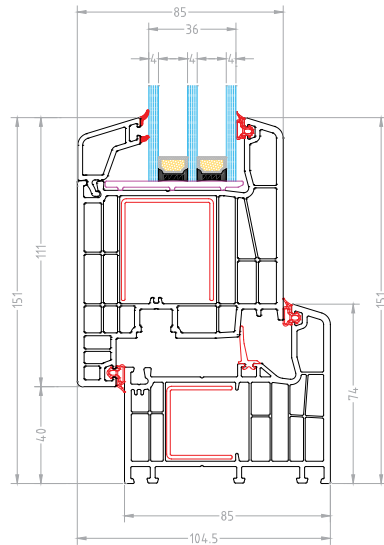


## WINDOW SYSTEM

Application of frame and window sash

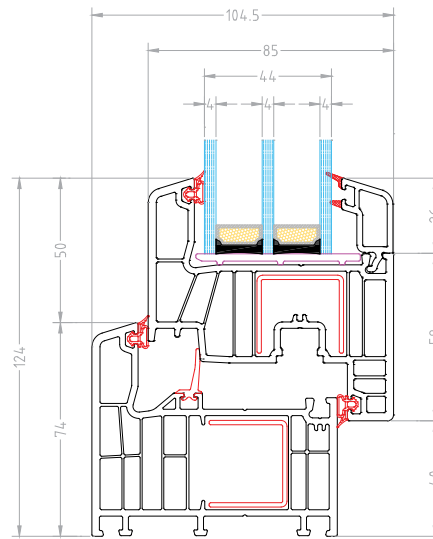


## DOOR SYSTEM

Application of frame and outward opening door sash

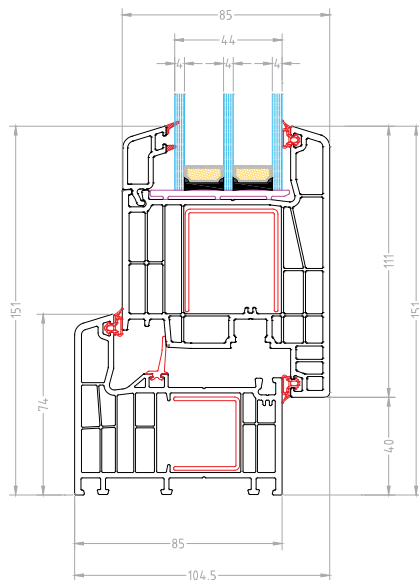


## WINDOW SYSTEM

Application of sash and false mullion profile

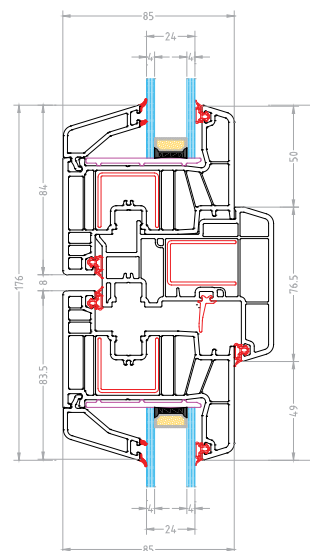


## WINDOW SYSTEM

Application of door sash and Mullion (T-bar) profile

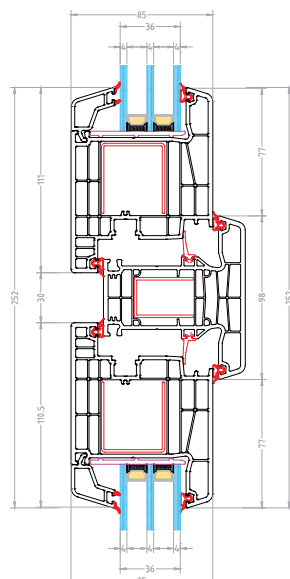


## WINDOW SYSTEM

Application of frame, sash and connecting pillar

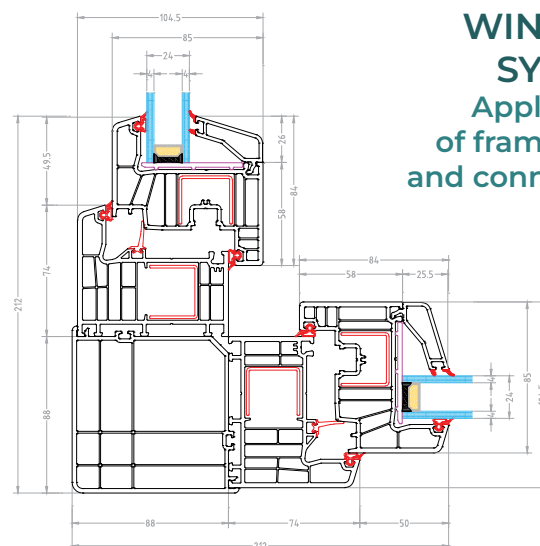


## DOOR SYSTEM

Application of frame extension 25mm

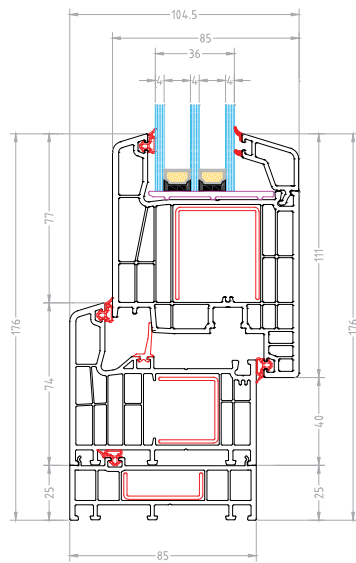


## DOOR SYSTEM

Application of frame extension 100mm

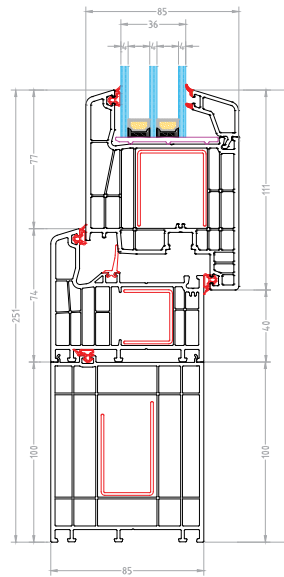


## DOOR SYSTEM

Application of 24mm door panel

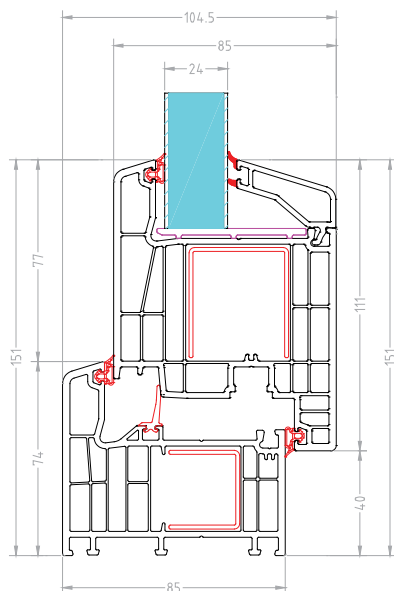


## DOOR SYSTEM

Application of 36mm door panel

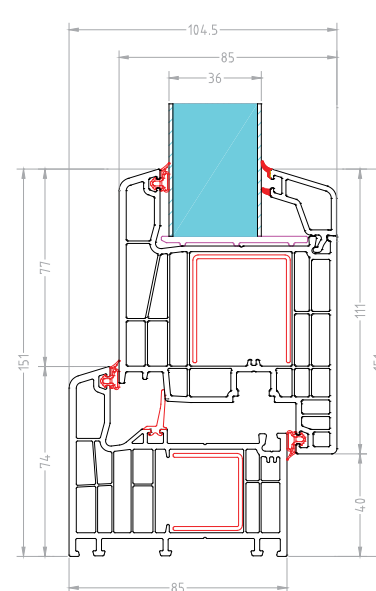


## DOOR SYSTEM

Application of door sash, treshold and drainboard

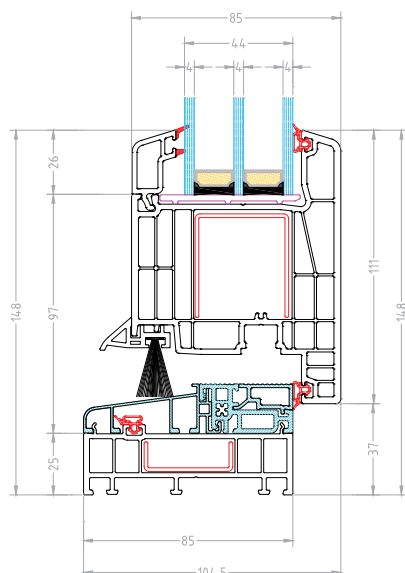


## WINDOW SYSTEM

Application of connection molding

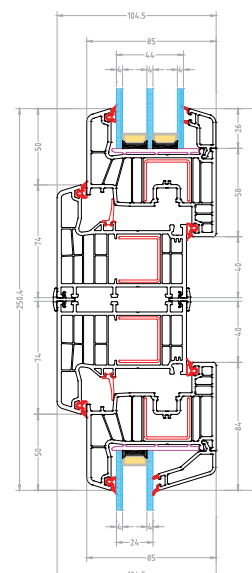


## WINDOW SYSTEM

Application of additional cornice part on the wall

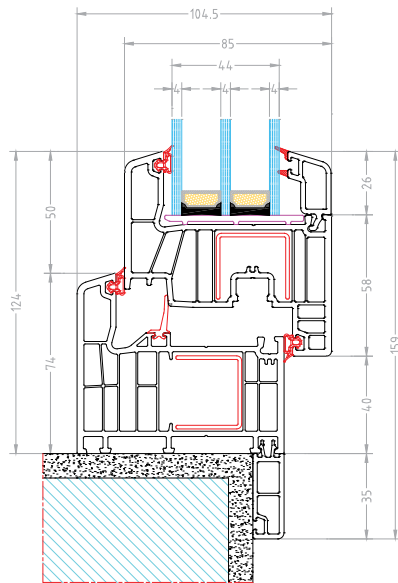


## WINDOW SYSTEM

Drainage view

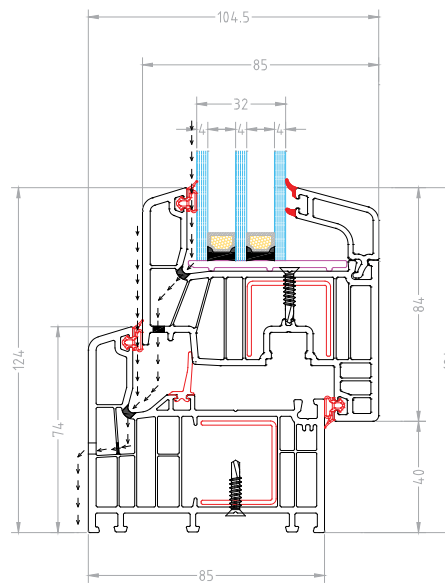

## WINDOW SYSTEM

Application of outside ALU window sill and inside PVC window sill

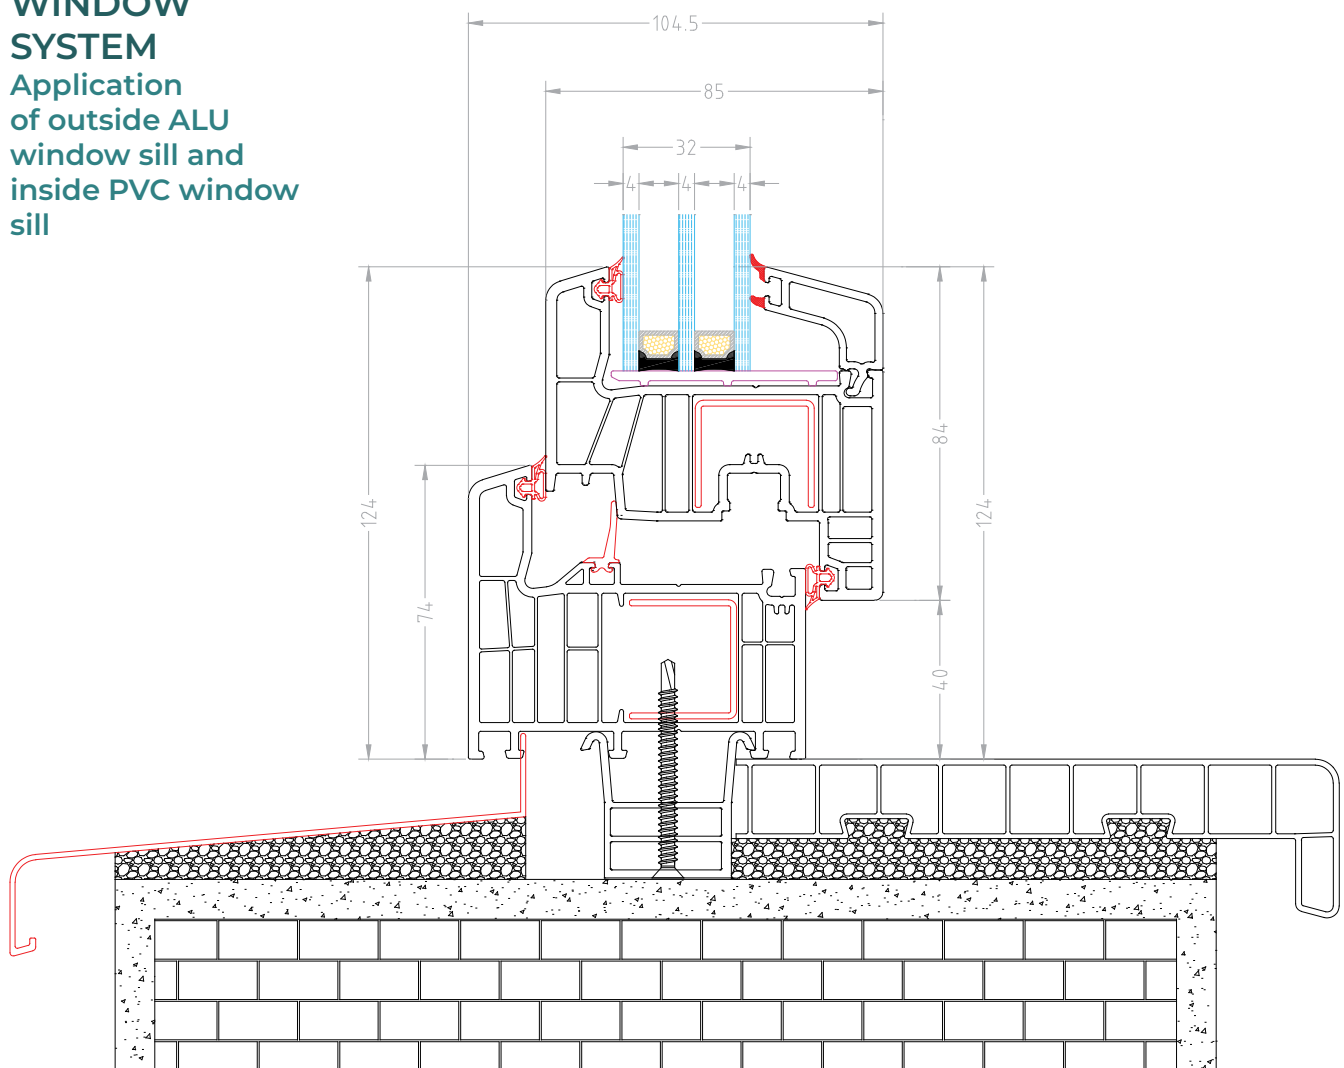



## **Weather Resistance**

uPVC profiles are highly resistant to weathering, including rain, wind, and sunlight, making them ideal for outdoor applications without fading or corroding.



# 8500 Platinum

The 8500 Platinum system offers modern elegance, practicality, and functionality, ensuring exceptional comfort and enhancing users' quality of life.



## 7 chambers

Featuring seven-chamber technology, this system is engineered for superior thermal and sound insulation.



## 3 gaskets

Three levels of ventilation ensure excellent windproofing, optimal wind protection, and superior sound insulation.



## Triple glass

Available with double glass of 24mm, three-layer 36mm glass and triple 44mm glazing bead.



## 85mm width

Our 85mm width uPVC profile offers exceptional durability, energy efficiency, and a sleek design.



Quality and certified



## Standard colors of our uPVC profiles

All other colors can be made to order



White



Anthracite



Golden Oak



Dark Oak



Nussbaum



Jet Black



Mahogany

## Why to choose our products?

Our PVC window and door systems are manufactured using advanced technology and provide an excellent level of acoustic and thermal insulation, achieving the highest quality standards available.



Environment  
Friendly



Easy  
Installation



Cost  
Effective



Noise  
Reduction



Can be  
recycled



Less  
Maintenance



Fire  
Retardant



Long  
life



Thermal  
Insulation



Modern  
design



### Premium uPVC profiles

Created from high-quality raw materials



### Innovation

Enhanced durability and energy efficiency for construction needs




### Reliability

Our uPVC profiles are designed for unmatched reliability




Scan code and read more informations about this uPVC profile series.


**BF 8501**  
Frame profile

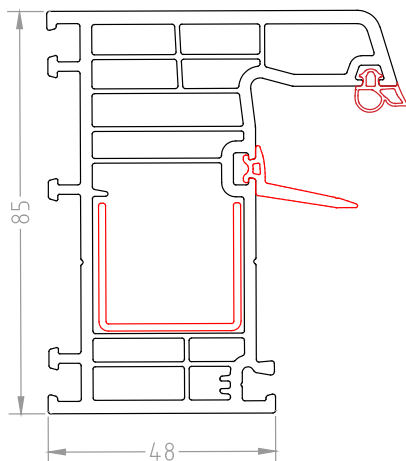


**BF 8502**  
Sash profile

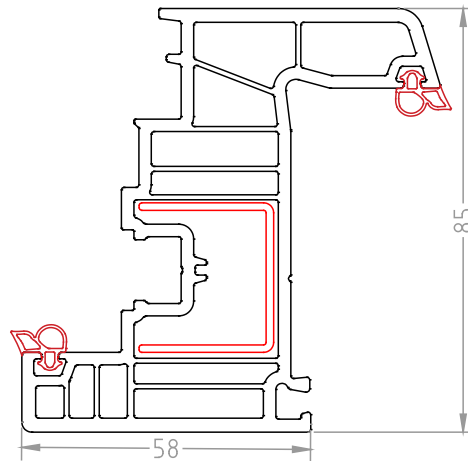


**BF 8503**  
In turn door sash profile

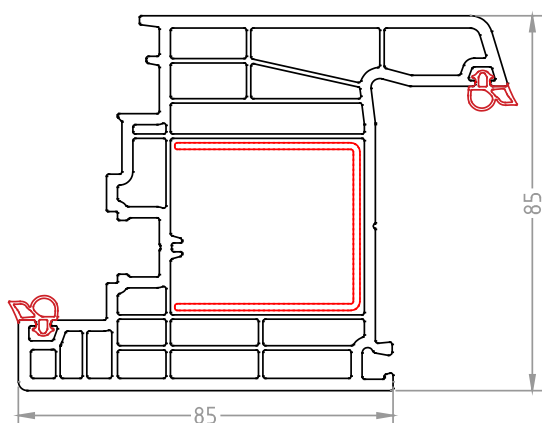


**BF 8504**  
Outward opening door sash profile

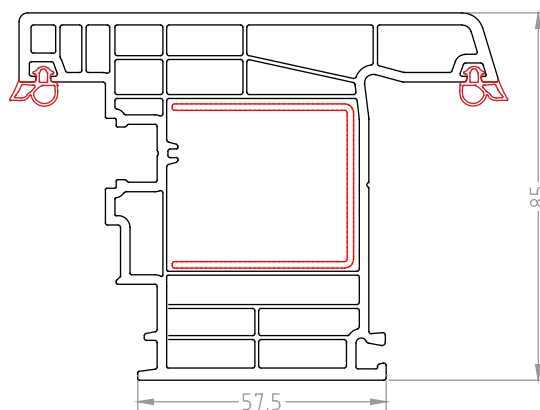


**BF 8505**  
Mullion (T-bar) profile

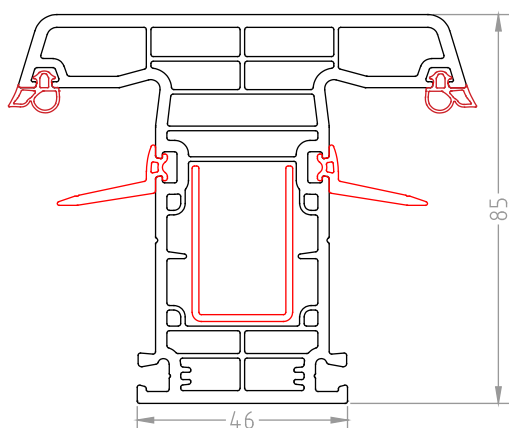


**BF 8506**  
False mullion profile

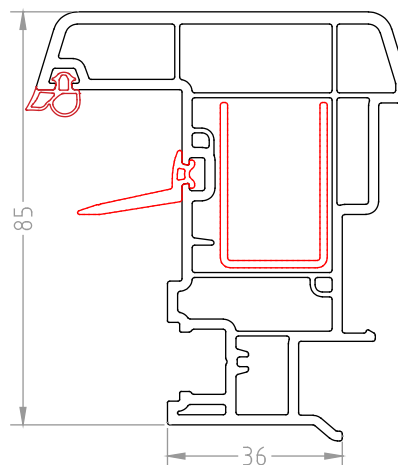


**BF 8509**  
Double glazing bead  
24 mm

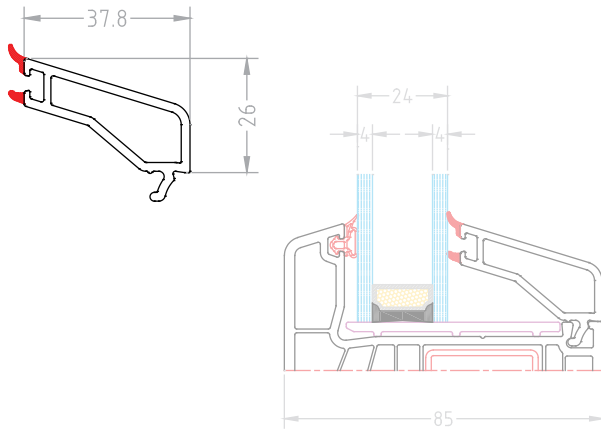


**BF 7609**  
Triple glazing bead  
32 mm

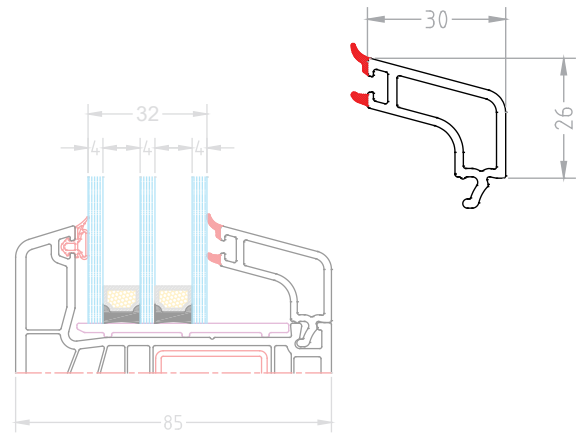


**BF 8508**  
Triple glazing bead  
36 mm

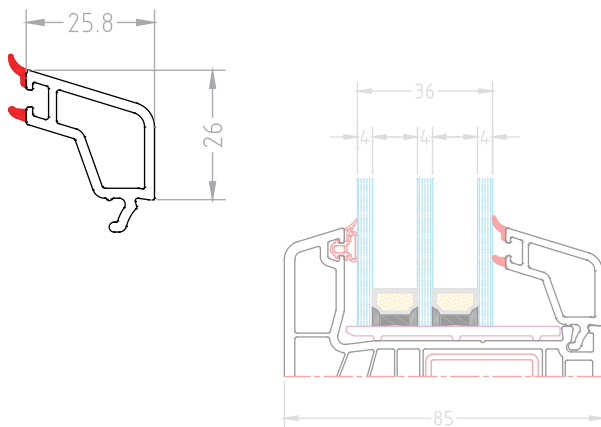

**BF 8510**  
Triple glazing bead  
44 mm

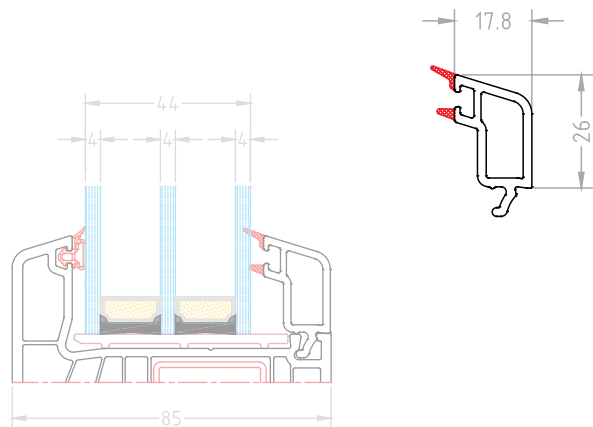

**BF 7054**  
Triple glazing bead  
52.50 mm

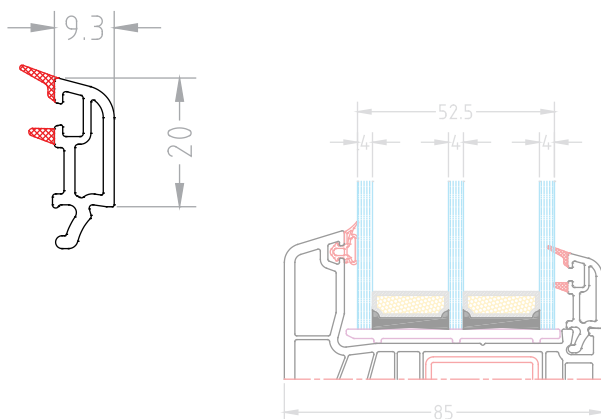


## Glazing Beads for uPVC Windows and Doors


Glazing beads are crucial components in uPVC windows and doors, ensuring the glass panes are securely held in place while providing a neat and finished appearance. These beads are typically made from the same uPVC material as the window or door frames, ensuring a seamless and cohesive look.

*Durability*  
*Low Maintenance*  
*Energy Efficiency*


**BF 8520**  
Profile extension  
85\*100mm




**BF 8507**  
Profile extension  
85\*25mm




**BF 8535**  
Connecting pillar




**BF 8517**  
Treshold




**BF 5025**  
Additional cornice  
part - Adaptor



**BF 8536**  
Window Drainboard



**BF 7208**  
Blind box extension




**BF 8518**  
Treshold cap 85




**BF 8519**  
False mullion cap 85




**OB 0121**  
Mullion (T-bar)  
coupling 85




**BF 8531**  
Angle connection pipe



**BF 8542**  
Pipe adaptor




**BF 7202**  
Connecting molding



## Iron reinforcement

Can be used for:


**BF 8501, BF 8521 and BF 8581** Frame, **BF 8502, BF 8522** and **BF 8582** Sash, and **BF 8545** Frame with cornice

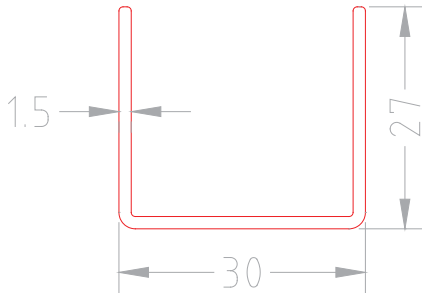

**BF 409-12** (Thickness 1.2mm) **BF 409-15** (Thickness 1.5mm) **BF 409-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for: **BF 8503, BF 8504, BF 8523, BF 8583** and **BF 8584** Door sash

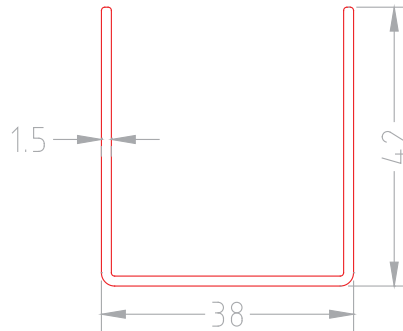


**BF 410-12** (Thickness 1.2mm) **BF 410-15** (Thickness 1.5mm) **BF 410-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for:

**BF 8506, BF 8526** and **BF 8586** False mullion profile

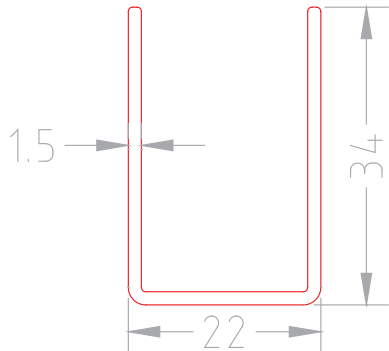


**BF 411-12** (Thickness 1.2mm) **BF 411-15** (Thickness 1.5mm) **BF 411-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for:

**BF 8505, BF 8525** and **BF 8585** Mullion (T-bar) profile

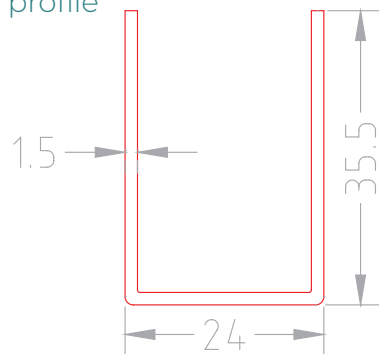


**BF 414-12** (Thickness 1.2mm) **BF 414-15** (Thickness 1.5mm) **BF 414-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for:

**BF 8520** Profile extension 100mm

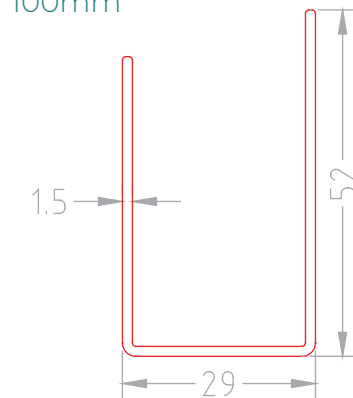


**BF 407-12** (Thickness 1.2mm) **BF 407-15** (Thickness 1.5mm) **BF 407-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for:

**BF 8507** Profile extension 25mm

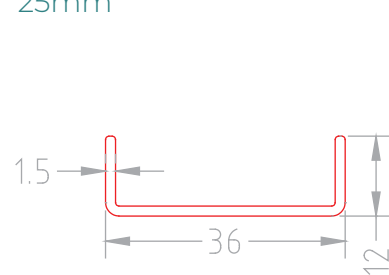


**BF 408-12** (Thickness 1.2mm) **BF 408-15** (Thickness 1.5mm) **BF 408-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for:

**BF 8505, BF 8525** and **BF 8585** Mullion (T-bar) profile




**BF 415-12** (Thickness 1.2mm) **BF 415-15** (Thickness 1.5mm) **BF 415-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for:

**BF 8501, BF 8521** and **BF 8581** Frame, **BF 8502, BF 8522** and **BF 8582** Sash, and **BF 8545** Frame with cornice

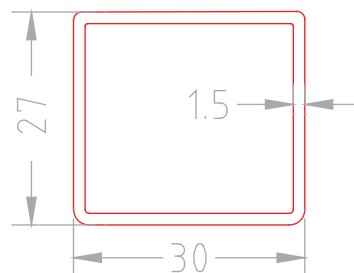


**BF 413-12** (Thickness 1.2mm) **BF 413-15** (Thickness 1.5mm) **BF 413-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for:


**BF 8504, BF 8523, BF 8583** and **BF 8584** Door sash

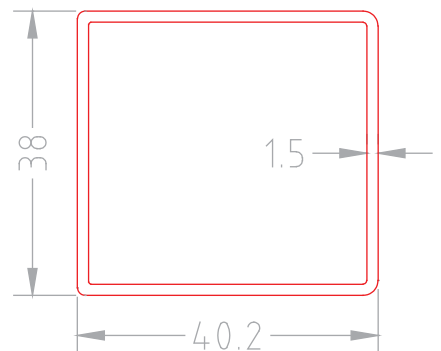

**BF 416-12** (Thickness 1.2mm) **BF 416-15** (Thickness 1.5mm) **BF 416-20** (Thickness 2.0mm)


## DOOR SYSTEM

Application  
of frame and  
door sash

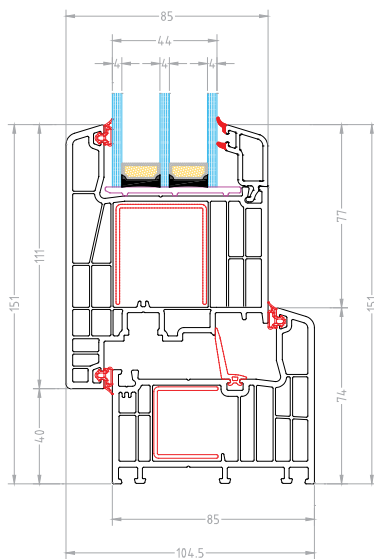


## WINDOW SYSTEM

Application  
of frame and  
window sash

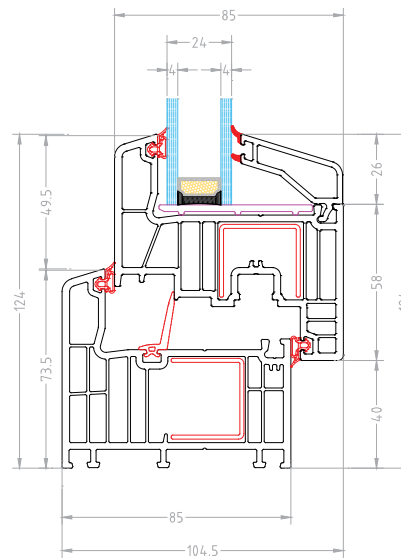


## DOOR SYSTEM

Application  
of frame and  
outward  
opening  
window  
sash

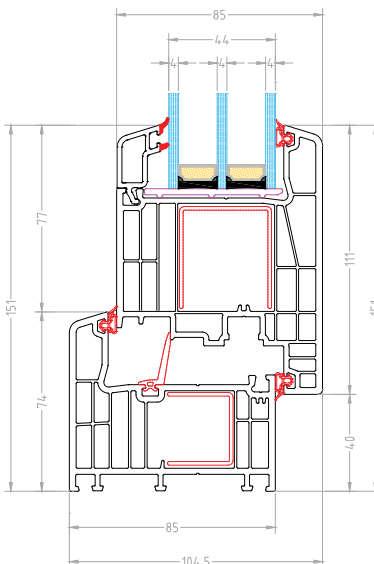


## WINDOW SYSTEM

Application  
of sash and  
false mullion  
profile

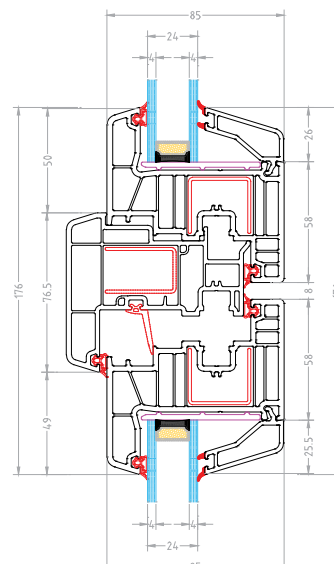


## WINDOW SYSTEM

Application  
of sash and Mullion  
(T-bar) profile

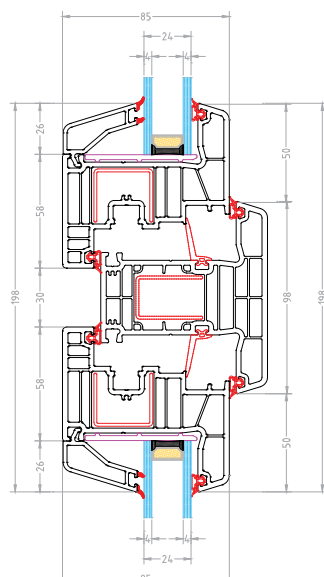


## WINDOW SYSTEM

Application  
of frame and  
sash with  
connecting  
pillar

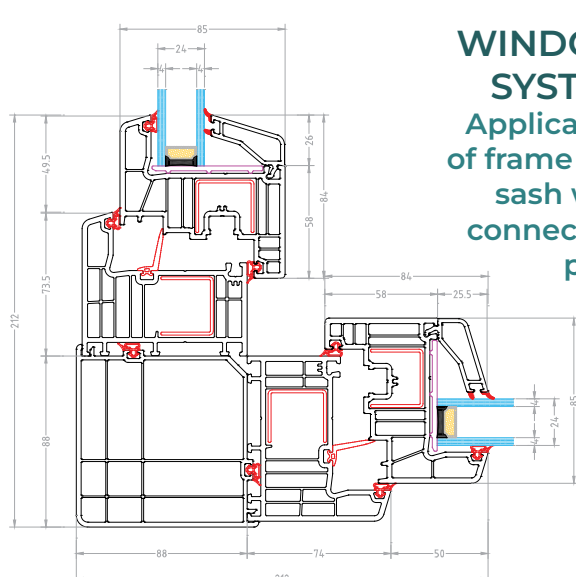


## DOOR SYSTEM

Application of frame extension 25mm

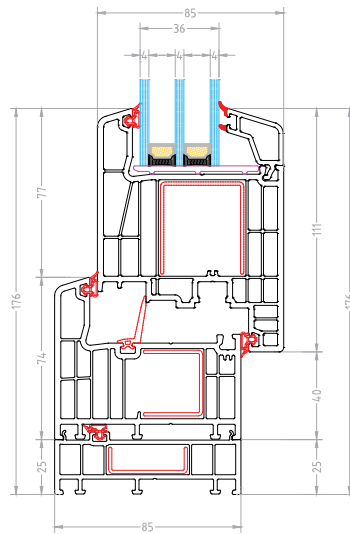


## DOOR SYSTEM

Application of frame extension 100mm

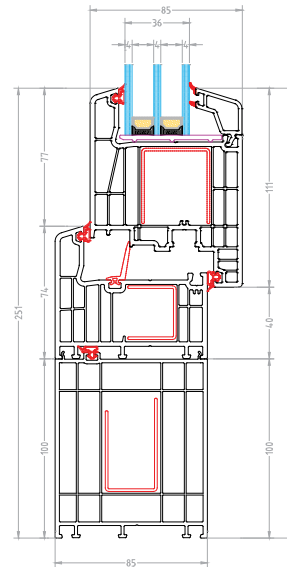


## DOOR SYSTEM

Application of 24mm door panel

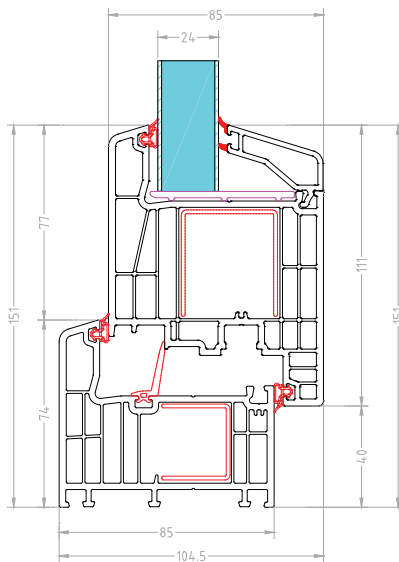


## DOOR SYSTEM

Application of 36mm door panel

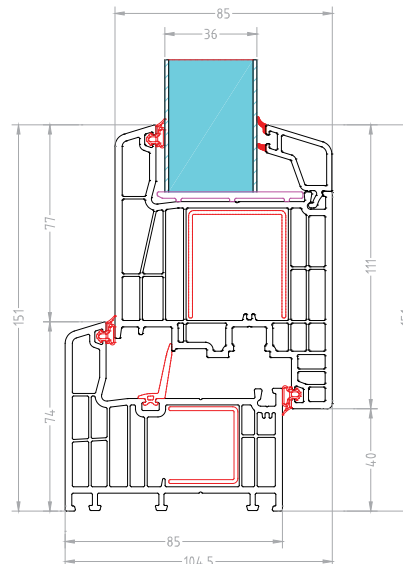


## DOOR SYSTEM

Application of door sash threshold and drainboard

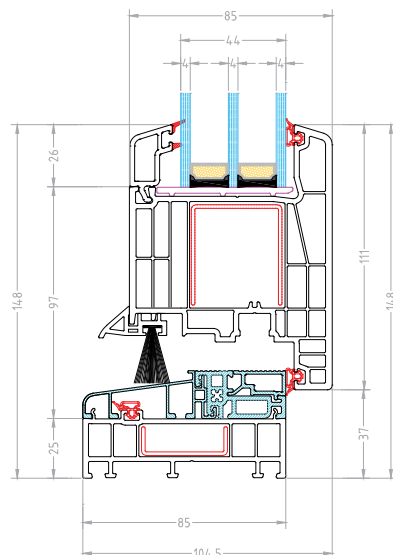


## DOOR SYSTEM

Application of connection molding

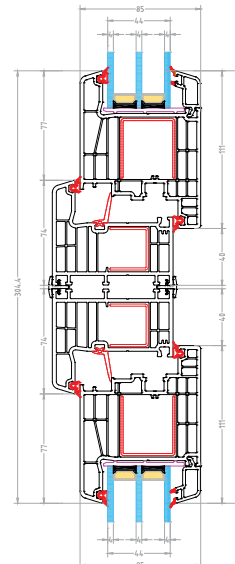


## WINDOW SYSTEM

Application of additional cornice part on the wall

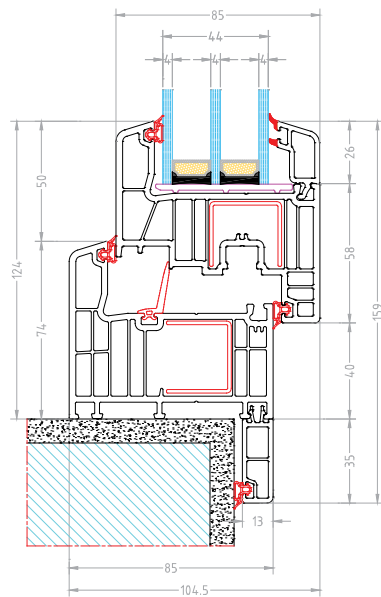


## WINDOW SYSTEM

Drainage view

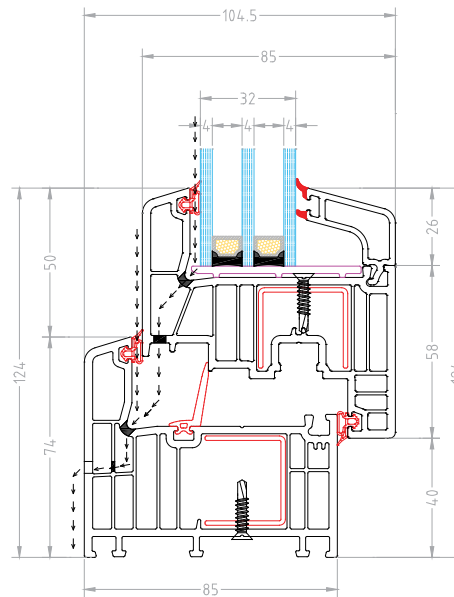

## WINDOW SYSTEM


Application of outside ALU window sill and inside PVC window sill

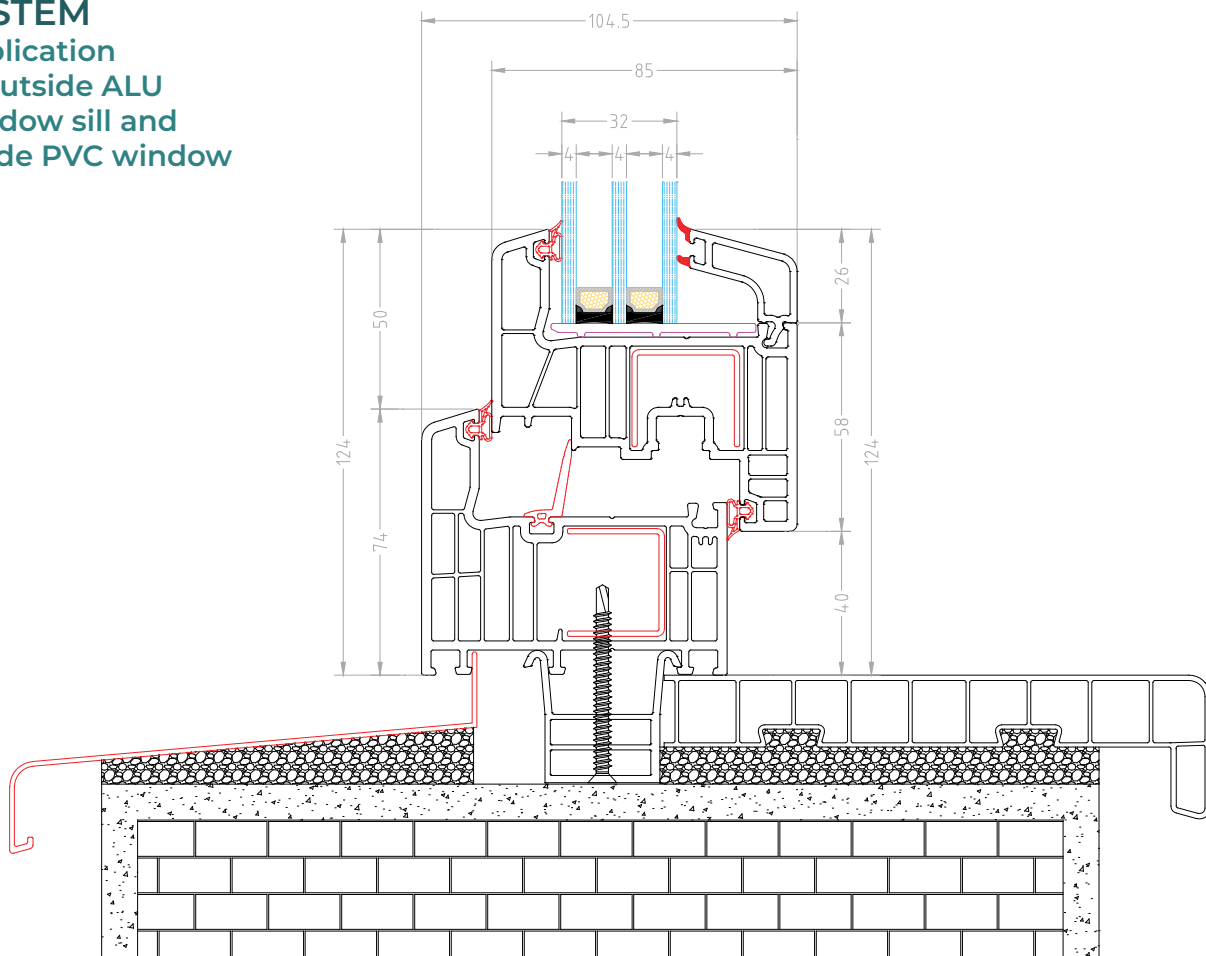

## Sound Insulation

Thanks to their multi-chambered design and tight seals, uPVC profiles provide effective soundproofing, ideal for homes in noisy environments.



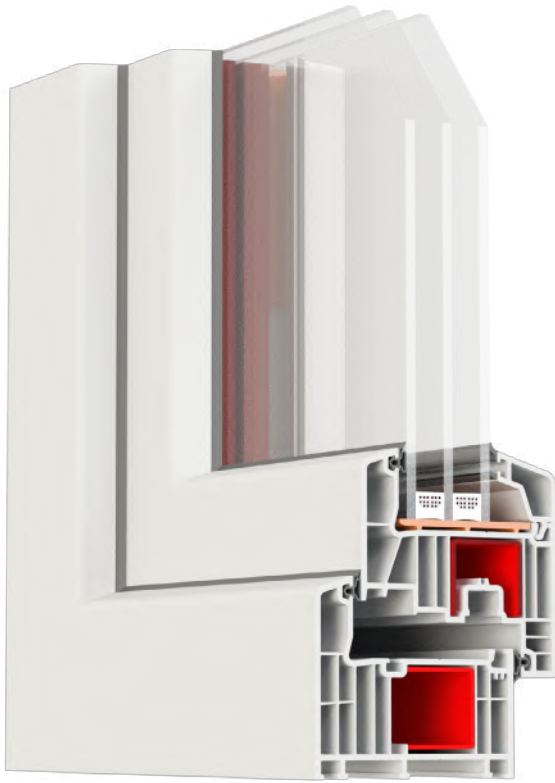

# 8500 Silver

The 8500 Silver system blends contemporary elegance, practicality, and functionality, delivering superior comfort and enhancing the quality of life for its users.



## 7 chambers

Featuring seven-chamber technology, this system is engineered for superior thermal and sound insulation.



## 2 gaskets

Two levels of ventilation ensure excellent windproofing, optimal wind protection, and superior sound insulation.



## Triple glass

Available with double glass of 24mm, three-layer 36mm glass and triple 44mm glazing bead.



## 85mm width

Our 85mm width uPVC profile offers exceptional durability, energy efficiency, and a sleek design.



Quality and certified



## Standard colors of our uPVC profiles

All other colors can be made to order



White



Anthracite



Golden Oak



Mahogany



Nussbaum



Jet Black



Dark Oak

## Why to choose our products?

Our PVC window and door systems are manufactured using advanced technology and provide an excellent level of acoustic and thermal insulation, achieving the highest quality standards available.



Environment  
Friendly



Easy  
Installation



Cost  
Effective



Noise  
Reduction



Can be  
recycled



Less  
Maintenance



Fire  
Retardant



Long  
life



Thermal  
Insulation



Modern  
design



### Premium uPVC profiles

Created from high-quality raw materials



### Innovation

Enhanced durability and energy efficiency for construction needs




### Reliability

Our uPVC profiles are designed for unmatched reliability




Scan code and read more informations about this uPVC profile series.


**BF 8521**  
Frame profile

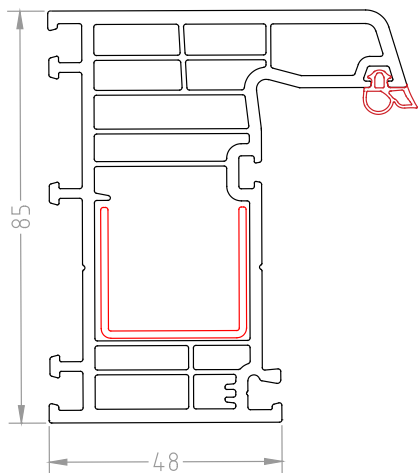


**BF 8522**  
Sash profile

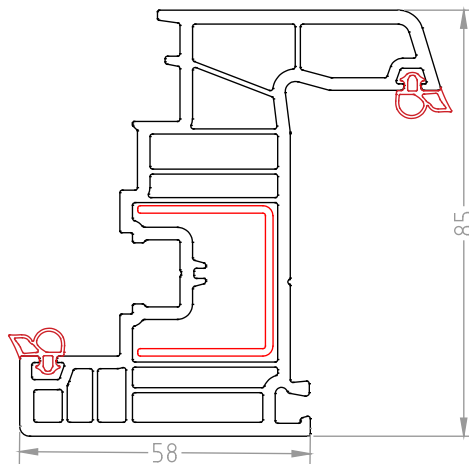


**BF 8523**  
In turn door sash profile

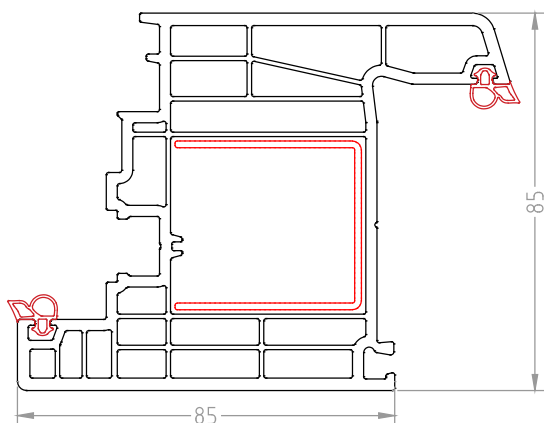


**BF 8504**  
Outward opening door sash profile

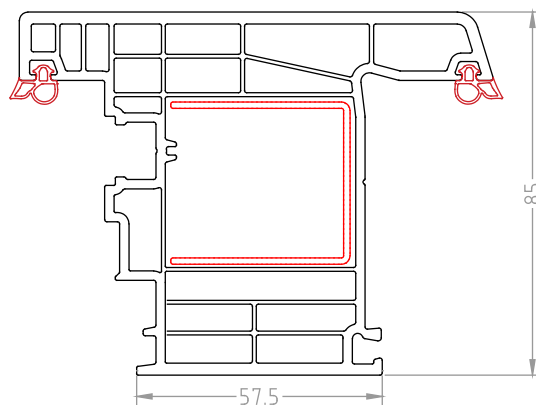


**BF 8525**  
Mullion (T-bar) profile

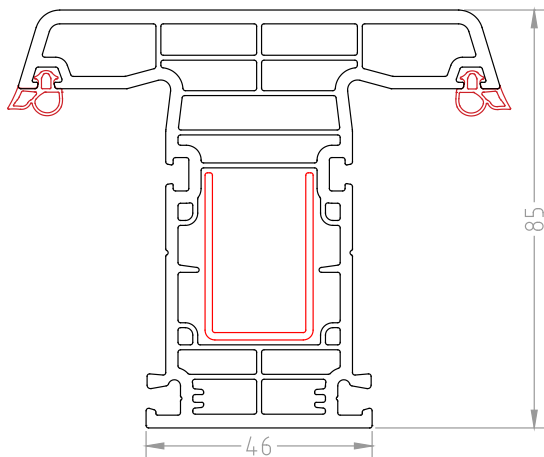


**BF 8526**  
False mullion profile

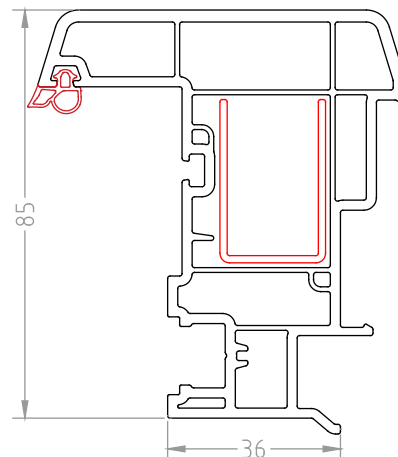


**BF 8509**  
Double glazing bead  
24 mm

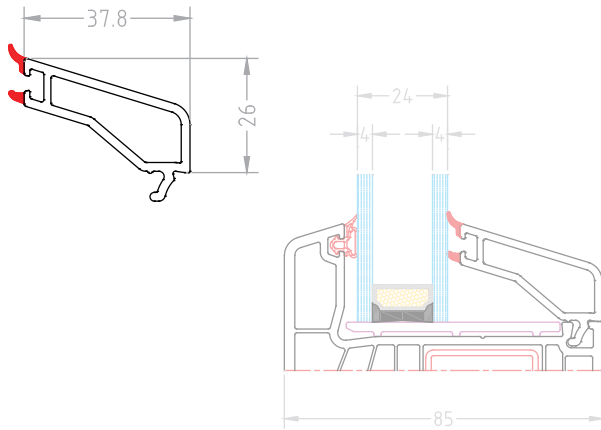


**BF 7609**  
Triple glazing bead  
32 mm

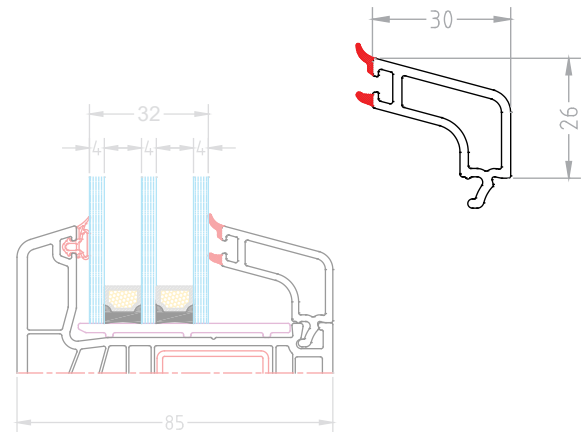


**BF 8508**  
Triple glazing bead  
36 mm

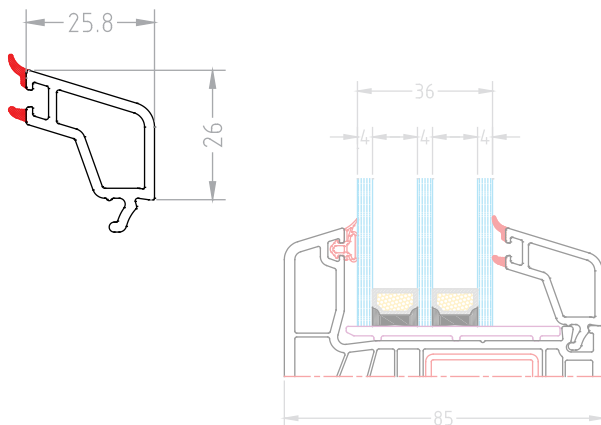

**BF 8510**  
Triple glazing bead  
44 mm

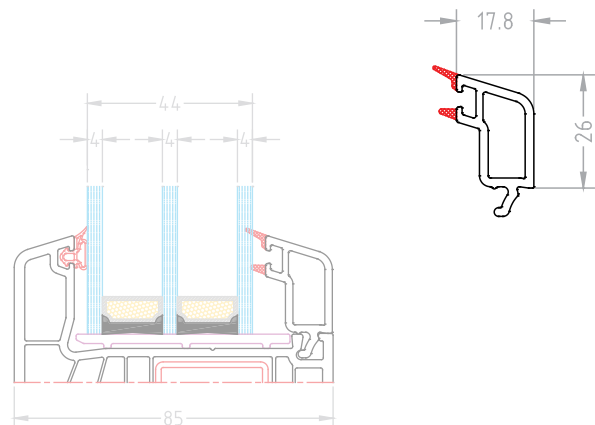

**BF 7054**  
Triple glazing bead  
52.50 mm

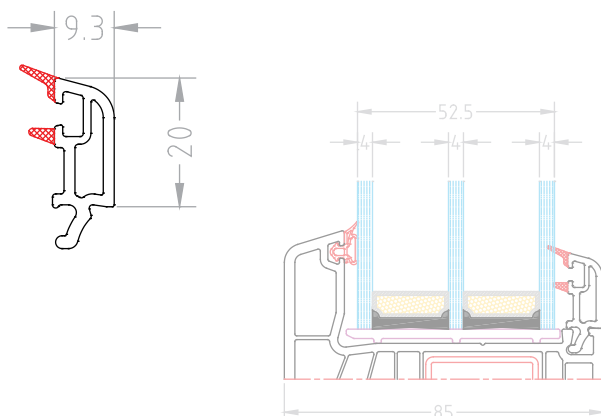


## Glazing Beads for uPVC Windows and Doors


Glazing beads are crucial components in uPVC windows and doors, ensuring the glass panes are securely held in place while providing a neat and finished appearance. These beads are typically made from the same uPVC material as the window or door frames, ensuring a seamless and cohesive look.

*Durability*  
*Low Maintenance*  
*Energy Efficiency*


**BF 8520**  
Profile extension  
85\*100mm




**BF 8507**  
Profile extension  
85\*25mm




**BF 8535**  
Connecting pillar




**BF 8517**  
Treshold




**BF 5025**  
Additional cornice  
part - Adaptor



**BF 8536**  
Window Drainboard



**BF 7208**  
Blind box extension




**BF 8518**  
Treshold cap 85




**BF 8519**  
False mullion cap 85




**OB 0121**  
Mullion (T-bar)  
coupling 85




**BF 8531**  
Angle connection pipe



**BF 8542**  
Pipe adaptor




**BF 7202**  
Connecting molding




## DOOR SYSTEM

Application of frame and door sash

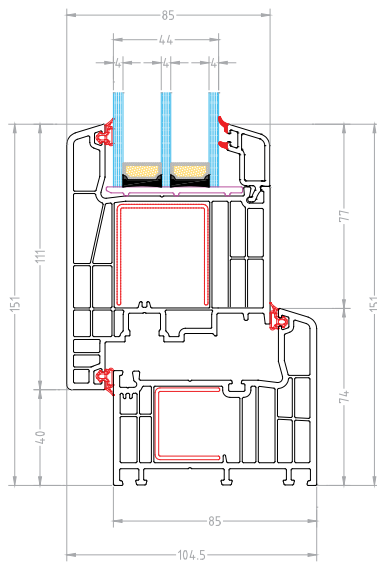


## WINDOW SYSTEM

Application of frame and window sash

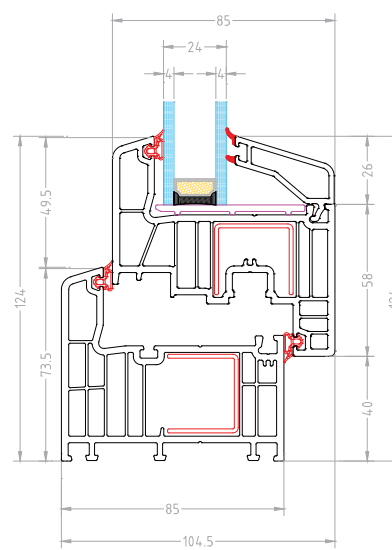


## DOOR SYSTEM

Application of frame and outward opening window sash

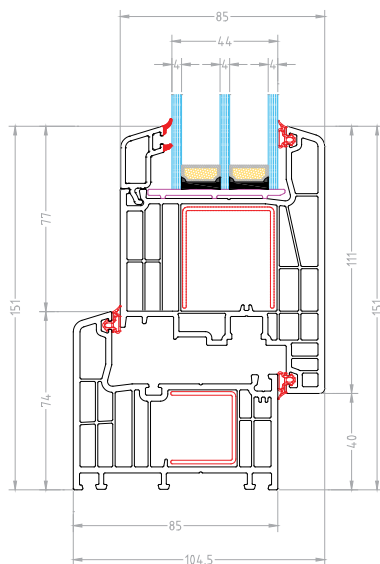


## WINDOW SYSTEM

Application of sash and false mullion profile

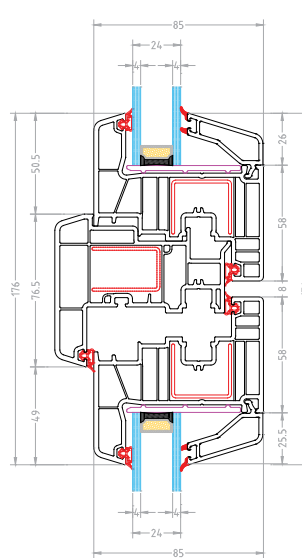


## WINDOW SYSTEM

Application of sash and Mullion (T-bar) profile

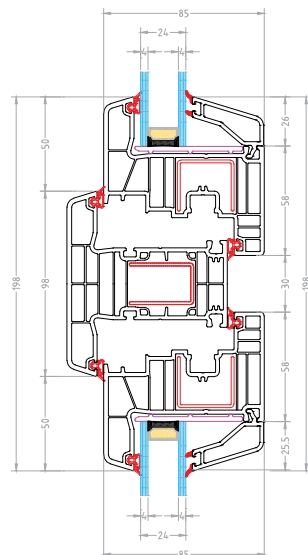


## WINDOW SYSTEM

Application of frame and sash with connecting pillar

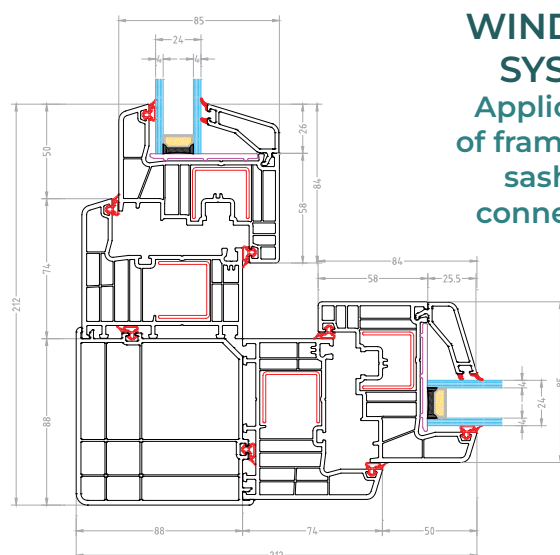


## DOOR SYSTEM

Application of frame extension 25mm

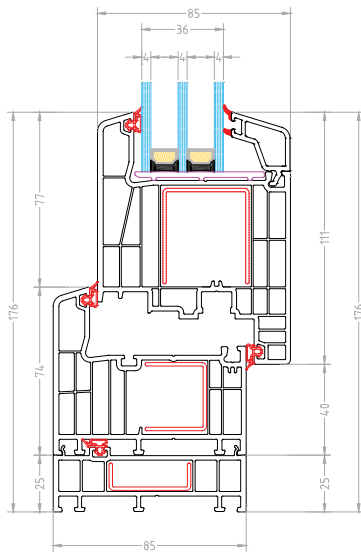


## DOOR SYSTEM

Application of frame extension 100mm

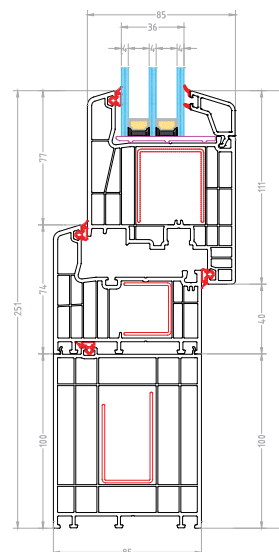


## DOOR SYSTEM

Application of 24mm door panel

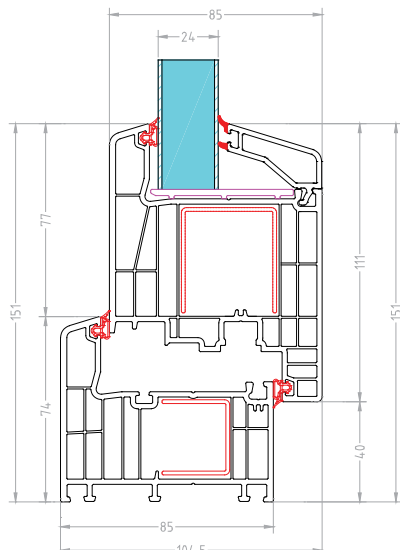


## DOOR SYSTEM

Application of 36mm door panel

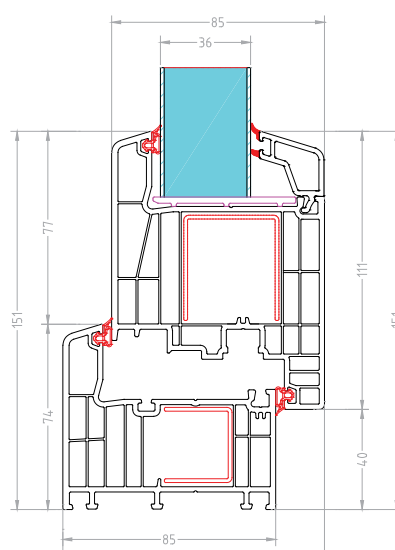


## DOOR SYSTEM

Application of door sash, treshold and drainboard

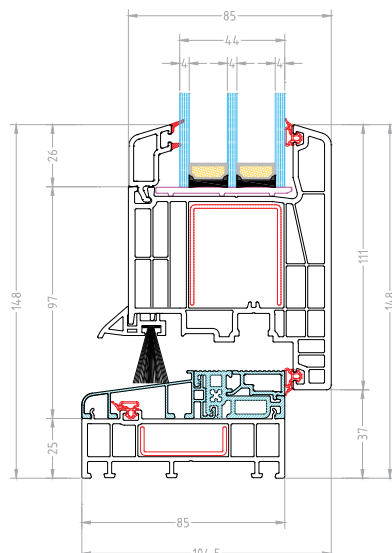


## DOOR SYSTEM

Application of connection molding

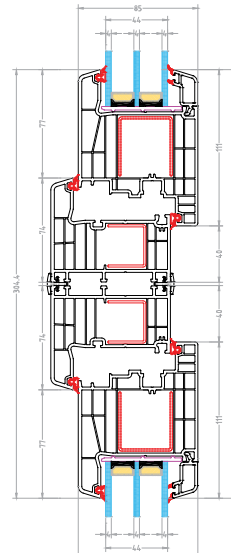


## WINDOW SYSTEM

Application of additional cornice part on the wall

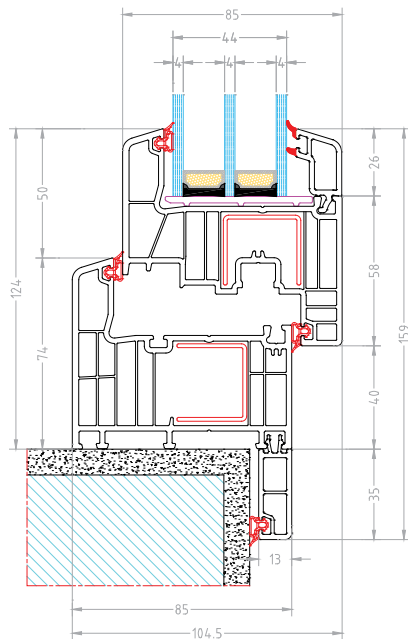


## WINDOW SYSTEM

Drainage view

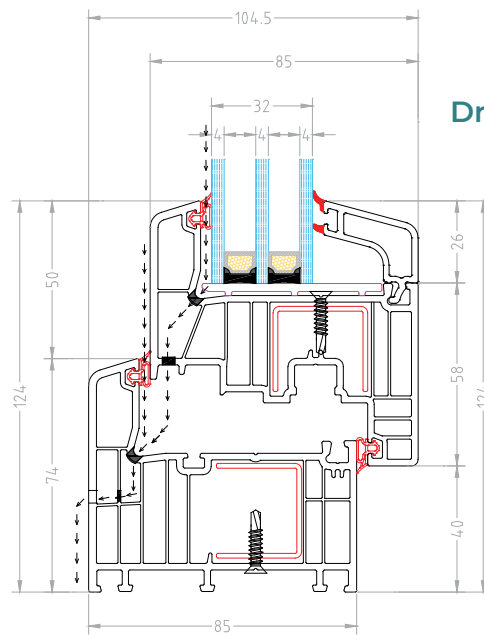

## WINDOW SYSTEM

Application of outside ALU window sill and inside PVC window sill

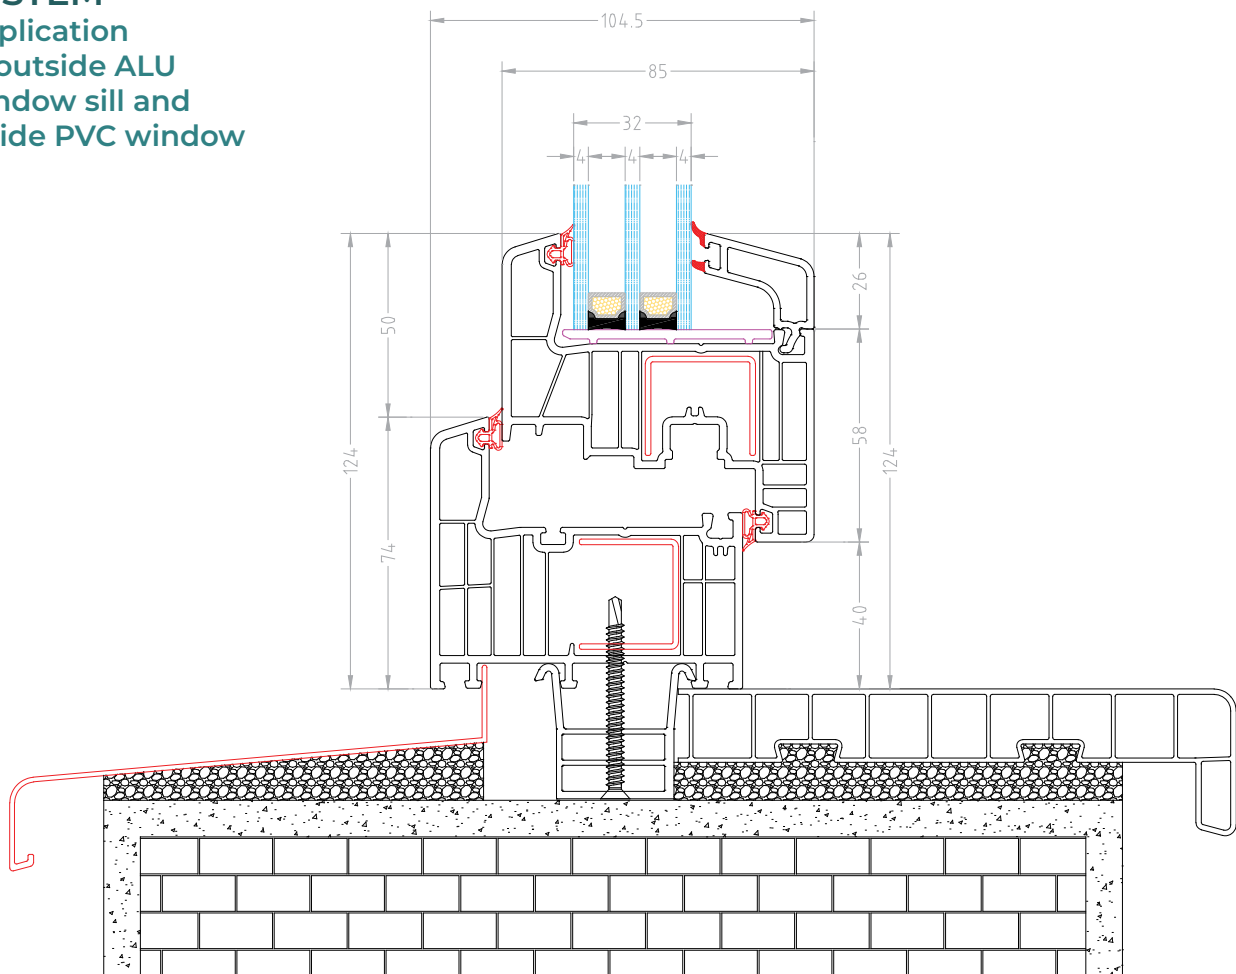



---

## Long Lifespan

With proper installation, uPVC profiles can last 20–40 years or more, maintaining their appearance and performance over time.



# 8500 NL

Designed with superior thermal insulation properties, making it an ideal choice for energy-efficient homes and buildings. The 120mm width allows for multiple chambers within the profile, reducing heat transfer and maintaining optimal indoor temperatures.



## Robust design

Featuring 120mm width technology, this system is engineered for superior thermal and sound insulation.



## 3 gaskets

Three levels of ventilation ensure excellent windproofing, optimal wind protection, and superior sound insulation.



## Triple glass

Available with double glass of 24mm, three-layer 36mm glass and triple 44mm glazing bead.



## 120mm width

Our 120mm width uPVC profile offers exceptional durability, energy efficiency, and a sleek design.



Quality and certified



## Standard colors of our uPVC profiles

All other colors can be made to order



White



Anthracite



Golden Oak



Dark Oak



Nussbaum



Jet Black



Mahogany

## Why to choose our products?

Our PVC window and door systems are manufactured using advanced technology and provide an excellent level of acoustic and thermal insulation, achieving the highest quality standards available.



Environment  
Friendly



Easy  
Installation



Cost  
Effective



Noise  
Reduction



Can be  
recycled



Less  
Maintenance



Fire  
Retardant



Long  
life



Thermal  
Insulation



Modern  
design



### Premium uPVC profiles

Created from high-quality raw materials



### Innovation

Enhanced durability and energy efficiency for construction needs




### Reliability

Our uPVC profiles are designed for unmatched reliability




Scan code and read more informations about this uPVC profile series.


**BF 1201**  
Frame profile  
*Frame with cornice*

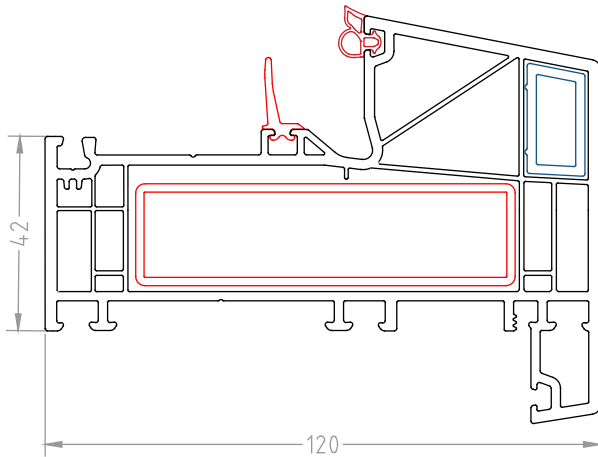


**BF 1202**  
Frame profile  
*Frame without cornice*

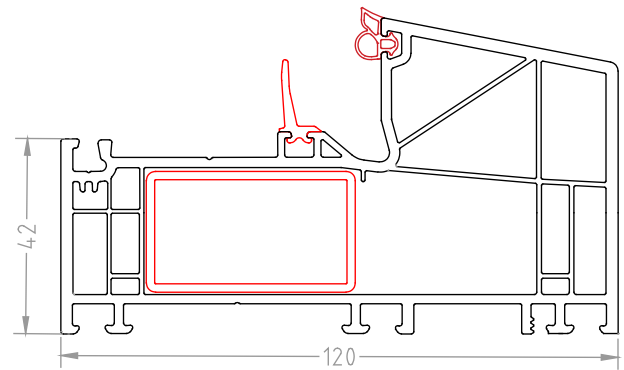


**BF 1203**  
Mullion (T-bar) profile

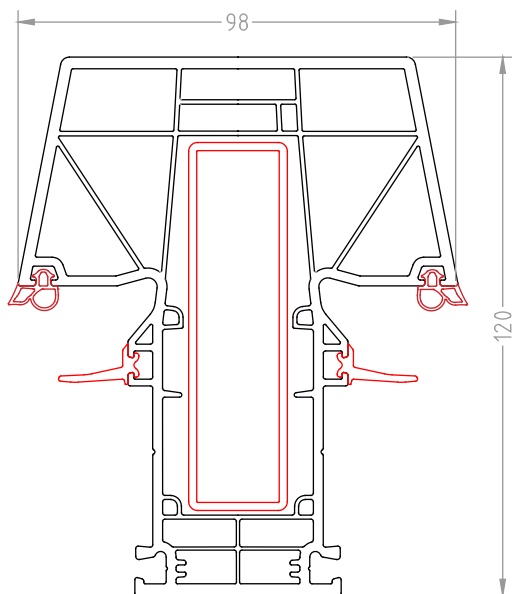


**BF 1204**  
False mullion profile

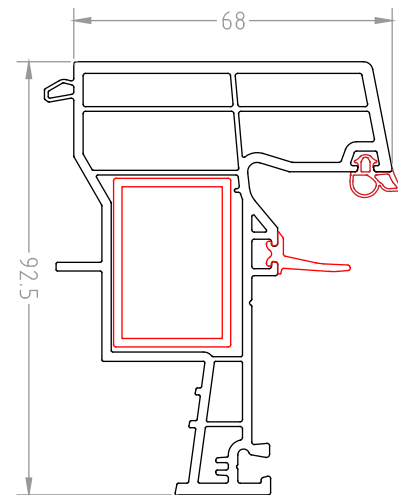


**BF 8583**  
In turn door sash profile

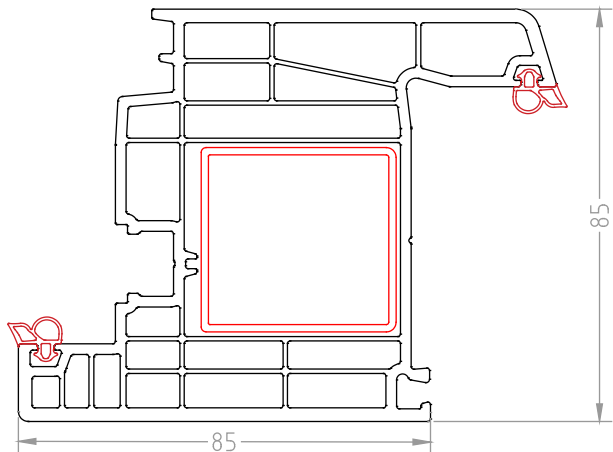


**BF 8584**  
Outward opening door sash profile

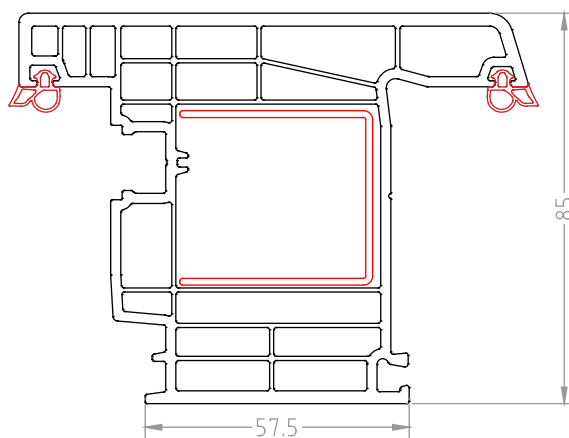


**BF 8582**  
Sash profile

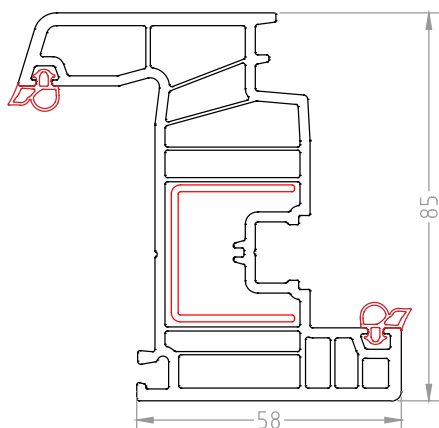


**BF 8586**  
False mullion profile

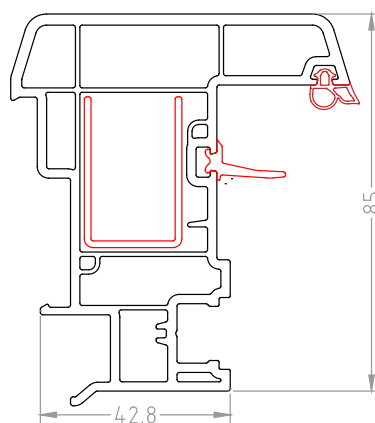


**BF 1203**  
Mullion (T-bar) profile

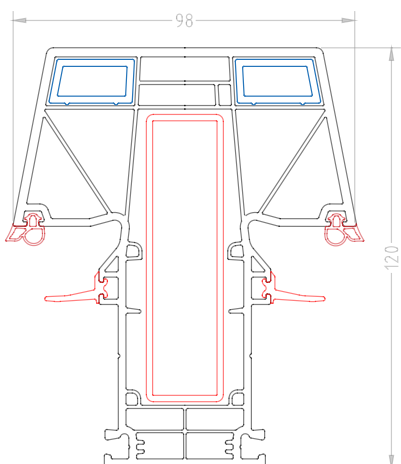


**BF 1201**  
Frame profile  
*Frame with cornice*

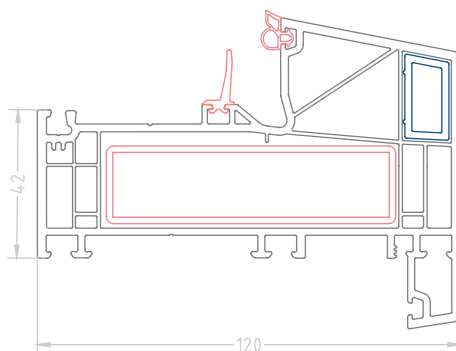


These two profiles can also include additional aluminum reinforcements when used in the construction of larger windows or doors.




**BF 8509**  
Double glazing bead  
24 mm

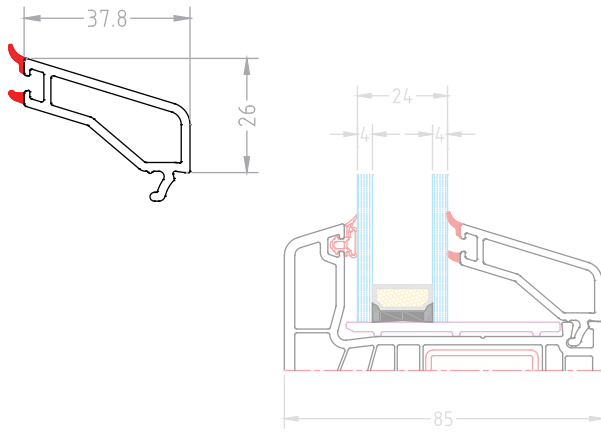


**BF 7609**  
Triple glazing bead  
32 mm

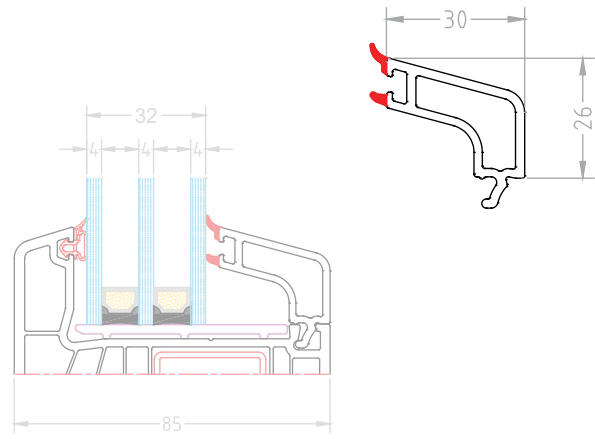


**BF 8508**  
Triple glazing bead  
36 mm

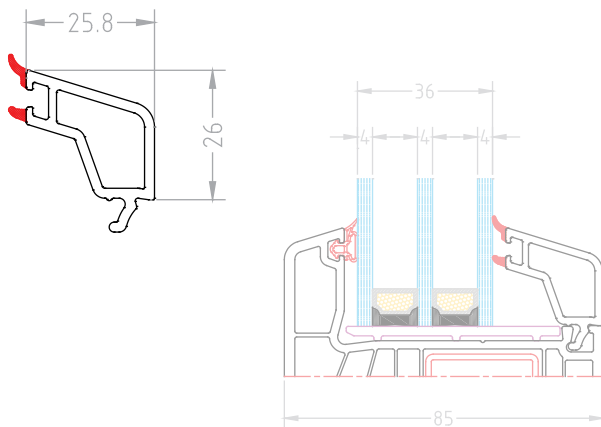

**BF 8510**  
Triple glazing bead  
44 mm

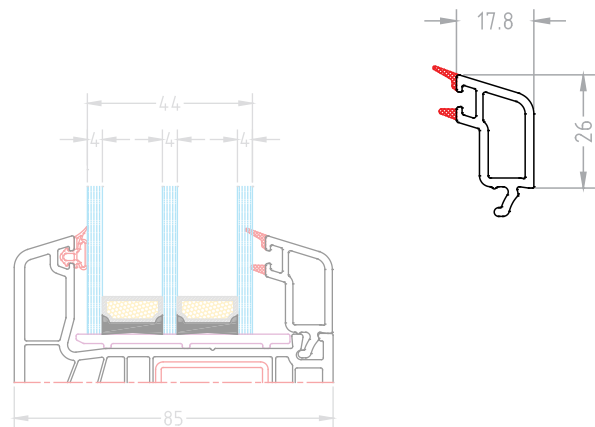

**BF 7054**  
Triple glazing bead  
52.50 mm

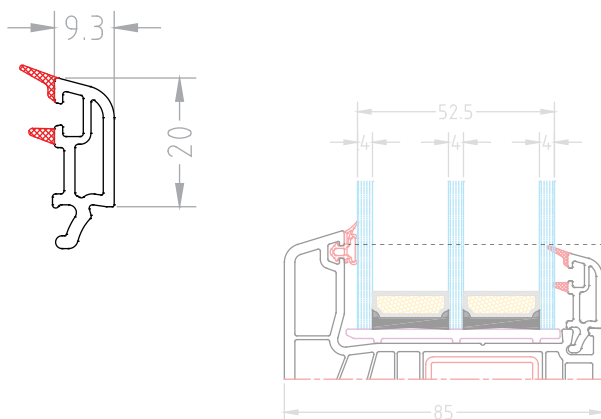

## Glazing Beads for uPVC Windows and Doors

Glazing beads are crucial components in uPVC windows and doors, ensuring the glass panes are securely held in place while providing a neat and finished appearance. These beads are typically made from the same uPVC material as the window or door frames, ensuring a seamless and cohesive look.


*Durability*  
*Low Maintenance*  
*Energy Efficiency*

# 8500 NL

120mm width profile

Additional profiles


**BF 7625**  
Profile extension  
76\*25mm




**BF 8589**  
False mullion cap




**OKBT 85**  
Mullion (T-bar) coupling 85




**BF 5025**  
Additional cornice  
part - Adaptor




**BF 8536**  
Window Drainboard



**BF 7208**  
Blind box extension



**BF 7202**  
Connecting molding



## Iron reinforcement

Can be used for:

**BF 1201** Frame Profile and  
**BF 1203** Mullion (T-bar) profile




**BF 425-12** (Thickness 1.2mm) **BF 425-15** (Thickness 1.5mm) **BF 425-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for:

**BF 1204** False mullion profile




**BF 423-12** (Thickness 1.2mm) **BF 423-15** (Thickness 1.5mm) **BF 423-20** (Thickness 2.0mm)

## Aluminium reinforcement

Can be used for:


**BF 1201** Frame Profile and  
**BF 1203** Mullion (T-bar) profile



**BF 424-12** (Thickness 1.2mm) **BF 424-15** (Thickness 1.5mm) **BF 424-20** (Thickness 2.0mm)

## Iron reinforcement


Can be used for: **BF 8503**,  
**BF 8504**, **BF 8523**, **BF 8583**  
and **BF 8584** Door sash

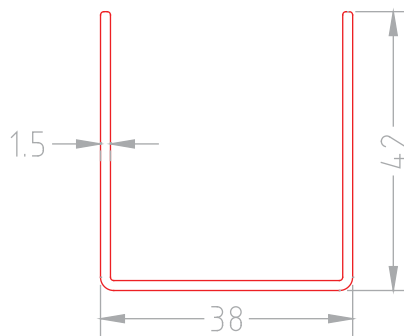

**BF 410-12** (Thickness 1.2mm) **BF 410-15** (Thickness 1.5mm) **BF 410-20** (Thickness 2.0mm)

## Iron reinforcement

**BF 8501**, **BF 8521** and **BF 8581**  
Frame, **BF 8502**, **BF 8522** and  
**BF 8582** Sash, and **BF 8545**  
Frame with cornice

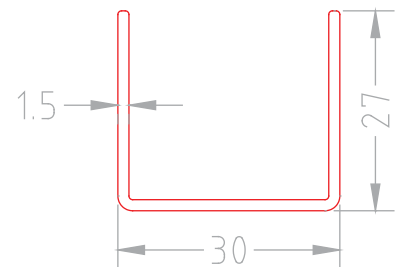

**BF 409-12** (Thickness 1.2mm) **BF 409-15** (Thickness 1.5mm) **BF 409-20** (Thickness 2.0mm)

## Iron reinforcement

Can be used for:

**BF 1202** Frame Profile



**BF 426-12** (Thickness 1.2mm) **BF 426-15** (Thickness 1.5mm) **BF 426-20** (Thickness 2.0mm)




## Steel reinforcement

Our uPVC profiles come with the option for steel reinforcement and a variety of multi-point locking systems places that make them among the safest and securest systems on the market.


## WINDOW SYSTEM

Application of frame and sash  
(without cornice)

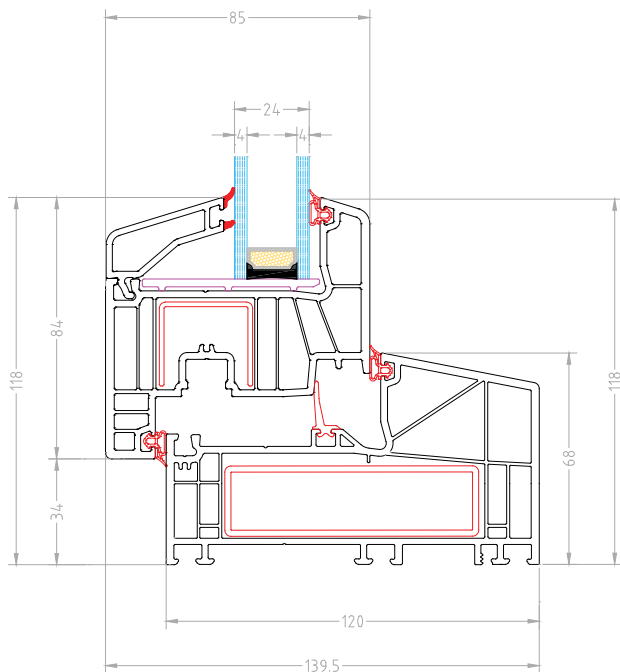


## WINDOW SYSTEM

Application of frame and sash  
(with cornice)

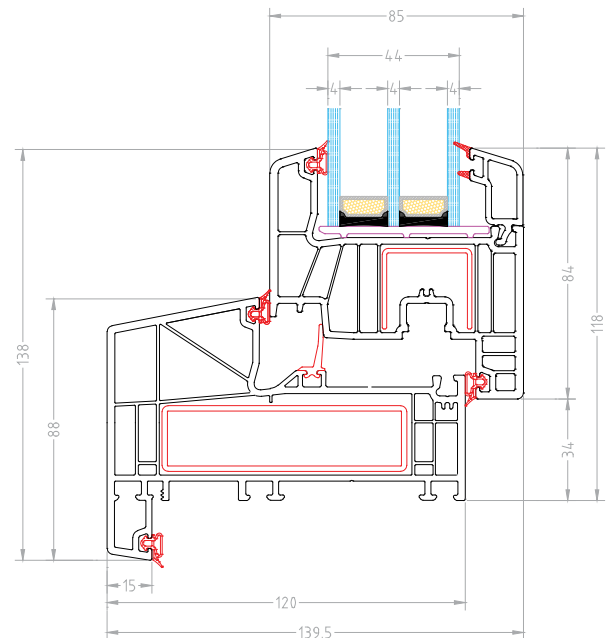


## DOOR SYSTEM

Application of frame  
(with cornice)

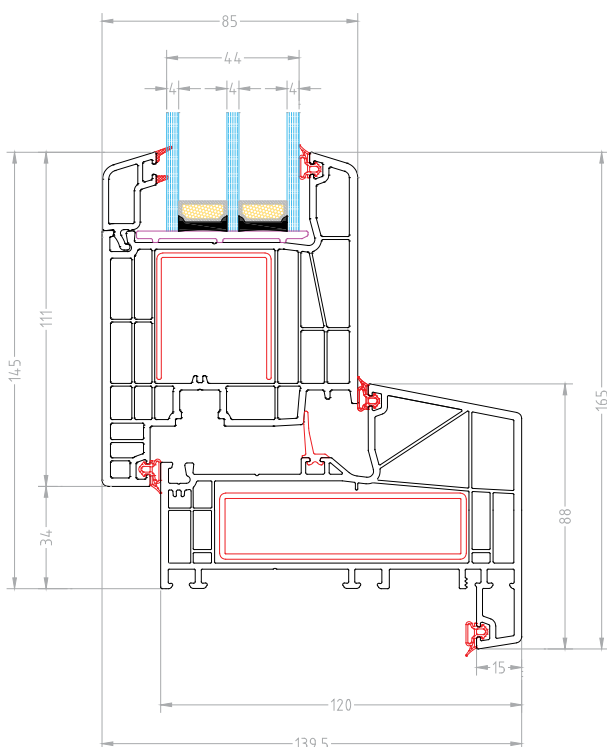


## DOOR SYSTEM

Application of frame  
(without cornice)

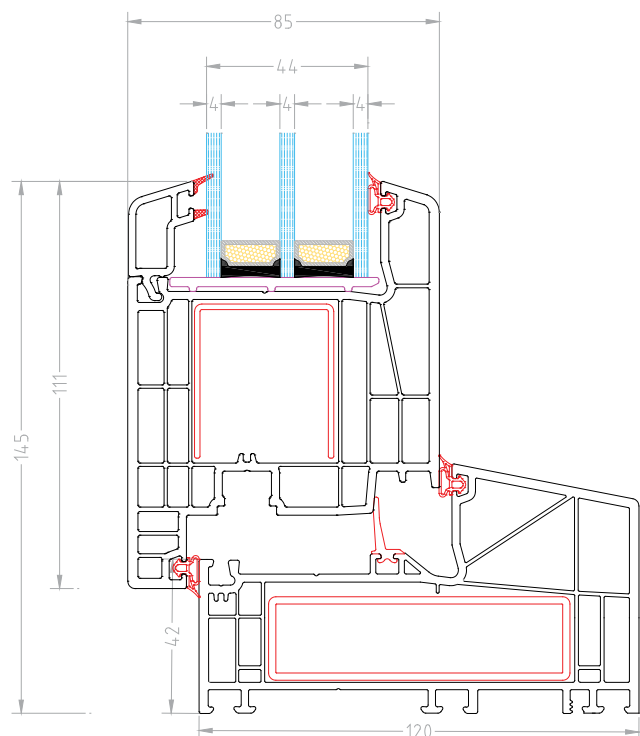


## NL SYSTEM

Application of Mullion (T-bar) and False mullion profile

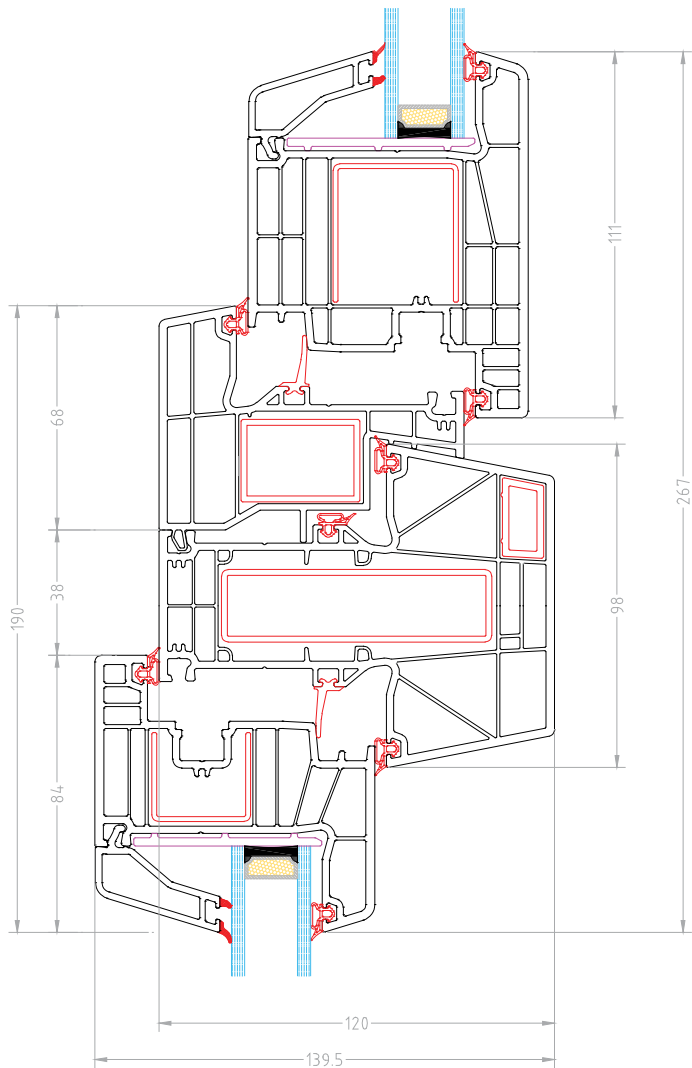


## DOOR SYSTEM

Application of false mullion profile

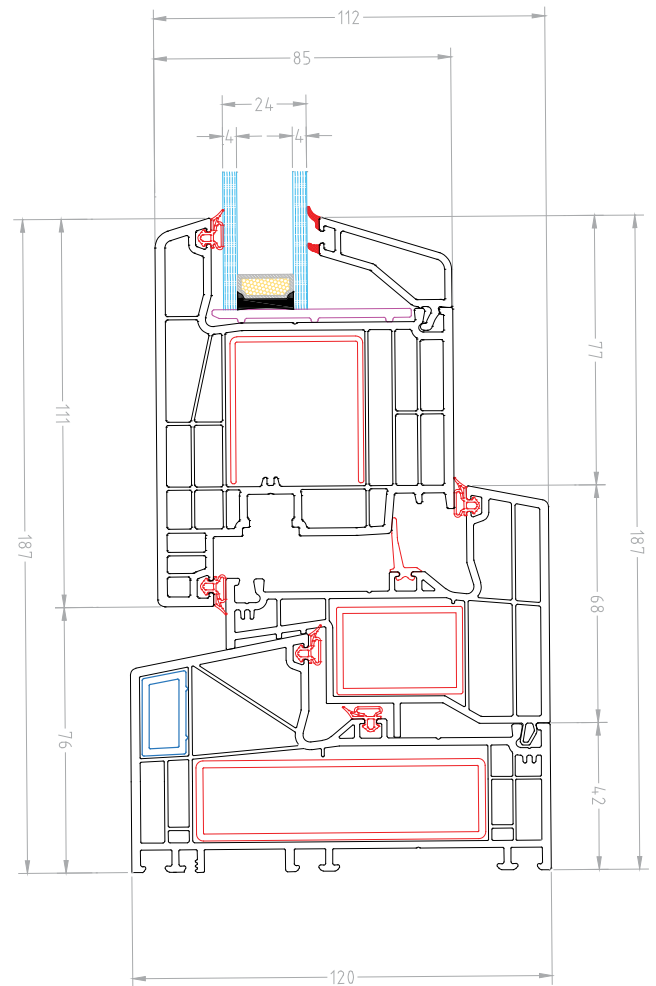

## WINDOW AND DOOR SYSTEM

Application of window and door profiles with NL 8500 series

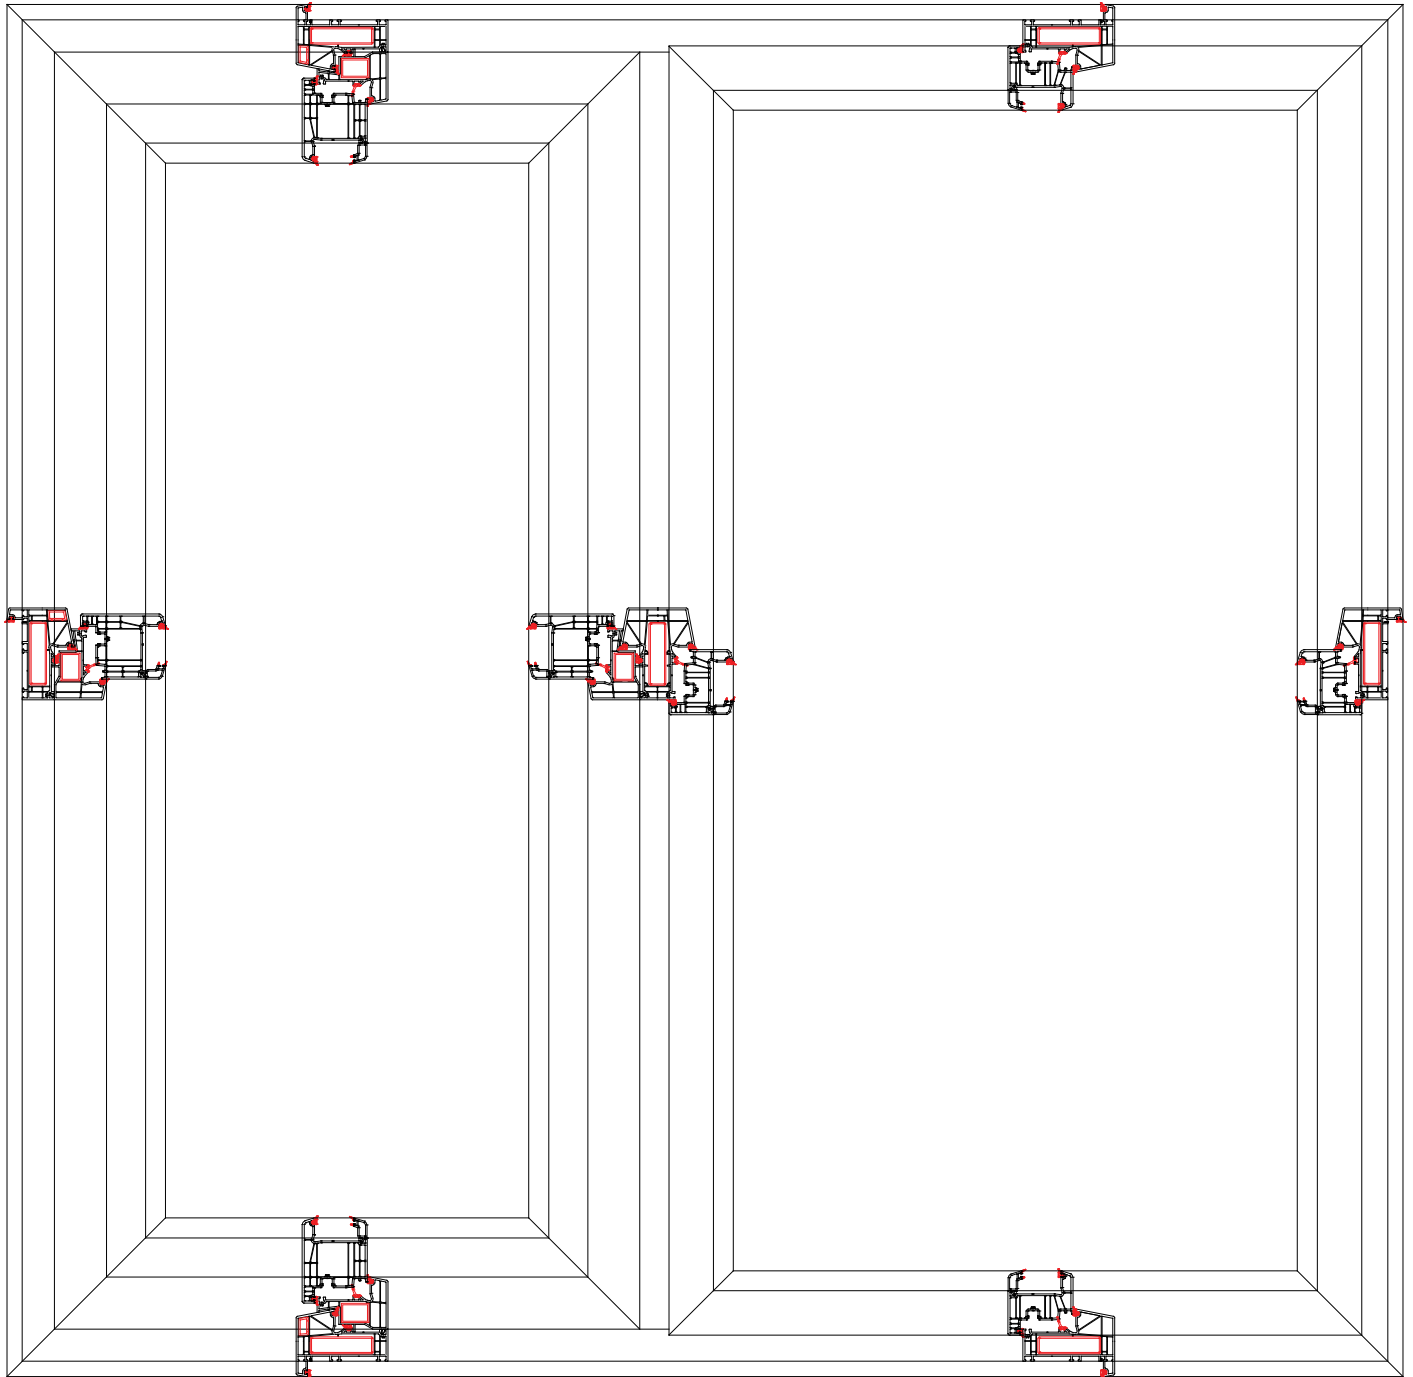




---

## Long Lifespan


With proper installation, uPVC profiles can last 20–40 years or more, maintaining their appearance and performance over time.

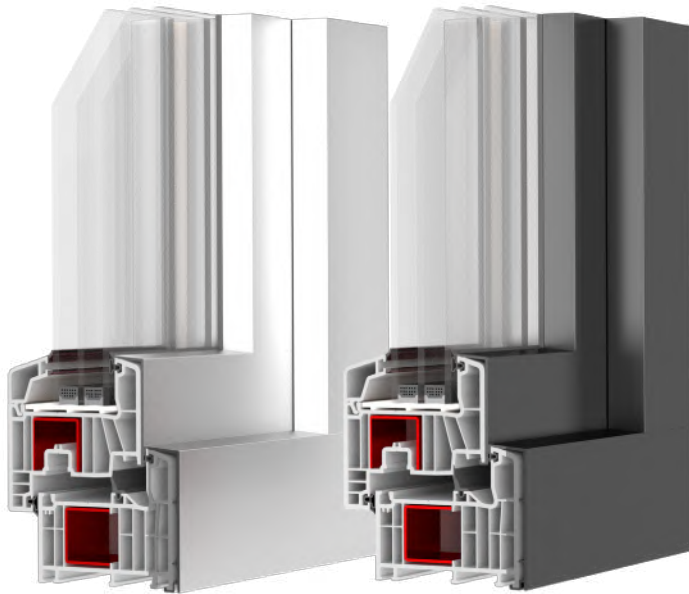

# 85 MD ALUCLIP


85 MD AluClip represents a PVC-U window system with an installation depth of 85 mm and an aluminium cover precision fitted to the outside of the window.

- Great sound insulation
- Lower heat transfer coefficient
- Burglar resistant material
- Modern and unique design
- Quality and durable
- Timeless elegance



Aluclips are specifically designed to fit standard uPVC window profiles. This means they often come with pre-aligned grooves, clips, or snap-fit mechanisms that match the dimensions and structure of uPVC frames.

Our Aluclip systems are designed for snap-on (click-in) installation, requiring little to no tools. This makes the process fast and user-friendly, even for non-professionals.



Available colors of Aluclips:

- ① **White Aluminium**
- ② **Anthracite**

Aluclips not only enhance the appearance of uPVC windows by giving them an aluminum finish but also add durability and weather resistance—making them a popular upgrade that's easy to apply.

## Why to choose our products?

Our PVC window and door systems are manufactured using advanced technology and provide an excellent level of acoustic and thermal insulation, achieving the highest quality standards available.

- |                                                                                                               |                                                                                                             |                                                                                                          |                                                                                                              |                                                                                                            |
|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| <br>Environment<br>Friendly | <br>Easy<br>Installation | <br>Cost<br>Effective | <br>Noise<br>Reduction    | <br>Can be<br>recycled |
| <br>Less<br>Maintenance     | <br>Fire<br>Retardant    | <br>Long<br>life      | <br>Thermal<br>Insulation | <br>Modern<br>design   |



### Premium uPVC profiles

Created from high-quality raw materials



### Innovation

Enhanced durability and energy efficiency for construction needs





### Reliability

Our uPVC profiles are designed for unmatched reliability





Scan code and read more informations about this uPVC profile series.



**Aluclip for:**  
8501 and 8581 Frame profile

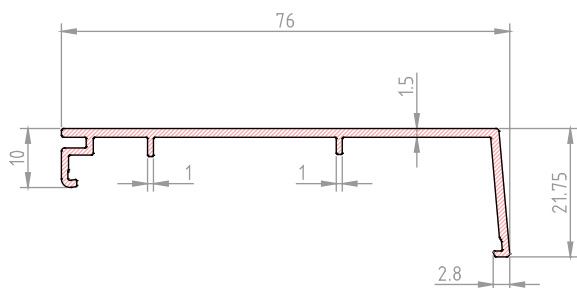



**Aluclip for:**  
8502 and 8582 Sash profile

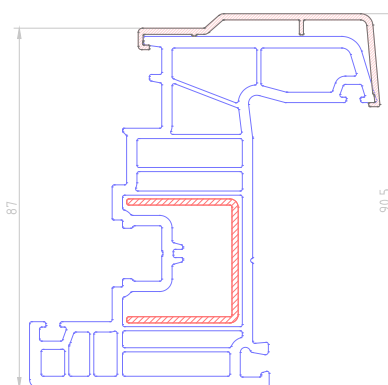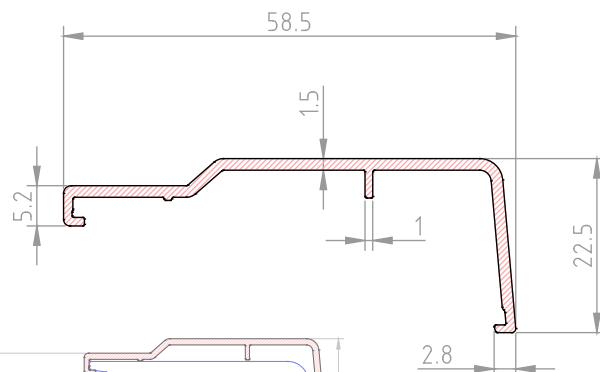


**Aluclip for:**  
8502 and 8582 Sash profile

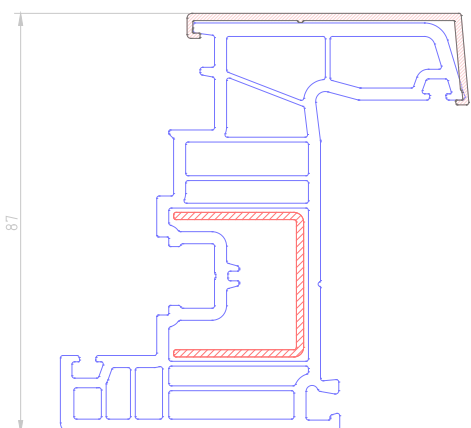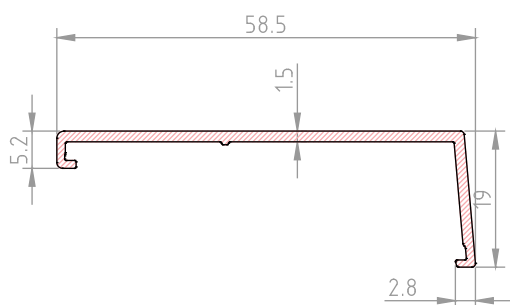


**Aluclip for:**  
8503 and 8583 Door sash profile

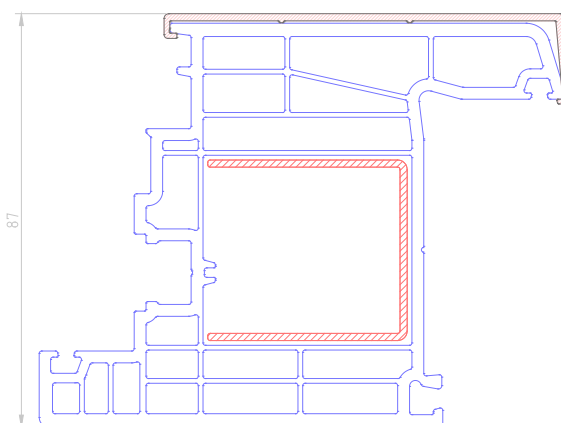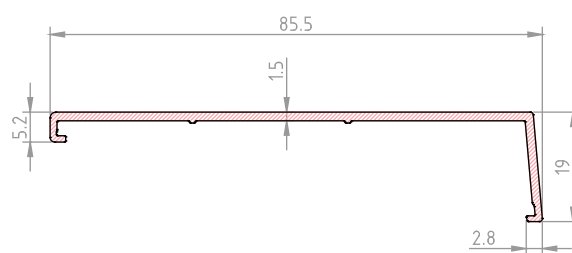


## Aluclip for: 8505 and 8585 Mullion (T-bar) profile

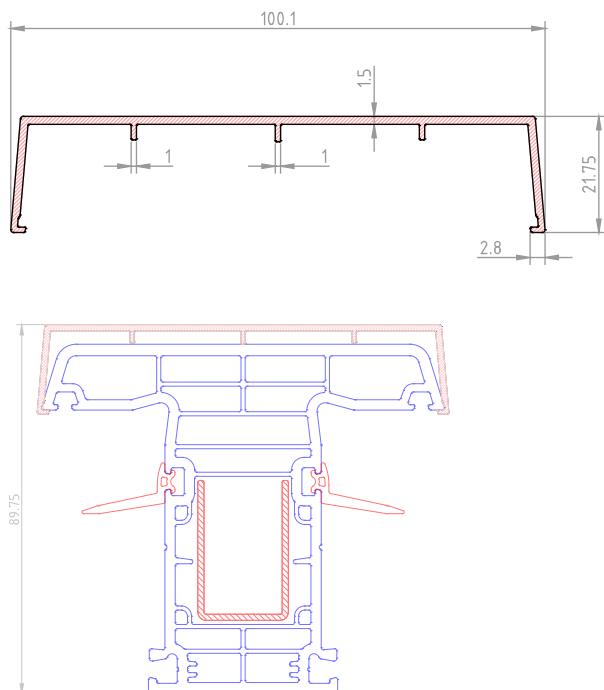

## Aluclip for: 8502 Sash profile + 8506 False mullion 8582 Sash profile + 8586 False mullion

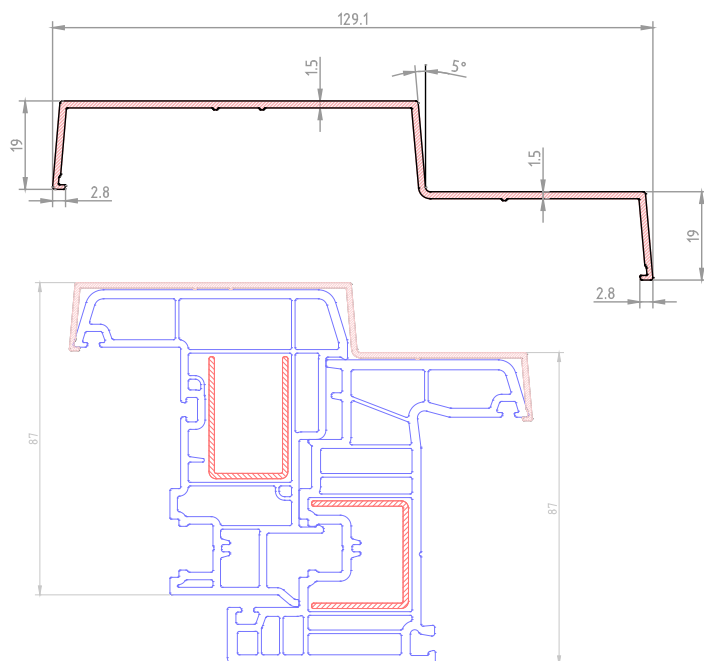

## 8503 Door sash profile + 8506 False mullion profile 8583 Door sash profile + 8586 False mullion profile

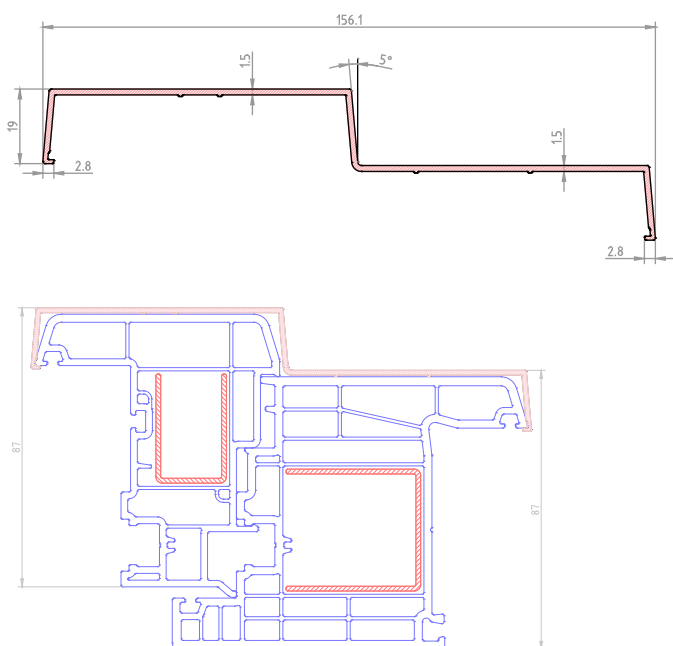



## Eco-Friendly Option

uPVC is 100% recyclable, and many manufacturers now use recycled materials in their profiles, contributing to sustainable building practices.

ECO friendly



# 7600 Forest

Our 76mm system with 6-chamber uPVC profiles is crafted for clients seeking a blend of modern elegance, practicality, and functionality. It ensures exceptional comfort and greatly enhances the quality of life for its users.



## 6 chambers

Featuring six-chamber technology, this system is engineered for superior thermal and sound insulation.



## 3 gaskets

Three levels of ventilation ensure excellent windproofing, optimal wind protection, and superior sound insulation.



## Triple glass

Available with double glass of 24mm and 28mm, three-layer 36mm glass and triple 44mm glazing bead.



## 76mm width

Our 76mm width uPVC profile offers exceptional durability, energy efficiency, and a sleek design.




Quality and certified



## Standard colors of our uPVC profiles

All other colors can be made to order



White



Anthracite



Golden Oak



Dark Oak



Nussbaum



Jet Black



Mahogany

## Why to choose our products?

Our PVC window and door systems are manufactured using advanced technology and provide an excellent level of acoustic and thermal insulation, achieving the highest quality standards available.



Environment  
Friendly



Easy  
Installation



Cost  
Effective



Noise  
Reduction



Can be  
recycled



Less  
Maintenance



Fire  
Retardant



Long  
life



Thermal  
Insulation



Modern  
design



### Premium uPVC profiles

Created from high-quality raw materials



### Innovation

Enhanced durability and energy efficiency for construction needs




### Reliability

Our uPVC profiles are designed for unmatched reliability




Scan code and read more informations about this uPVC profile series.


**BF 7601**  
Frame profile  
(MD)

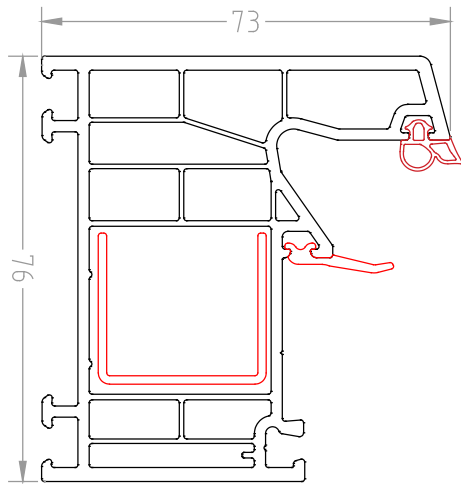


**BF 7611**  
Frame profile  
(AD)

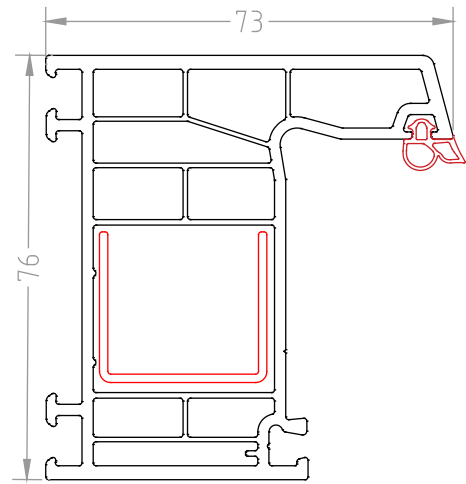


**BF 7602**  
Window sash profile

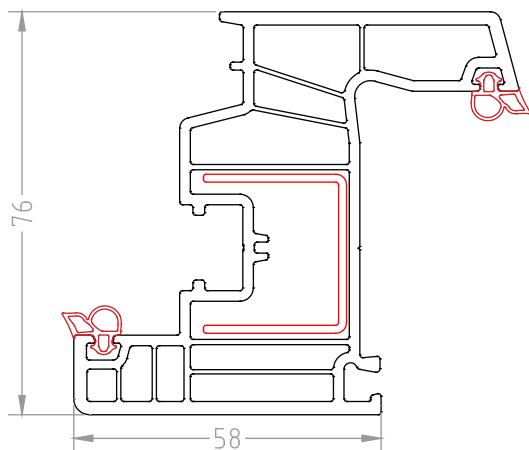


**BF 7603**  
In turn door sash profile

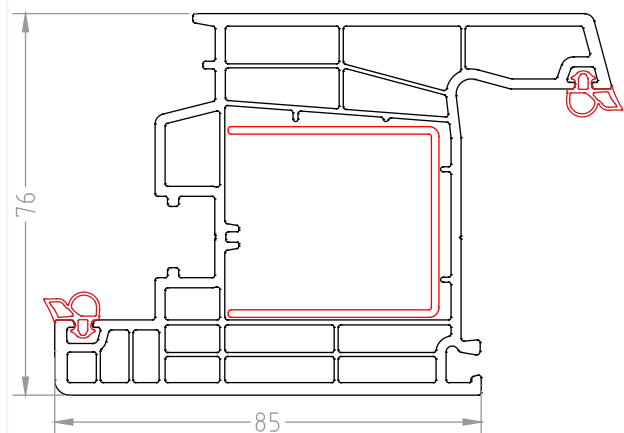


**BF 7604**  
Outward opening door sash profile

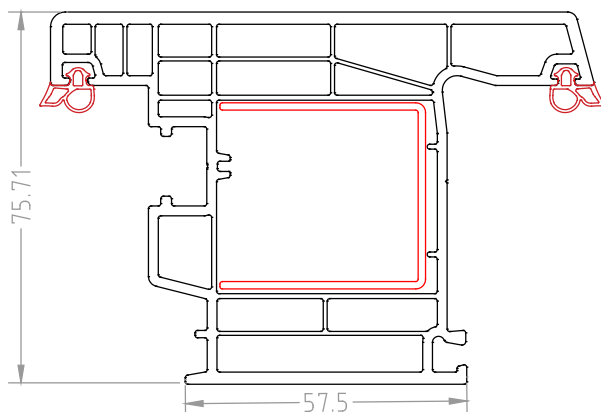


**BF 7605**  
Mullion (T-bar) profile  
(MD)

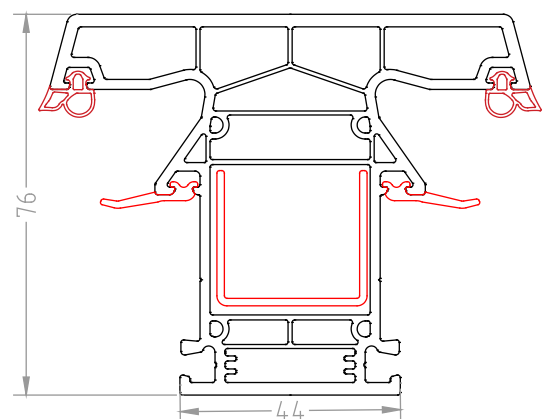


**BF 7612**  
Frame profile with cornice

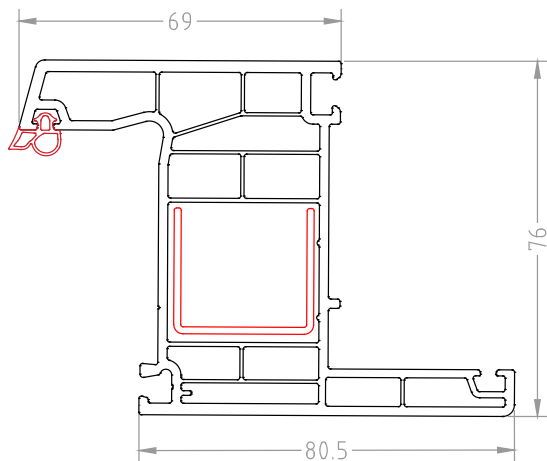


**BF 7615**  
Mullion (T-bar) profile  
(AD)

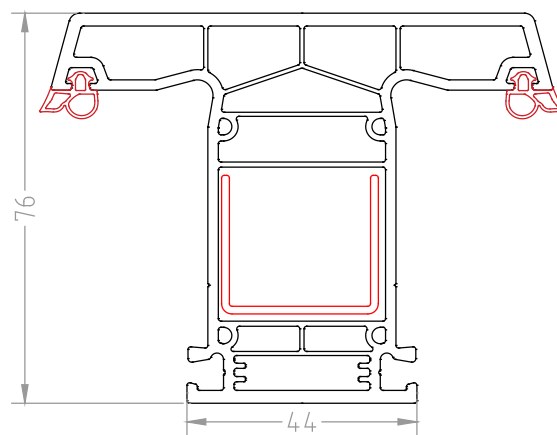


**BF 7606**  
False mullion profile  
(MD)

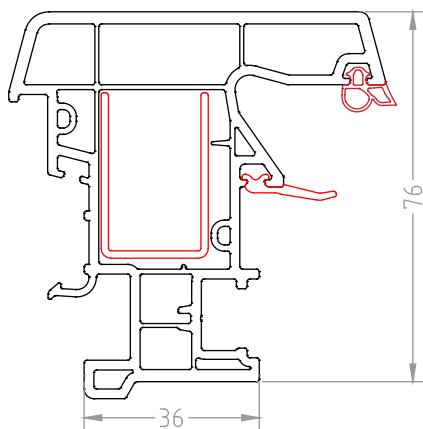


**BF 7616**  
False mullion profile  
(AD)

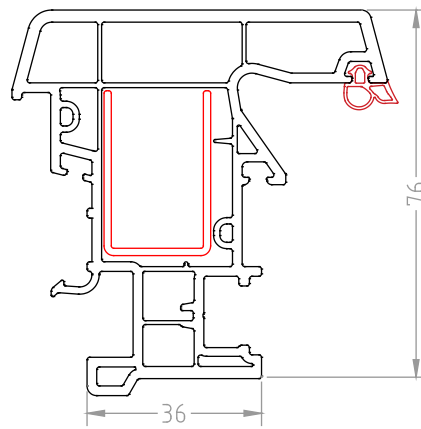


**BF 85-76**  
85-76 Combination frame

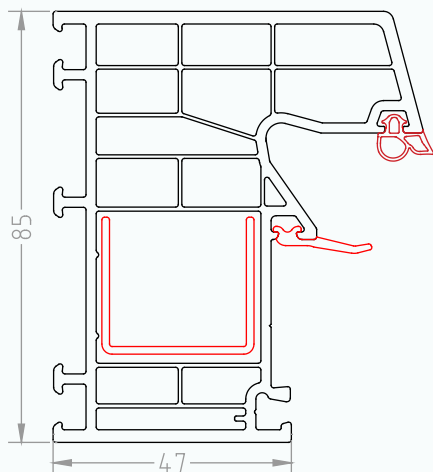


**BF 76-84**  
Mullion (T-bar) profile combination

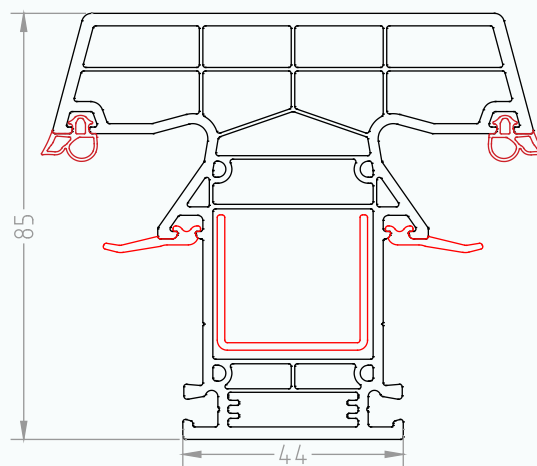


**BF 7609**  
Double glazing bead  
24 mm

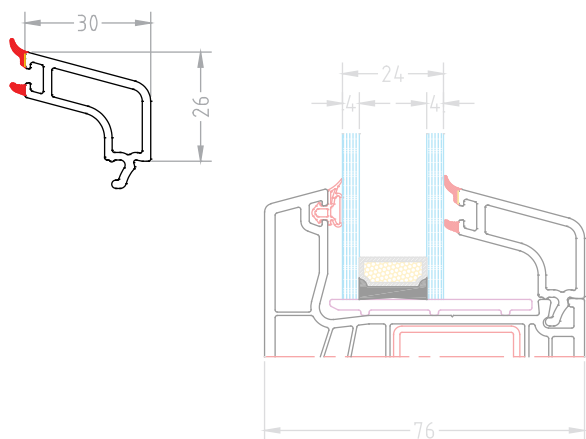


**BF 8508**  
Double glazing bead  
28 mm

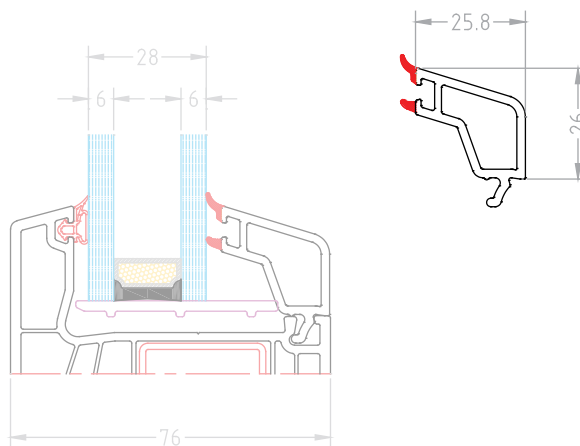

**BF 8510**  
Triple glazing bead  
36 mm

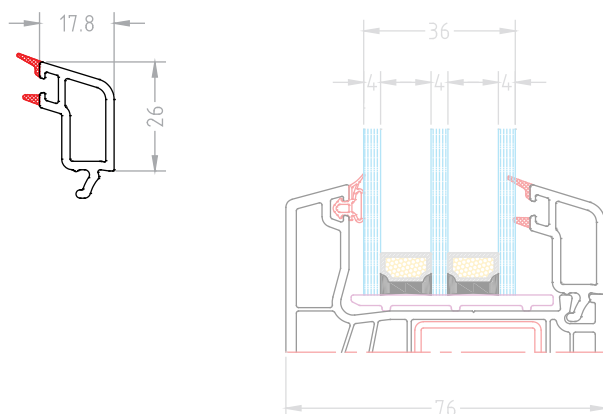

**BF 7054**  
Triple glazing bead  
44 mm

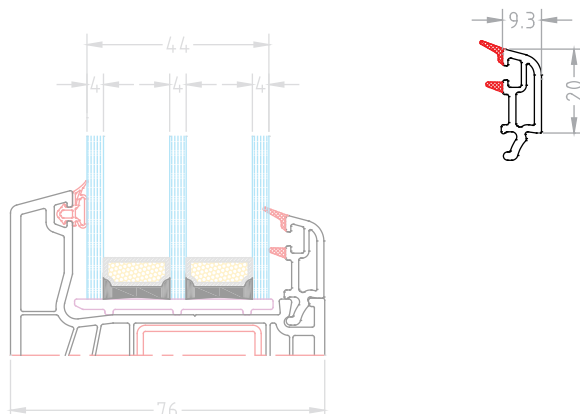


## Glazing Beads for uPVC Windows and Doors


Glazing beads are crucial components in uPVC windows and doors, ensuring the glass panes are securely held in place while providing a neat and finished appearance. These beads are typically made from the same uPVC material as the window or door frames, ensuring a seamless and cohesive look.

*Durability*  
*Low Maintenance*  
*Energy Efficiency*


**BF 7610**  
Profile extension  
76\*100mm

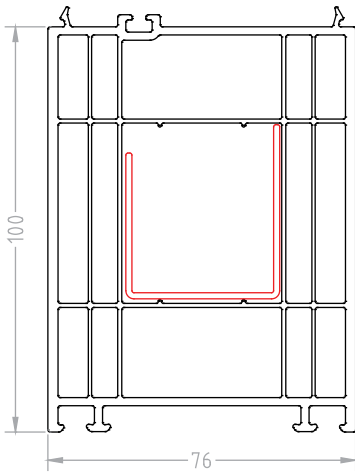


**BF 7625**  
Profile extension  
76\*25mm




**BF 7617**  
Treshold




**BF 8535**  
Connecting pillar




**BF 5025**  
Additional cornice  
part - Adaptor



**BF 8536**  
Window Drainboard



**BF 7208**  
Blind box extension




**BF 7618**  
Treshold cap 76




**BF 7619**  
False mullion cap 76



**BF 7202**  
Connecting molding



**OB 0076**  
Mullion (T-bar) coupling 76




**OB 0077**  
Mullion (T-bar) coupling 76



### Iron reinforcement

Can be used for:

**BF 7601** Frame profile  
**BF 7611** Frame profile  
**BF 7602** Sash profile  
**BF 7612** Cornice frame profile,  
**BF 7605** and **BF 7615** Mullion  
(T-bar) profile, **BF 85-76**  
Frame combination and  
**BF 76-84** Mullion (T-Bar)  
combination

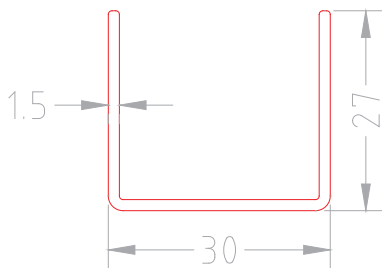


**BF 409-12** (Thickness 1.2mm) **BF 409-15** (Thickness 1.5mm) **BF 409-20** (Thickness 2.0mm)

### Iron reinforcement

Can be used for: **BF 7603**

Door sash and **BF 7604**  
Outward door sash

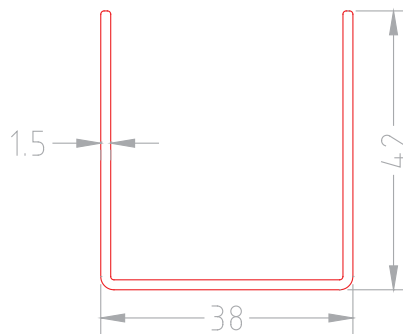


**BF 410-12** (Thickness 1.2mm) **BF 410-15** (Thickness 1.5mm) **BF 410-20** (Thickness 2.0mm)

### Iron reinforcement

Can be used for:

**BF 7616** False mullion profile




**BF 411-12** (Thickness 1.2mm) **BF 411-15** (Thickness 1.5mm) **BF 411-20** (Thickness 2.0mm)

### Iron reinforcement

Can be used for:

**BF 7610** Profile extension  
100mm

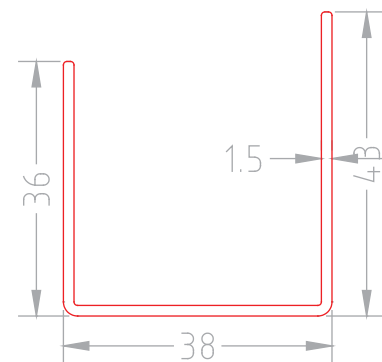


**BF 412-12** (Thickness 1.2mm) **BF 412-15** (Thickness 1.5mm) **BF 412-20** (Thickness 2.0mm)

### Iron reinforcement

Can be used for:

**BF 7625** Profile extension  
25mm




**BF 408-12** (Thickness 1.2mm) **BF 408-15** (Thickness 1.5mm) **BF 408-20** (Thickness 2.0mm)

### Iron reinforcement

Can be used for:

**BF 7601** and **BF 7611** Frame,  
**BF 7602** Sash, **BF 7612**  
Cornice frame profile,  
**BF 7605** and **BF 7615** Mullion  
(T-bar) profile, **BF 85-76**  
Frame combination and  
**BF 76-84** Mullion (T-Bar)  
combination

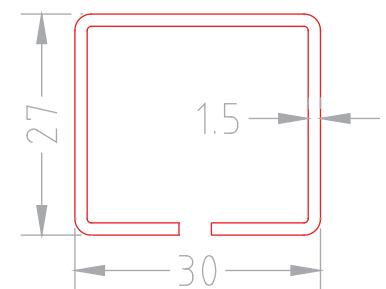


### Squared reinforcement

**BF 413-12** (Thickness 1.2mm) **BF 413-15** (Thickness 1.5mm) **BF 413-20** (Thickness 2.0mm)


## DOOR SYSTEM

Application  
of frame and  
door sash

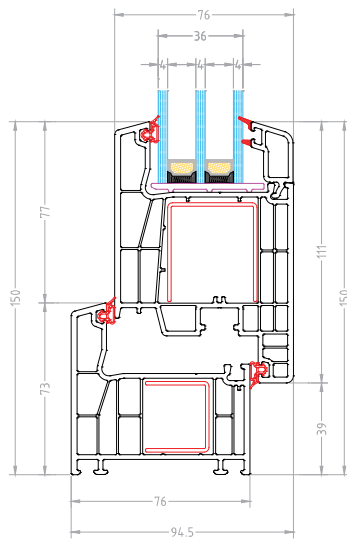


## WINDOW SYSTEM

Application  
of frame and  
window sash

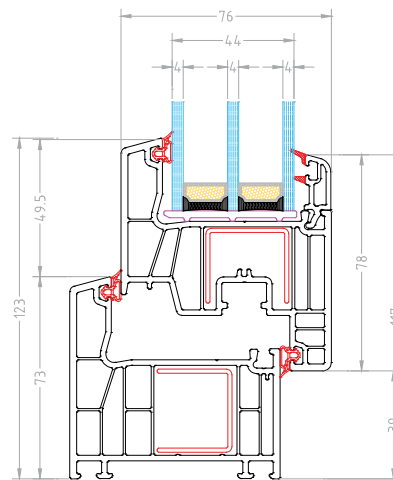


## DOOR SYSTEM

Application  
of frame and  
outward  
opening  
door  
sash

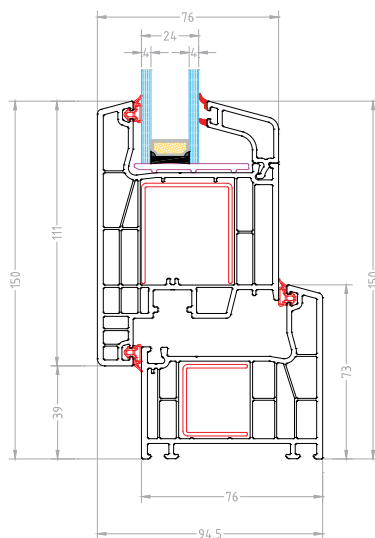


## WINDOW SYSTEM

Application  
of sash and  
false mullion  
profile

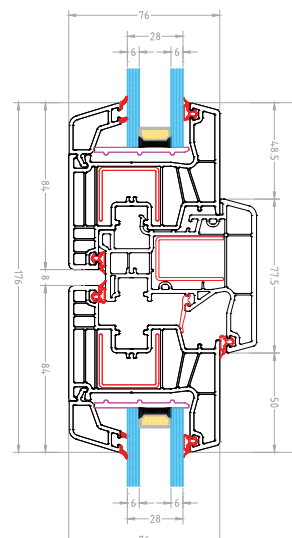


## WINDOW SYSTEM

Application  
of sash and  
Mullion (T-bar)  
profile

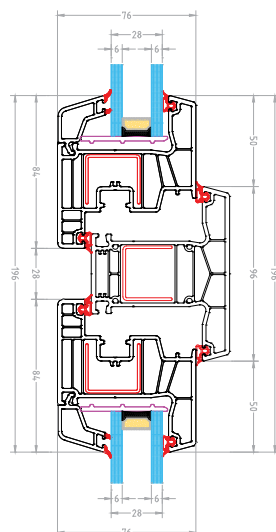


## WINDOW SYSTEM

Application  
of corner profile

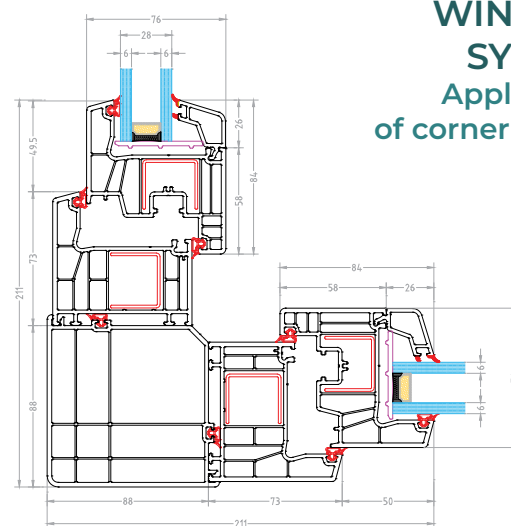


## DOOR SYSTEM

Application of frame extension 25mm

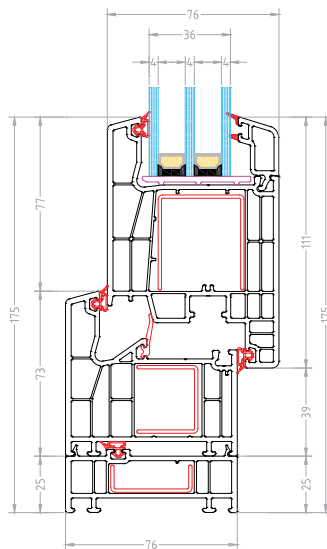


## DOOR SYSTEM

Application of frame extension 100mm

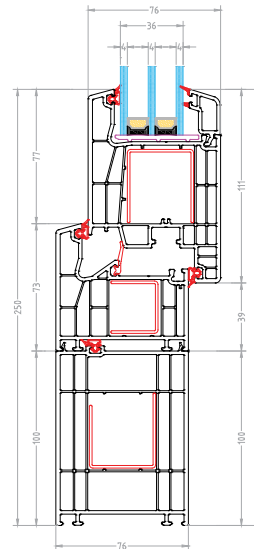


## DOOR SYSTEM

Application of 24mm door panel

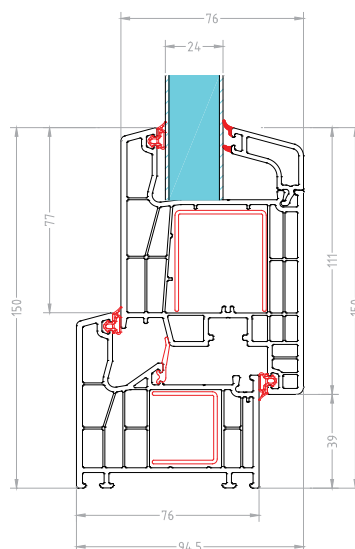


## DOOR SYSTEM

Application of 36mm door panel

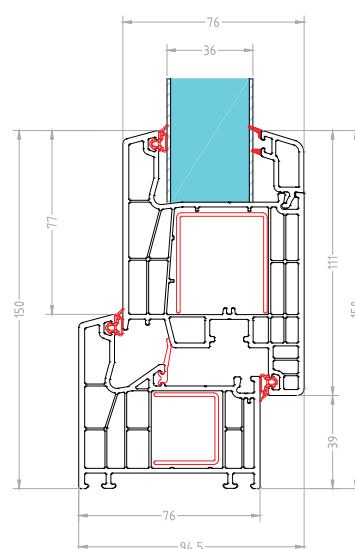


## WINDOW SYSTEM

Application of cornice frame profile

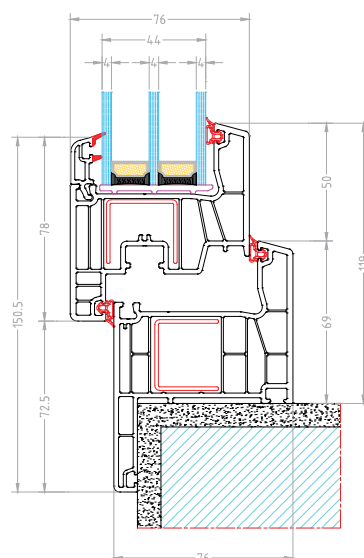


## WINDOW SYSTEM

Application of connection molding

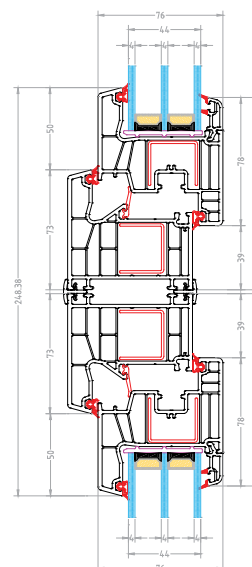


## WINDOW SYSTEM

Application of additional cornice part on the wall  
Used 85-76 Combination frame

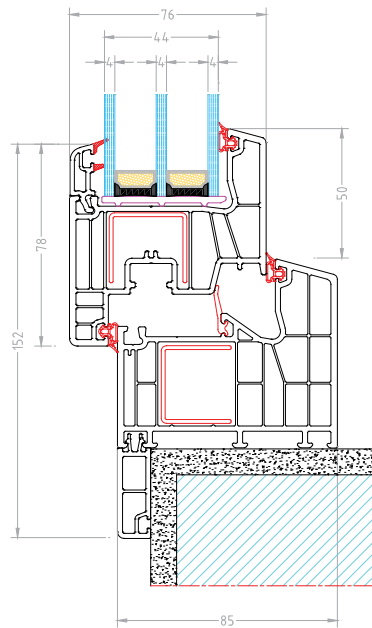


## WINDOW SYSTEM

Drainage view

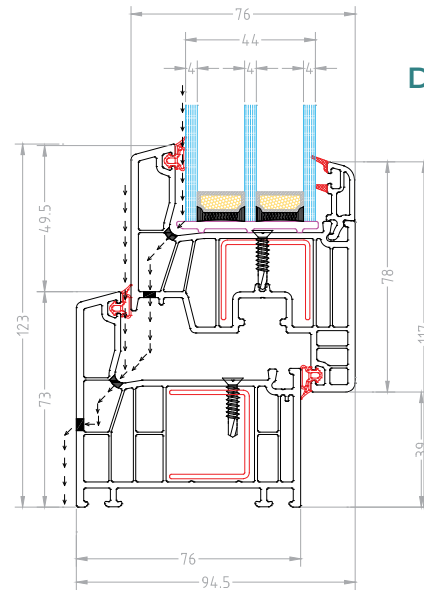

## WINDOW SYSTEM

Application of outside ALU window sill and inside PVC window sill

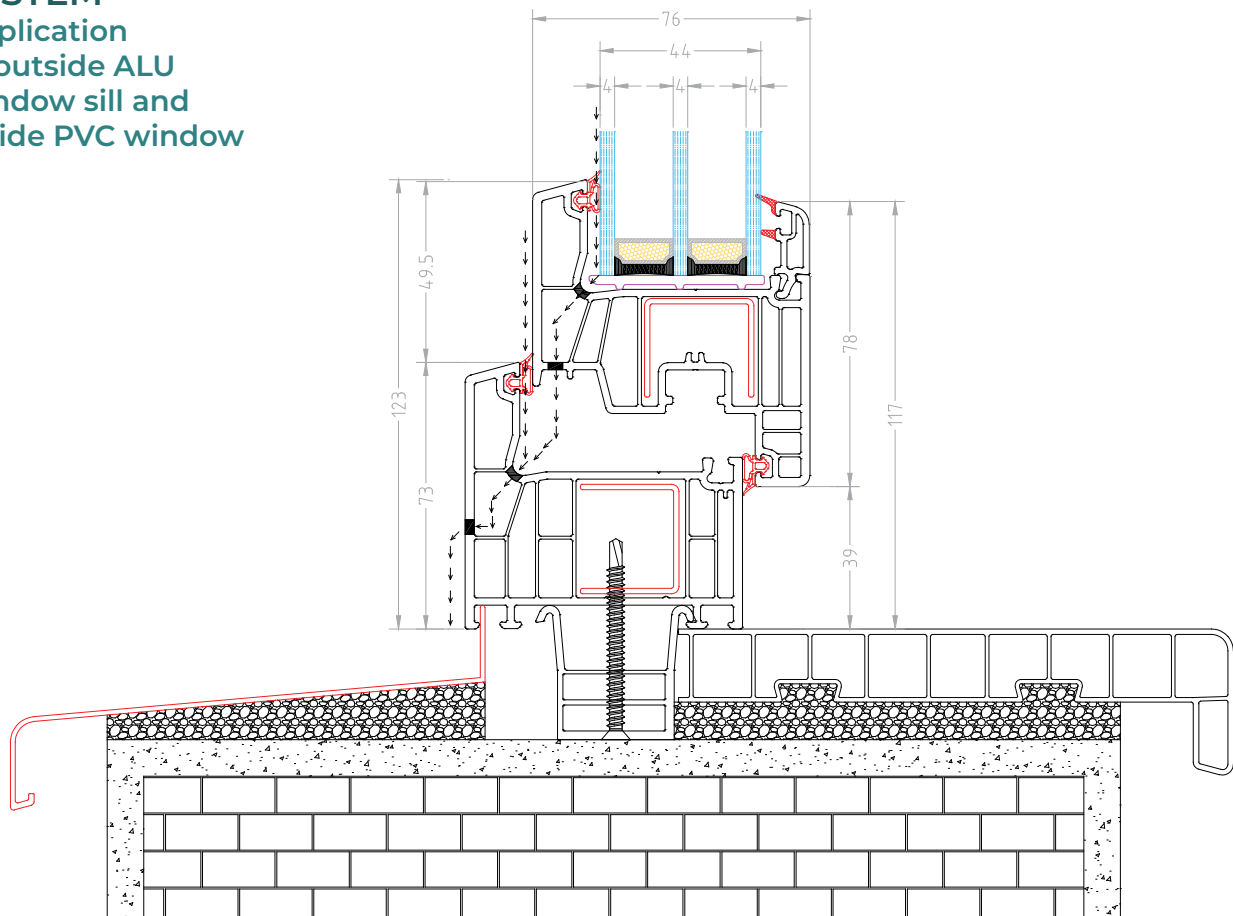



## Fire Retardant

uPVC is self-extinguishing and does not support combustion, making it a safer choice in case of fire compared to traditional materials.



# 7000 series

The A-Class 7000 system is designed for clients who desire a fusion of modern elegance, practicality, and functionality. It guarantees the utmost comfort and significantly enhances the quality of life for all users.



## 5 chambers

Featuring five-chamber technology, this system is engineered for superior thermal and sound insulation.



## 2 gaskets

Two gaskets ensure excellent windproofing, optimal wind protection, and superior sound insulation.



## Triple glass

Available with single glass of 4mm, two-layer 20mm and 24mm glass and triple 30mm glass.



## 70mm width

Our 70mm width uPVC profile offers exceptional durability, energy efficiency, and a sleek design.



Quality and certified




## Standard colors of our uPVC profiles

All other colors can be made to order



White



Anthracite



Golden Oak



Dark Oak



Nussbaum



Jet Black



Mahogany

## Why to choose our products?

Our PVC window and door systems are manufactured using advanced technology and provide an excellent level of acoustic and thermal insulation, achieving the highest quality standards available.



Environment  
Friendly



Easy  
Installation



Cost  
Effective



Noise  
Reduction



Can be  
recycled



Less  
Maintenance



Fire  
Retardant



Long  
life



Thermal  
Insulation



Modern  
design



### Premium uPVC profiles

Created from high-quality raw materials



### Innovation

Enhanced durability and energy efficiency for construction needs




### Reliability

Our uPVC profiles are designed for unmatched reliability




Scan code and read more informations about this uPVC profile series.


**BF 7001**  
Frame profile

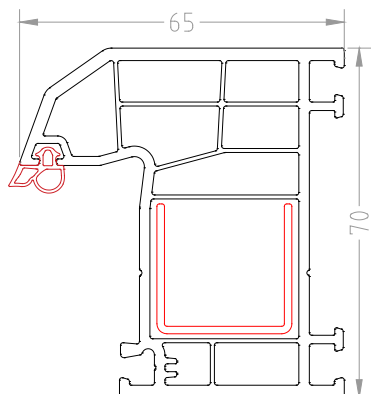


**BF 7011**  
Sash profile

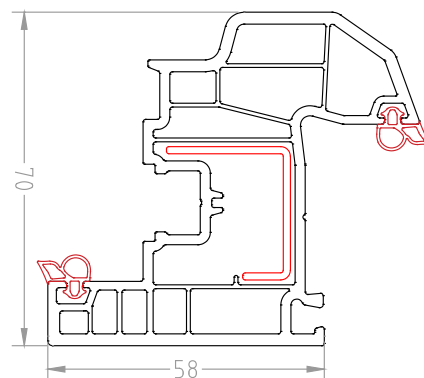


**BF 7021**  
Mullion (T-bar) profile

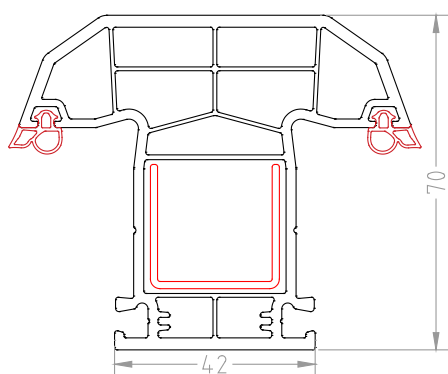


**BF 6031**  
False mullion profile

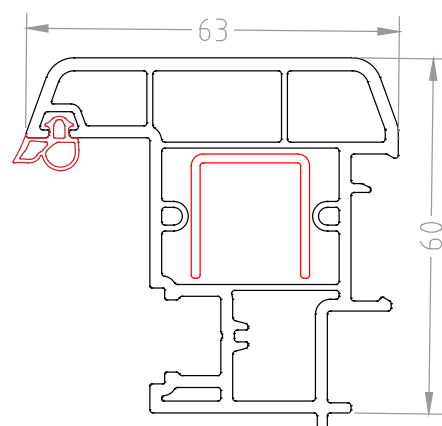


**BF 7033**  
In turn door sash profile

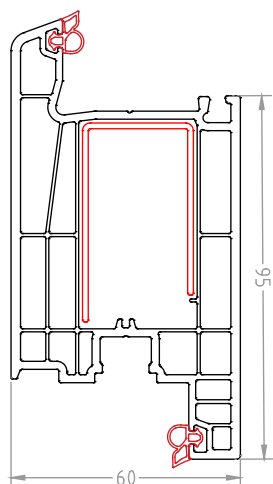


**BF 6041**  
In turn door sash profile

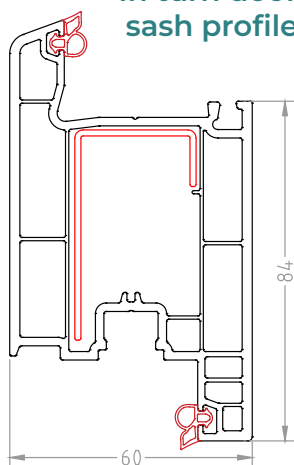


**BF 6051**  
Outward opening door sash profile

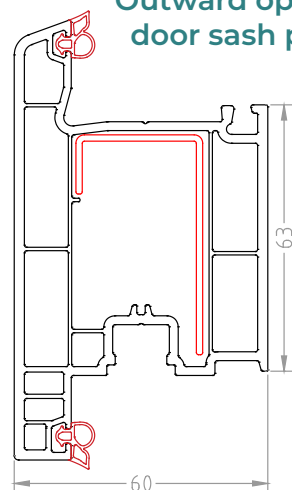


**BF 7053**  
Single glazing bead  
4 mm

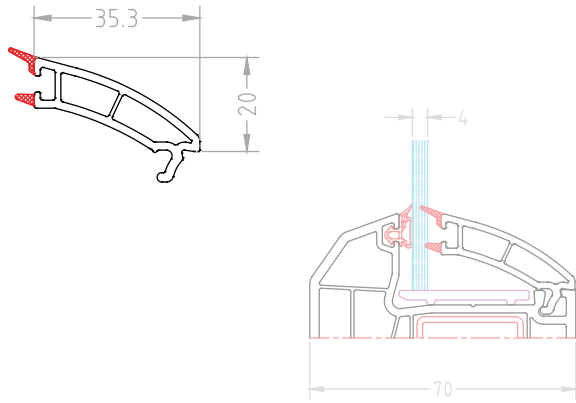


**BF 7052**  
Double glazing bead  
20 mm

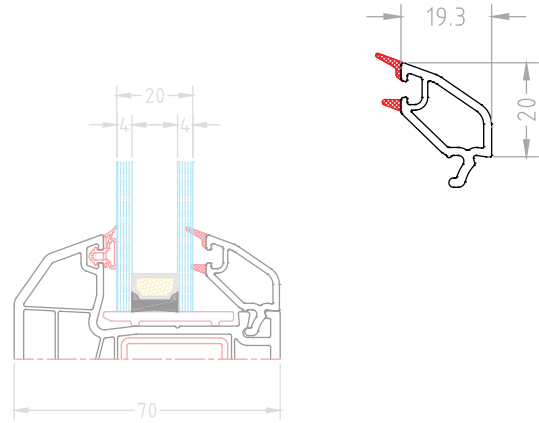

**BF 7051**  
Double glazing bead  
24 mm

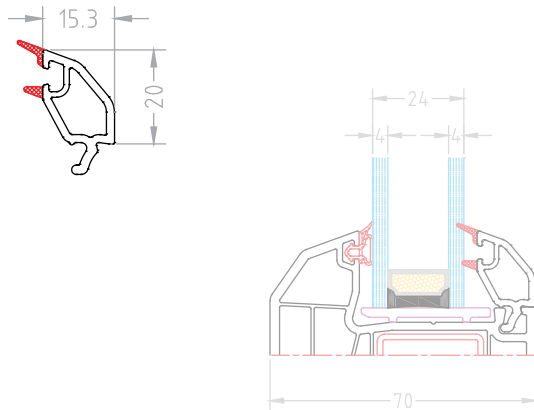

**BF 7054**  
Triple glazing bead  
30 mm

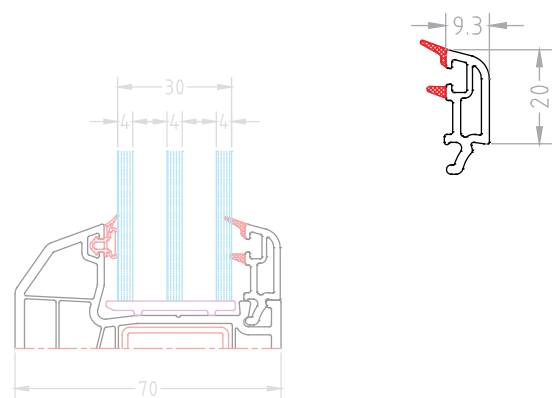

### Glazing Beads for uPVC Windows and Doors


Glazing beads are crucial components in uPVC windows and doors, ensuring the glass panes are securely held in place while providing a neat and finished appearance. These beads are typically made from the same uPVC material as the window or door frames, ensuring a seamless and cohesive look.

✓ Durability


✓ Low Maintenance

✓ Energy Efficiency


**BF 5035**  
Profile extension  
70\*100mm

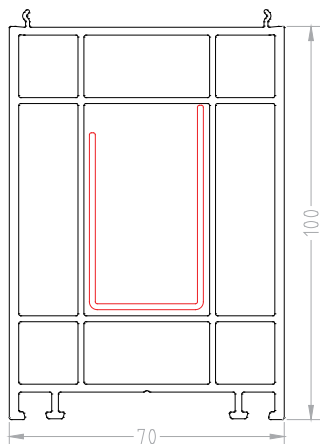


**BF 5031**  
Profile extension  
70\*25mm

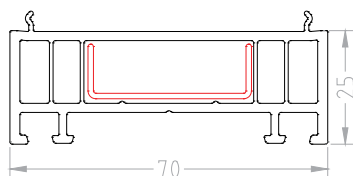


**BF 7707**  
Treshold




**BF 7210**  
Connecting pillar




**BF 5025**  
Additional cornice  
part - Adaptor




**BF 8536**  
Window Drainboard



**BF 7208**  
Blind box extension



**BF 7209**  
Angle connection  
pipe




**BF 7708**  
Treshold cap 70




**BF 7713**  
False mullion cap 70




**BF 7710**  
Pipe adaptor




**OB 0097**  
Wide T-bar coupling 70



**OB 0034**  
Narrow T-bar coupling 60



**BF 7202**  
Connecting molding




#### Iron reinforcement

Can be used for:

**BF 7001** Frame profile and

**BF 7021** Mullion (T-bar) profile

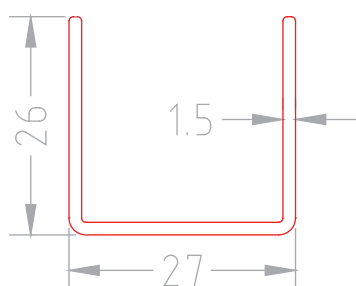


**BF 405-10** (Thickness 1.0mm) **BF 405-12** (Thickness 1.2mm) **BF 405-15** (Thickness 1.5mm)

#### Iron reinforcement

Can be used for:

**BF 6041** Door sash

**BF 6051** Outward door sash

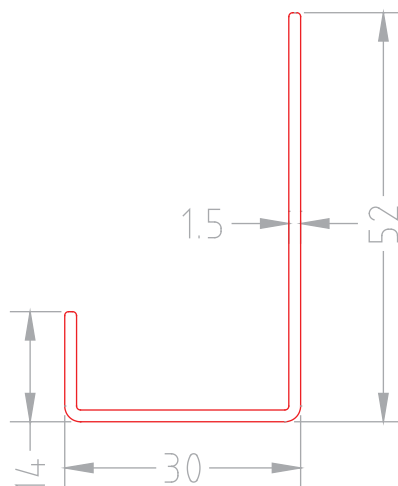


**BF 403-10** (Thickness 1.0mm) **BF 403-12** (Thickness 1.2mm) **BF 403-15** (Thickness 1.5mm)

#### Iron reinforcement

Can be used for:

**BF 6031** False mullion profile

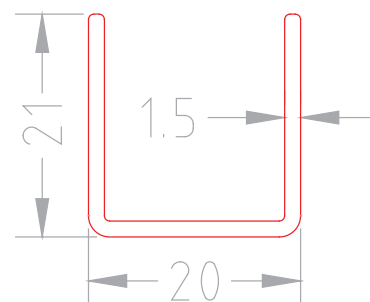


**BF 404-10** (Thickness 1.0mm) **BF 404-12** (Thickness 1.2mm) **BF 404-15** (Thickness 1.5mm)

#### Iron reinforcement

Can be used for:

**BF 7011** Sash profile




**BF 406-10** (Thickness 1.0mm) **BF 406-12** (Thickness 1.2mm) **BF 406-15** (Thickness 1.5mm)

#### Iron reinforcement

Can be used for:

**BF 7033** In turn door sash

**BF 5035** Profile extension 100mm

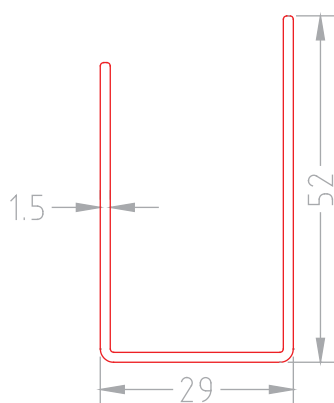


**BF 407-10** (Thickness 1.0mm) **BF 407-12** (Thickness 1.2mm) **BF 407-15** (Thickness 1.5mm)

#### Iron reinforcement

Can be used for:


**BF 5031** Profile extension 25mm

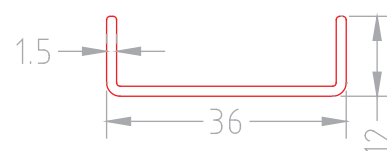

**BF 408-10** (Thickness 1.0mm) **BF 408-12** (Thickness 1.2mm) **BF 408-15** (Thickness 1.5mm)


## DOOR SYSTEM

Application of frame and door sash

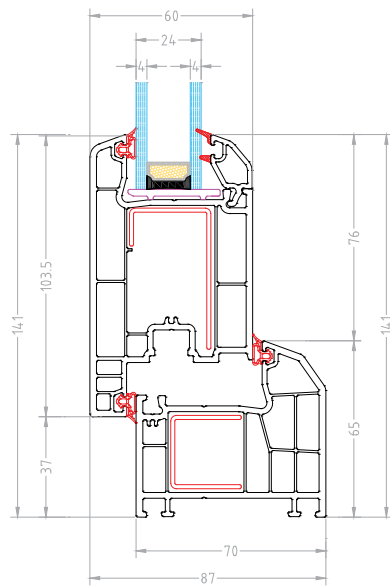


## WINDOW SYSTEM

Application of frame and window sash

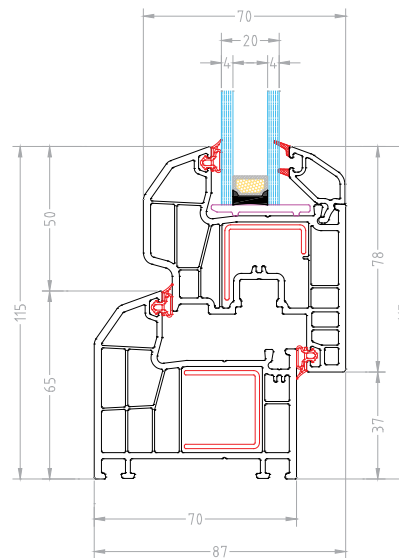


## DOOR SYSTEM

Application of frame and outward opening door sash

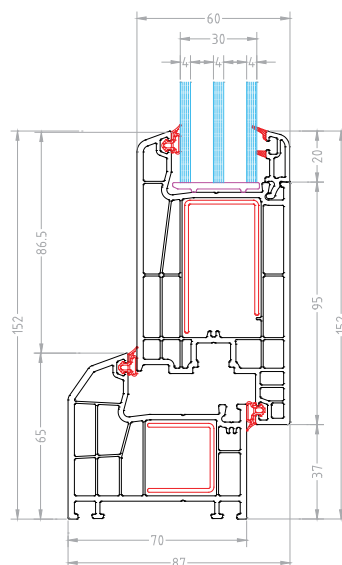


## WINDOW SYSTEM

Application of sash and false mullion profile

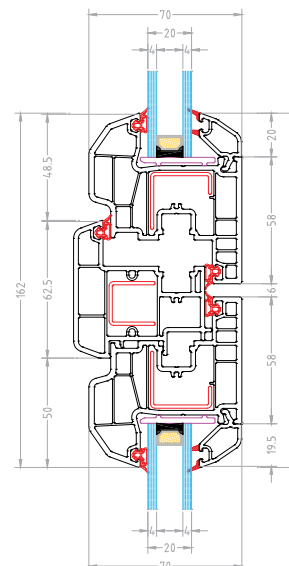


## WINDOW SYSTEM

Application of sash and Mullion (T-bar) profile

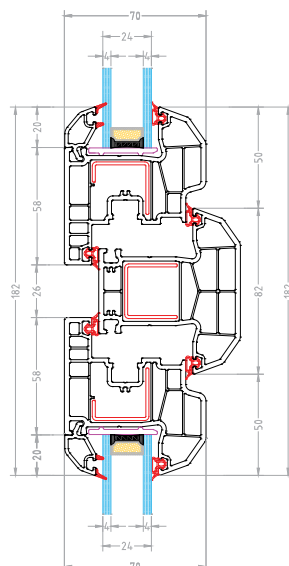


## WINDOW SYSTEM

Application of frame, sash and connecting pillar (90°)

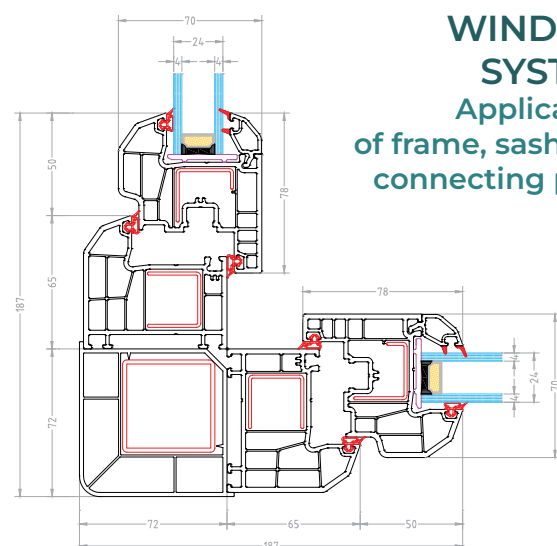


## WINDOW SYSTEM

Application of frame extension 25mm

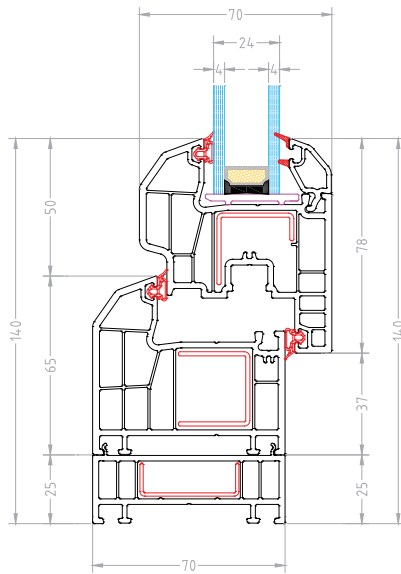


## WINDOW SYSTEM

Application of frame extension 100mm

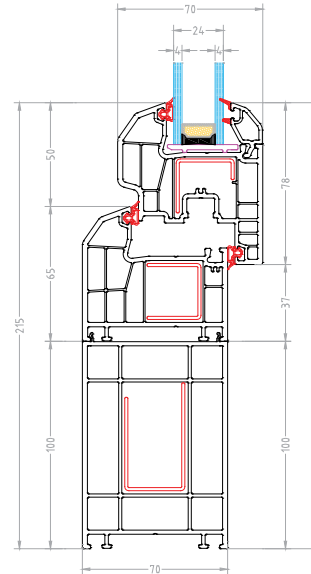


## DOOR SYSTEM

Application of 24mm door panel

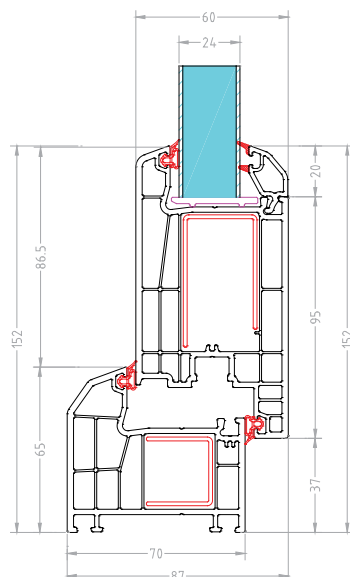


## DOOR SYSTEM

Application of single glass (4mm)

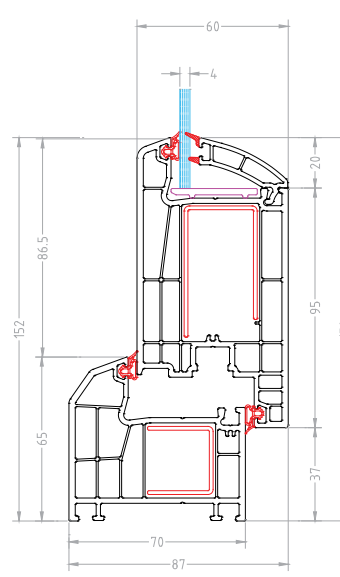


## DOOR SYSTEM

Application of door sash with false mullion

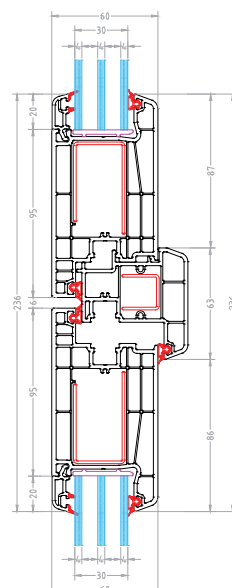


## WINDOW SYSTEM

Application of connection molding

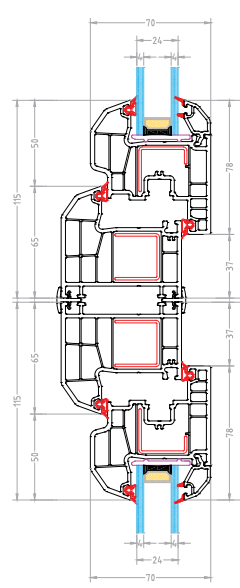


## WINDOW SYSTEM

Application of additional cornice part on the wall

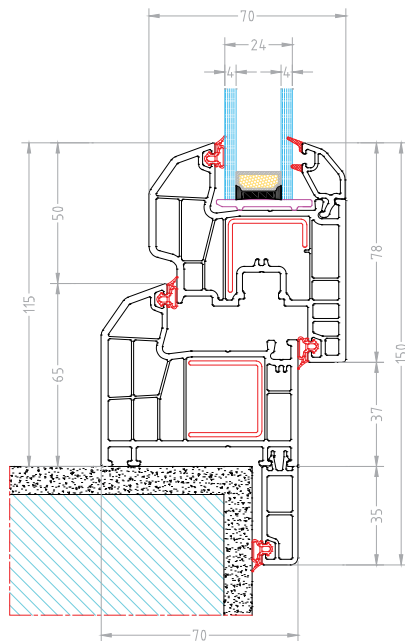


## WINDOW SYSTEM

Drainage view

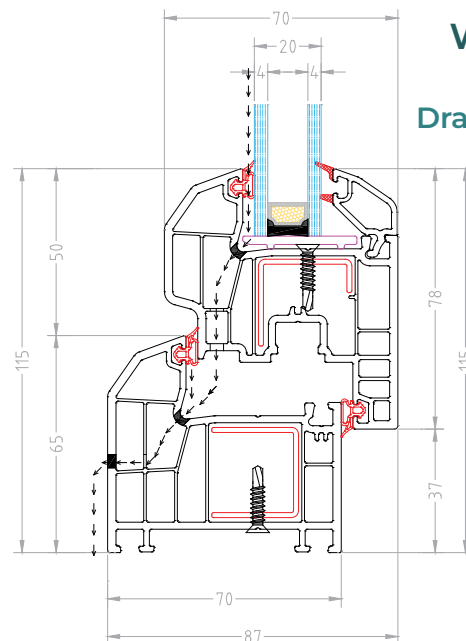

## WINDOW SYSTEM

Application of outside ALU window sill and inside PVC window sill

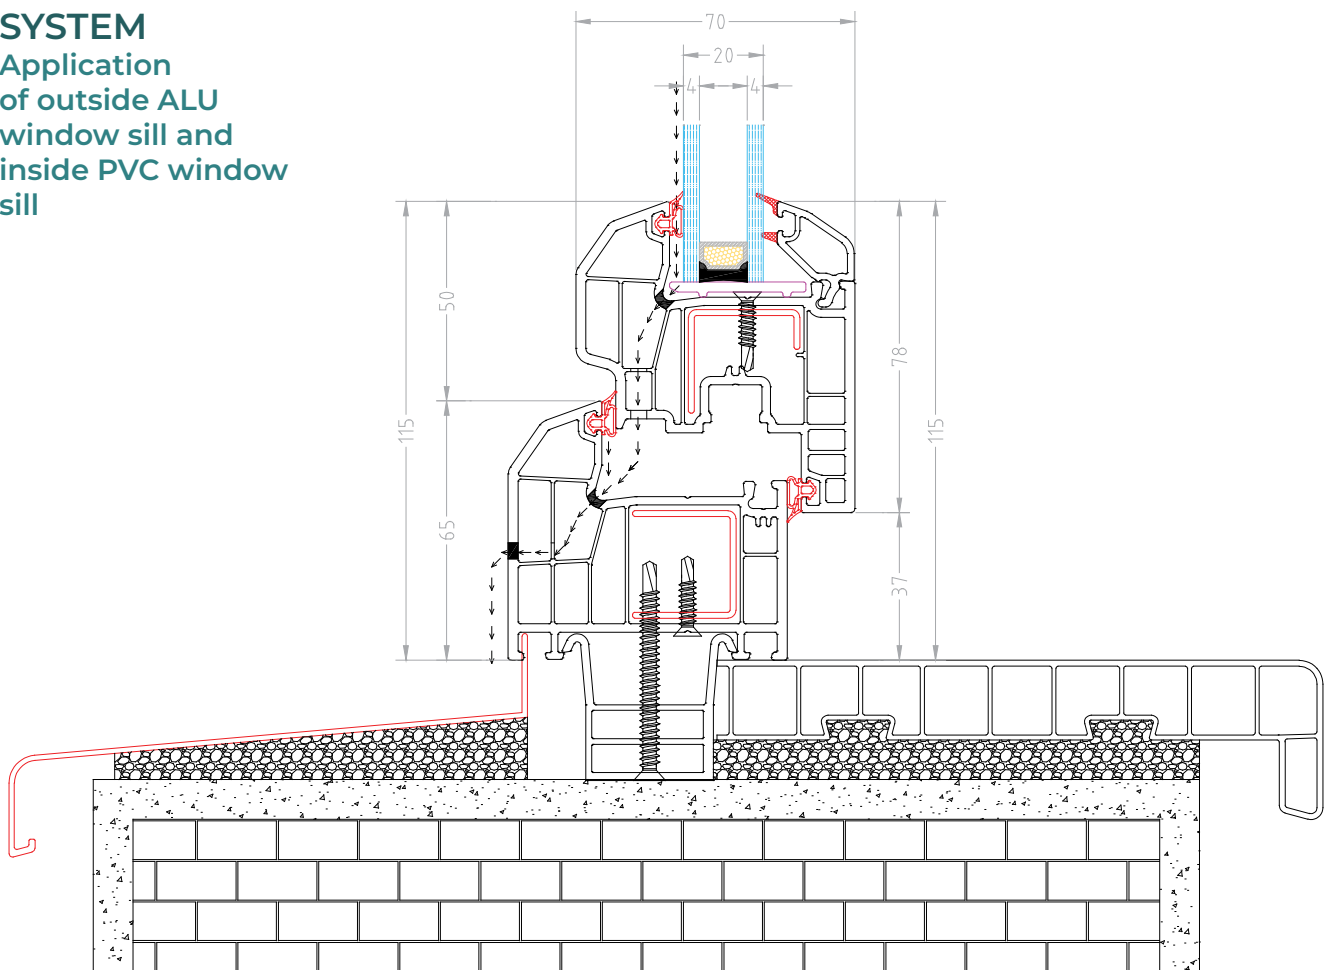



## Cost-Effective

uPVC profiles are more affordable than aluminum or wood alternatives, offering a great balance between price, performance, and longevity.



# 6000 series

The 6000 system, featuring four chambers, is crafted for clients seeking a blend of modern elegance, practicality, and functionality. It ensures maximum comfort and greatly improves the quality of life for all users.



## 4 chambers

Designed with four-chamber technology, this system provides exceptional thermal and sound insulation.



## 2 gaskets

Two gaskets ensure excellent windproofing, optimal wind protection, and superior sound insulation.



## Double glass

Available with single glass of 4mm, two-layer 20mm and 24mm glass, and triple 30mm glass.



## 60mm width

Our 60mm wide uPVC profile delivers outstanding durability, energy efficiency, and a stylish design.



Quality and certified



## Standard colors of our uPVC profiles

All other colors can be made to order



White



Anthracite



Golden Oak



Dark Oak



Nussbaum



Jet Black



Mahogany

## Why to choose our products?

Our PVC window and door systems are manufactured using advanced technology and provide an excellent level of acoustic and thermal insulation, achieving the highest quality standards available.



Environment Friendly



Easy Installation



Cost Effective



Noise Reduction



Can be recycled



Less Maintenance



Fire Retardant



Long life



Thermal Insulation



Modern design



### Premium uPVC profiles

Created from high-quality raw materials



### Innovation

Enhanced durability and energy efficiency for construction needs




### Reliability

Our uPVC profiles are designed for unmatched reliability




Scan code and read more informations about this uPVC profile series.


**BF 6001**  
Frame profile

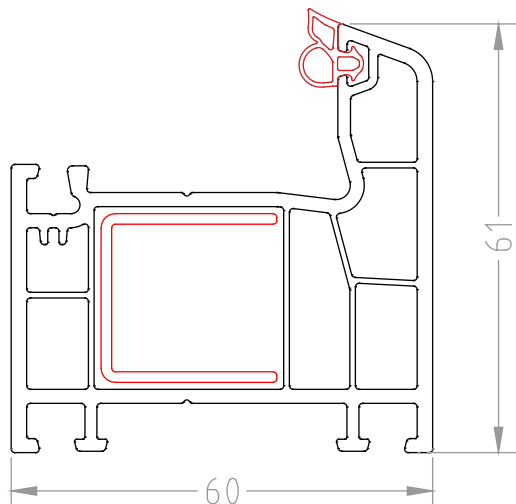


**BF 6011**  
Sash profile

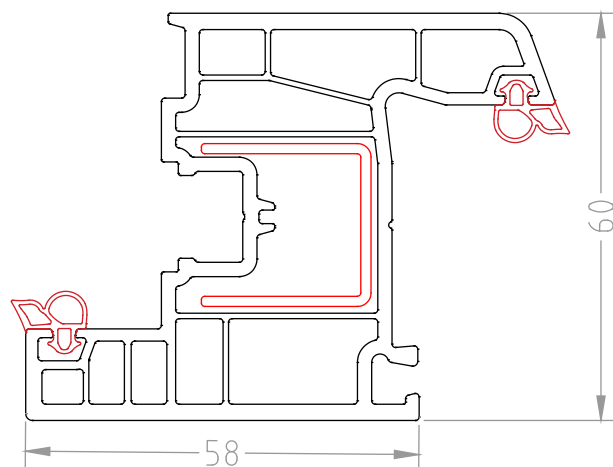

**BF 6021**  
Mullion (T-bar) profile

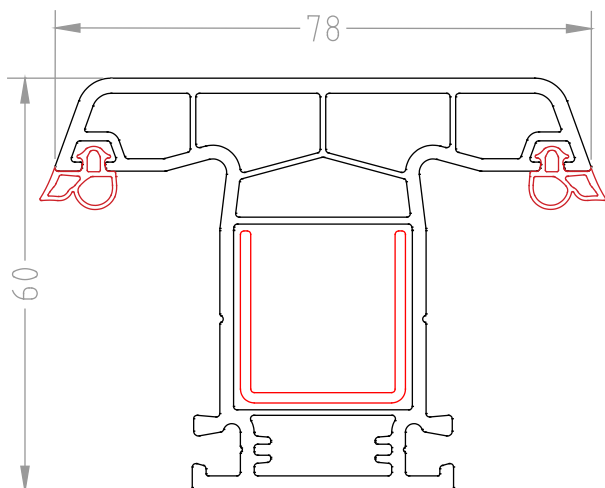

**BF 6031**  
False mullion profile

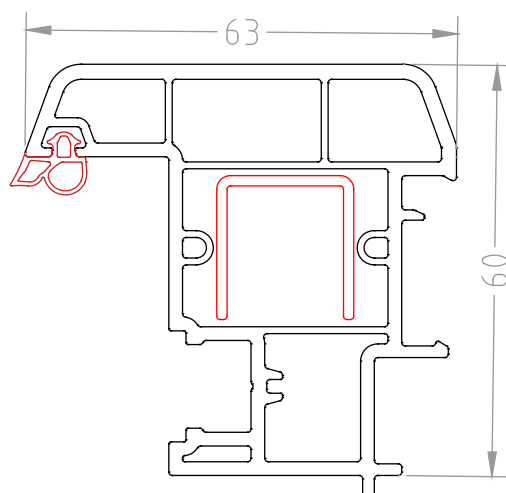

Energy  
efficiency




Outstanding  
durability




Stylish  
design


**BF 6041**  
In turn door  
sash profile

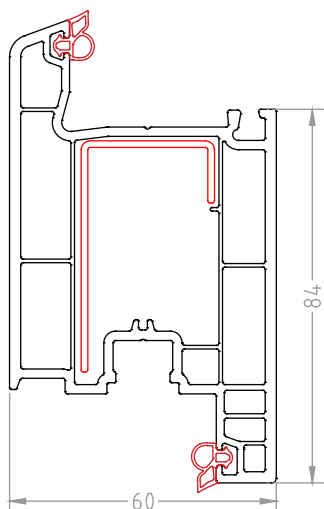


**BF 6051**  
Outward opening  
door sash profile

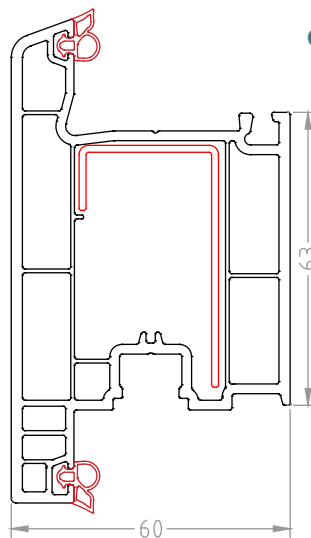


**BF 6061**  
L frame with cornice

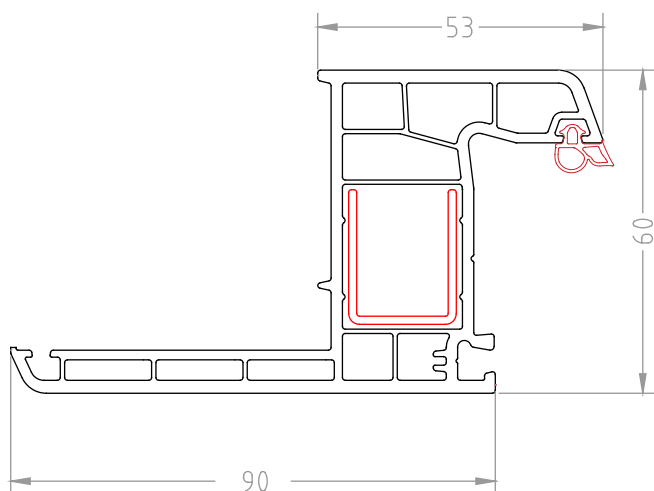


**BF 6071**  
L frame with cornice

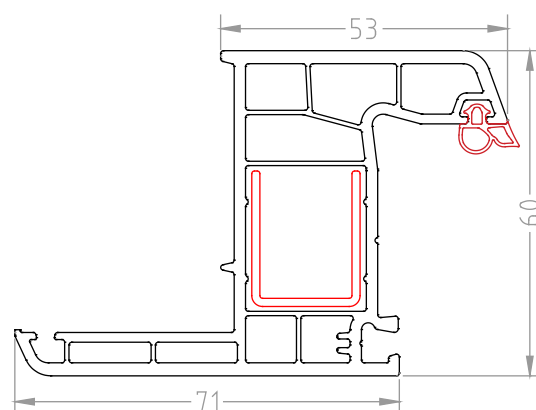


**BF 6081**  
Outward opening window sash

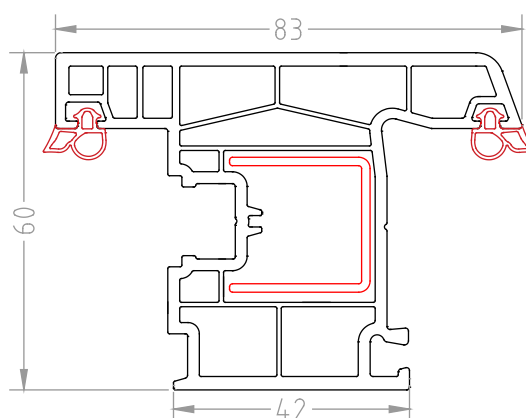


**BF 7053**  
Single glazing bead  
4 mm

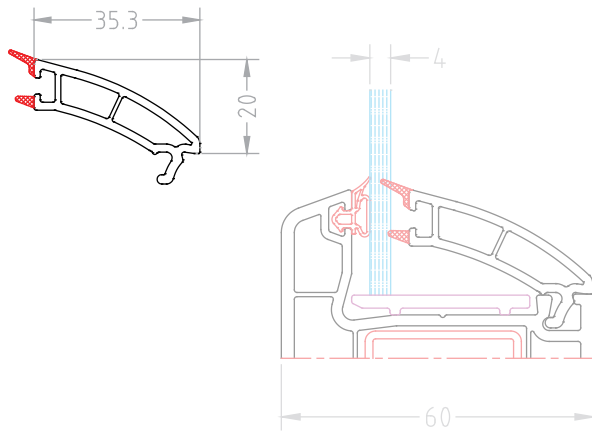


**BF 7052**  
Double glazing bead  
20 mm

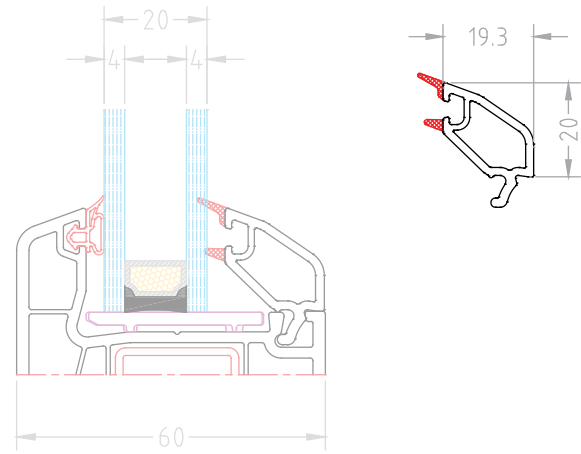

**BF 7051**  
Double glazing bead  
24 mm

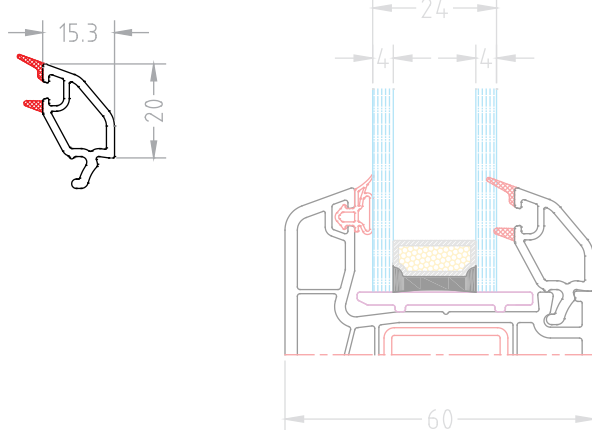

**BF 7054**  
Triple glazing bead  
30 mm

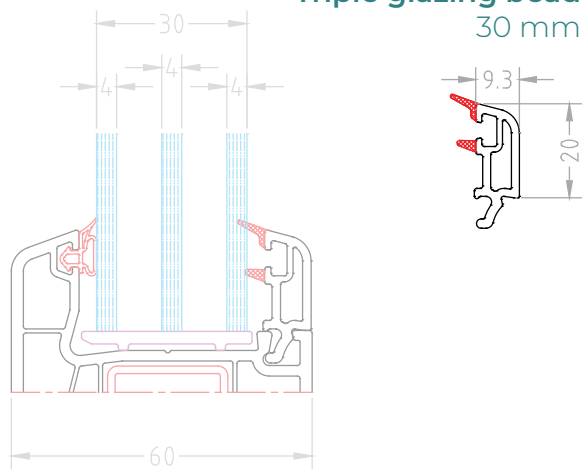

### Glazing Beads for uPVC Windows and Doors


Glazing beads are crucial components in uPVC windows and doors, ensuring the glass panes are securely held in place while providing a neat and finished appearance. These beads are typically made from the same uPVC material as the window or door frames, ensuring a seamless and cohesive look.

✓ Durability


✓ Low Maintenance

✓ Energy Efficiency

**BF 7210**  
Connecting pillar




**BF 7209**  
Angle connection pipe




**BF 7713**  
False mullion cap 70




**BF 5025**  
Additional cornice  
part - Adaptor




**BF 8536**  
Window Drainboard




**BF 7208**  
Blind box extension




**BF 7707**  
Treshold




**OB 0034**  
Narrow T-bar coupling 60

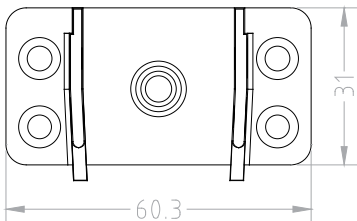

**BF 6610**  
Pipe adaptor



**BF 7202**  
Connecting molding



#### Iron reinforcement


Can be used for:

**BF 6001** Frame profile

**BF 6011** Sash profile

**BF 6021** Mullion (T-bar) profile

**BF 6081** Outward opening window sash

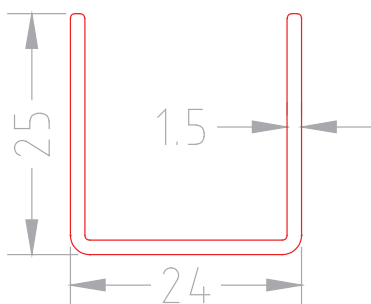

**BF 401-10**  
(Thickness 1.0mm)

**BF 401-12**  
(Thickness 1.2mm)


**BF 401-15**  
(Thickness 1.5mm)

#### Iron reinforcement

Can be used for:

**BF 6061** L Frame cornice profile

**BF 6071** L Frame cornice profile



**BF 402-10**  
(Thickness 1.0mm)

**BF 402-12**  
(Thickness 1.2mm)


**BF 402-15**  
(Thickness 1.5mm)

#### Iron reinforcement

Can be used for:

**BF 6041** In turn door sash profile

**BF 6051** T door sash profile

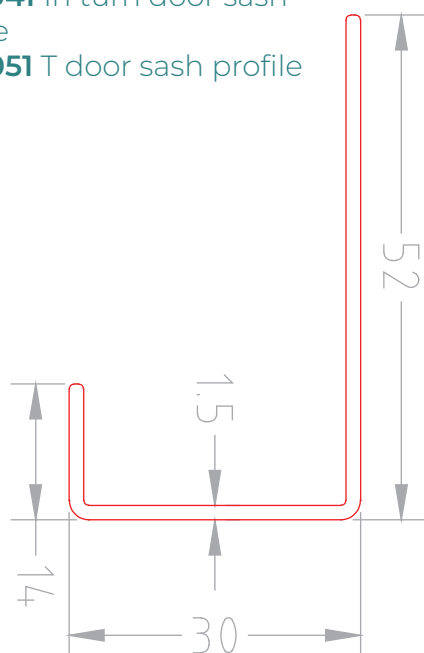

**BF 403-10**  
(Thickness 1.0mm)


**BF 403-12**  
(Thickness 1.2mm)

**BF 403-15**  
(Thickness 1.5mm)

#### Iron reinforcement

Can be used for:

**BF 6031** Moving mullion profile

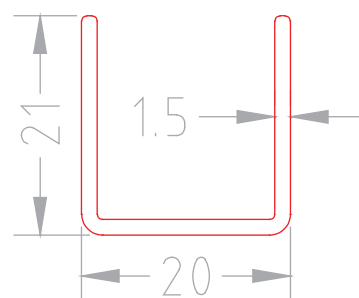

**BF 404-10**  
(Thickness 1.0mm)

**BF 404-12**  
(Thickness 1.2mm)


**BF 404-15**  
(Thickness 1.5mm)

#### Iron reinforcement

Can be used for:

**BF 6001** Frame profile,

**BF 6021** Mullion (T-bar) profile

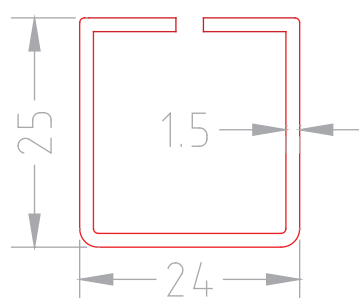

**BF 422-10**  
(Thickness 1.0mm)


**BF 422-12**  
(Thickness 1.2mm)

**BF 422-15**  
(Thickness 1.5mm)

Our uPVC profiles come with the option for steel reinforcement and a variety of multi-point locking systems places that make them among the safest and securest systems on the market.


## DOOR SYSTEM

Application of frame and door sash

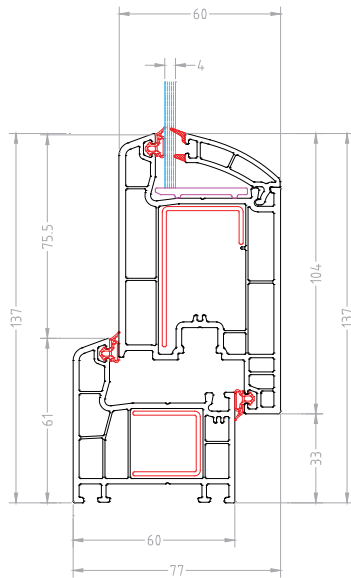


## WINDOW SYSTEM

Application of frame and window sash

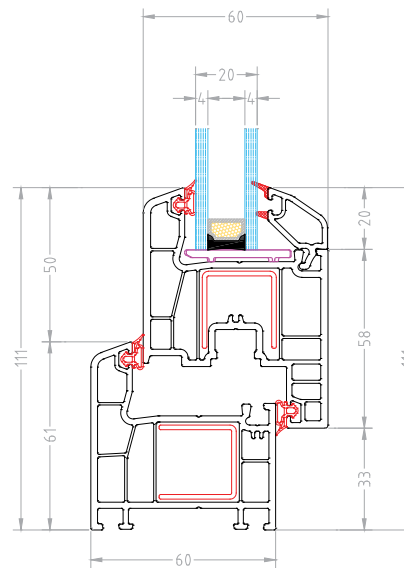


## DOOR SYSTEM

Application of frame and outward opening door sash

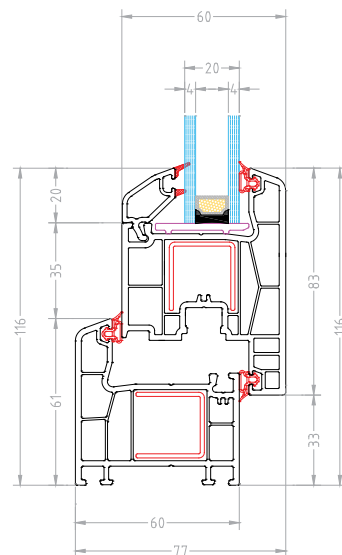


## WINDOW SYSTEM

Application of sash and false mullion profile

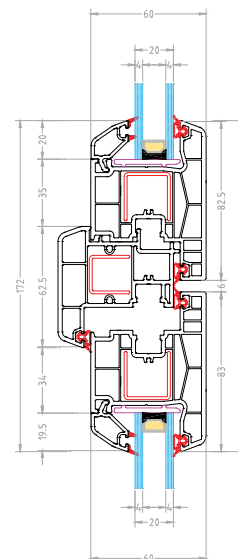


## WINDOW SYSTEM

Application of sash and Mullion (T-bar) profile

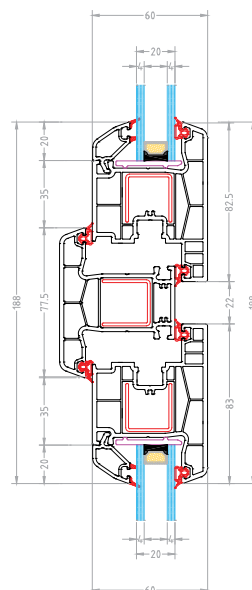


## WINDOW SYSTEM

Application of frame, sash and connecting pillar (90°)

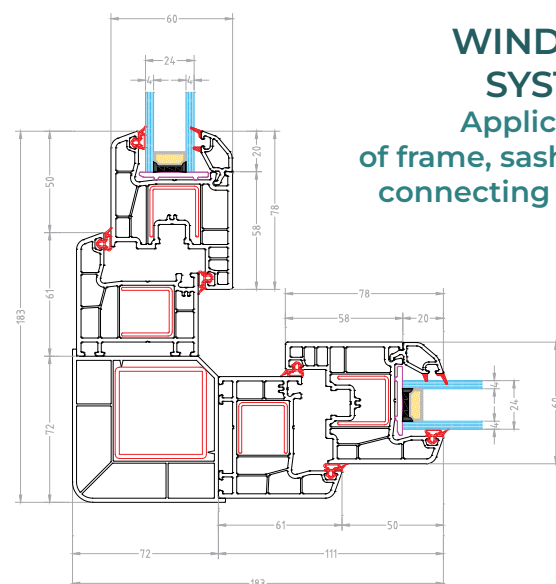


## WINDOW SYSTEM

Application of cornice profile on the wall

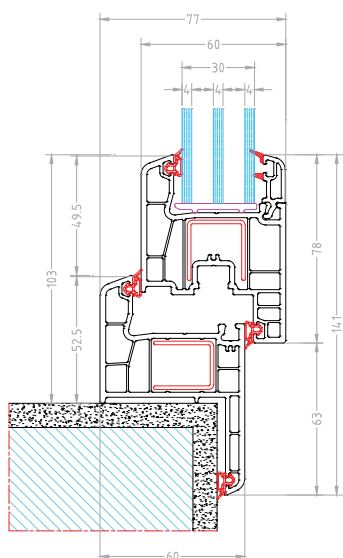


## WINDOW SYSTEM

Drainage view

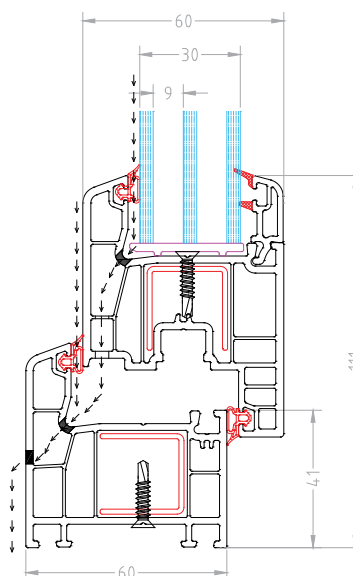


## DOOR SYSTEM

Application of 24mm door panel

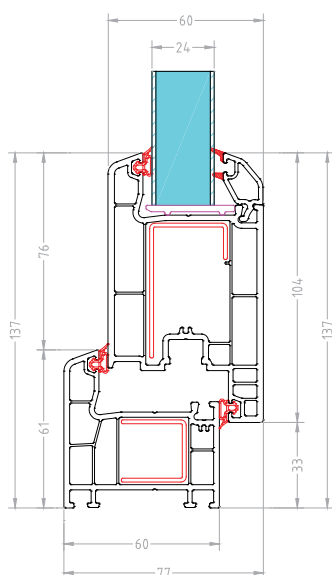


## DOOR SYSTEM

Application of single glass (4mm)

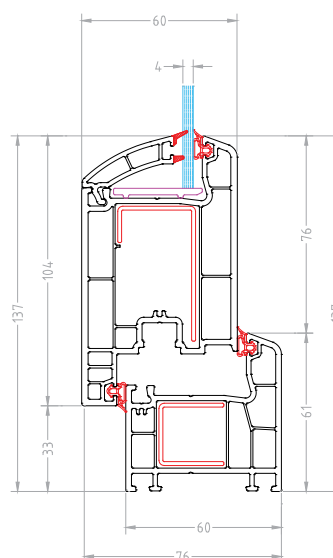


## DOOR SYSTEM

Application of door sash with false mullion

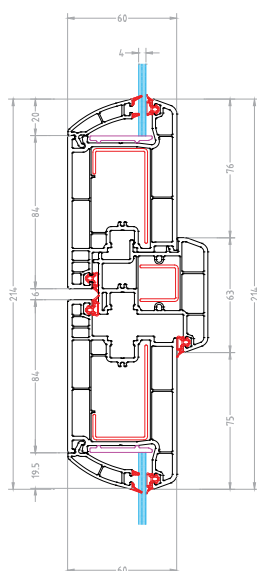


## WINDOW SYSTEM

Application of connection molding

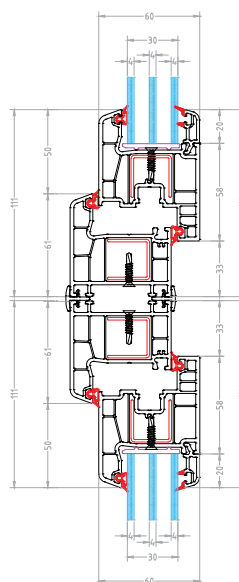

**WINDOW  
SYSTEM**  
Application  
of outside ALU  
window sill and  
inside PVC window  
sill

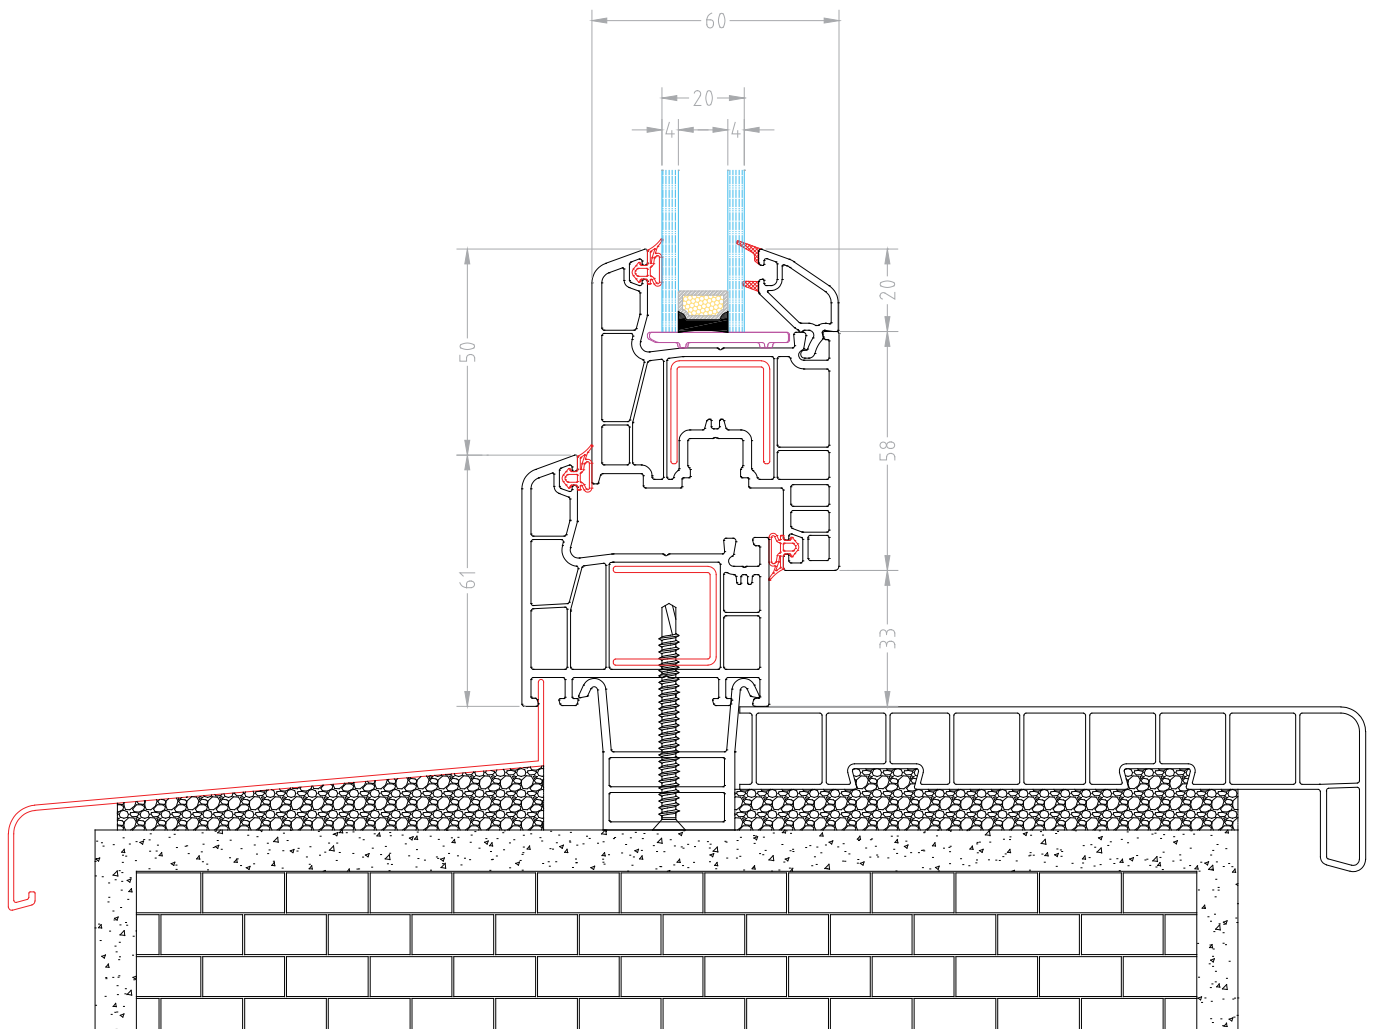



## Design Versatility

Available in a wide range of colors, finishes, and styles, uPVC profiles can mimic wood grain or come in sleek modern designs to suit any architecture.

# Unique slide

Innovative hardware design: Convenient and easy operation with little effort due to closing motion across the frame profile.

High impermeability due to circumferential gasket and active control of all locking points (also in the mullion).

- 
**Maximum operating comfort**  
 Easy to use thanks to innovative closing movement perpendicular to the frame profile and construction on roller bearings.
- 
**Tightly sealed**  
 Permanently tightly sealed, even in extreme weather events with storms and heavy rain, thanks to circumferential gasket and locking points.
- 
**Exclusive design**  
 Harmonious appearance thanks to concealed technology and modern window handles.
- 
**Premium quality**  
 Robust and well-made components, proven and tested many times over in accordance with the highest quality standards.



Quality and certified



## Standard colors of our uPVC profiles

All other colors can be made to order



White



Anthracite



Golden Oak



Dark Oak



Nussbaum



Jet Black



Mahogany

## Why to choose our products?

Our PVC window and door systems are manufactured using advanced technology and provide an excellent level of acoustic and thermal insulation, achieving the highest quality standards available.



Environment  
Friendly



Easy  
Installation



Cost  
Effective



Noise  
Reduction



Can be  
recycled



Less  
Maintenance



Fire  
Retardant



Long  
life



Thermal  
Insulation



Modern  
design



**Premium uPVC profiles**  
Created from high-quality raw materials




**Innovation**  
Enhanced durability and energy efficiency for construction needs




**Reliability**  
Our uPVC profiles are designed for unmatched reliability




Scan code and read more informations about this uPVC profile series.

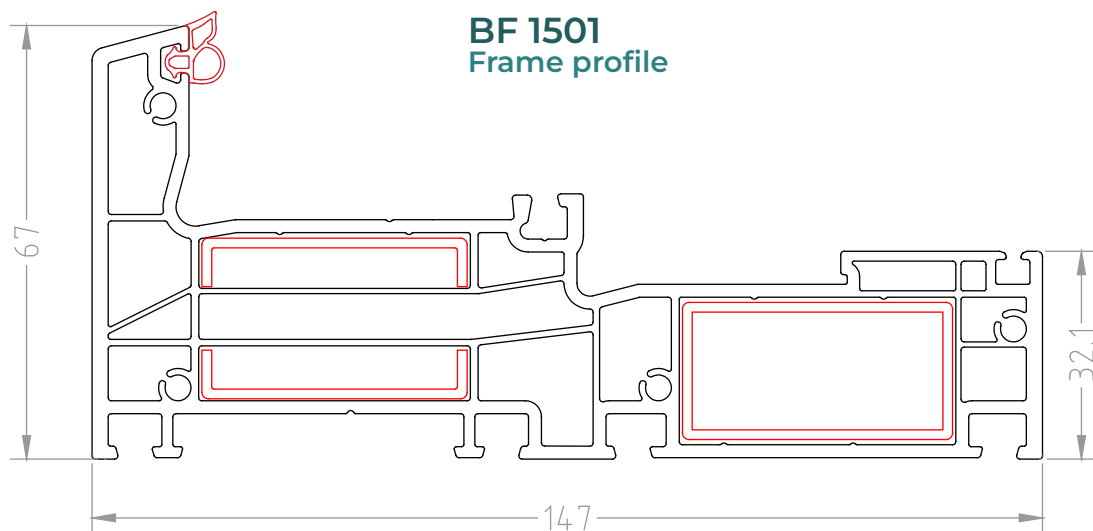


**BF 1502**  
Sliding sash

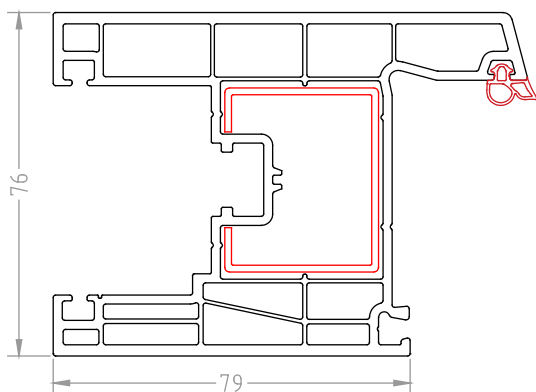


**BF 7615**  
Mullion (T-bar) profile

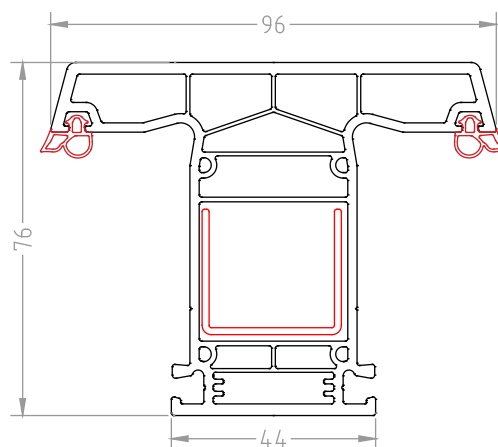


**BF 1503**  
Sliding sash cover

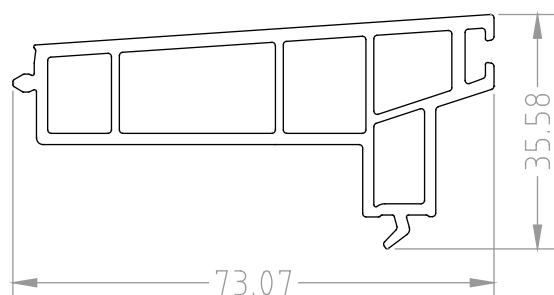


**BF 1504**  
Sliding sash cover

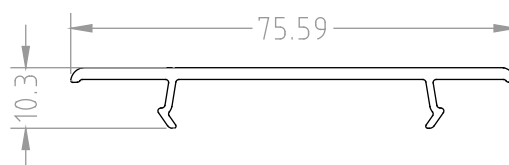


**BF 7609**  
Glazing bead  
24 mm

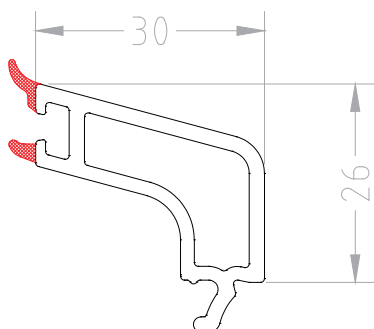


**BF 8508**  
Glazing bead  
28 mm

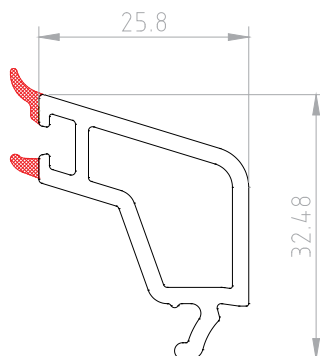


**BF 8510**  
Glazing bead  
36 mm

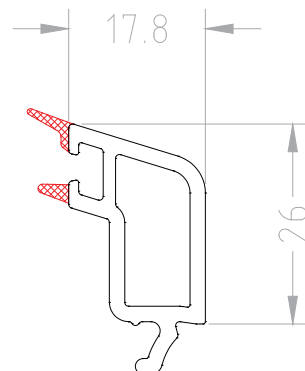

**BF 5035**  
Extension  
100 mm

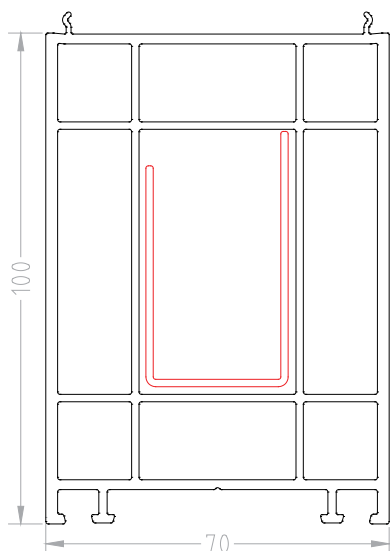

**BF 5031**  
Extension  
25 mm

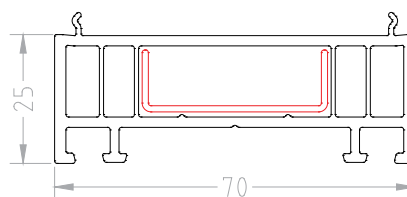


### Glazing Beads for uPVC Windows and Doors

Glazing beads are crucial components in uPVC windows and doors, ensuring the glass panes are securely held in place while providing a neat and finished appearance. These beads are typically made from the same uPVC material as the window or door frames, ensuring a seamless and cohesive look.

*Durability*  
*Low Maintenance*  
*Energy Efficiency*

### Iron reinforcement


Can be used for:  
**BF 1501** Frame profile

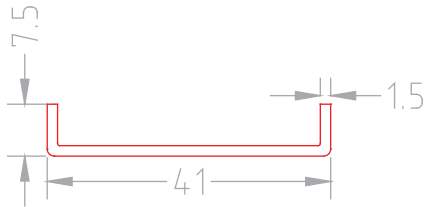

**BF 417-12** (Thickness 1.2mm) **BF 417-15** (Thickness 1.5mm) **BF 417-20** (Thickness 2.0mm)

### Iron reinforcement


Can be used for:  
**BF 1501** Frame profile



**BF 418-12** (Thickness 1.2mm) **BF 418-15** (Thickness 1.5mm) **BF 418-20** (Thickness 2.0mm)

### Iron reinforcement


Can be used for:  
**BF 7615** T Bar profile



**BF 409-12** (Thickness 1.2mm) **BF 409-15** (Thickness 1.5mm) **BF 409-20** (Thickness 2.0mm)

### Iron reinforcement


Can be used for:  
**BF 1502** Sash profile



**BF 419-12** (Thickness 1.2mm)  
**BF 419-15** (Thickness 1.5mm)  
**BF 419-20** (Thickness 2.0mm)

### Iron reinforcement


Can be used for:  
**BF 5035** Profile extension 100mm



**BF 407-10** (Thickness 1.0mm)  
**BF 407-12** (Thickness 1.2mm)  
**BF 407-15** (Thickness 1.5mm)

### Iron reinforcement


Can be used for:  
**BF 5031** Profile extension 25mm



**BF 408-12** (Thickness 1.2mm)  
**BF 408-15** (Thickness 1.5mm)  
**BF 408-20** (Thickness 2.0mm)


### Iron reinforcement

Can be used for:  
**BF 7615** T bar squared




**BF 413-12** (Thickness 1.2mm)  
**BF 413-15** (Thickness 1.5mm)  
**BF 413-20** (Thickness 2.0mm)


**BF 1511 - Under rail**

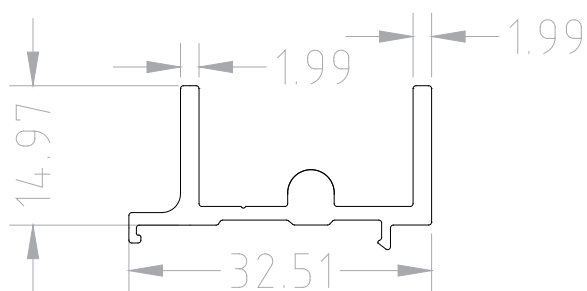


**BF 1512 - Top guide**

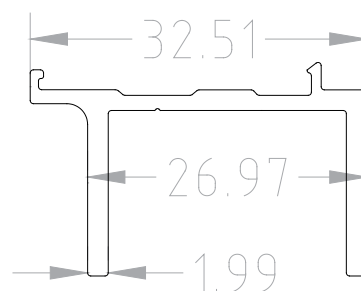


**BF 1514 - Plate guide**

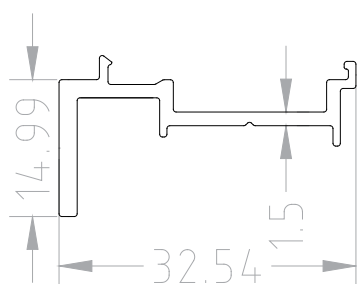


**BF 1513**  
**Espagnolette extension**

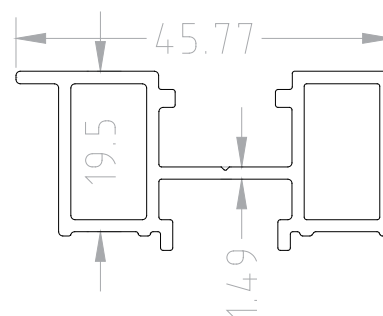


**BF 1515 - Double sash connector**

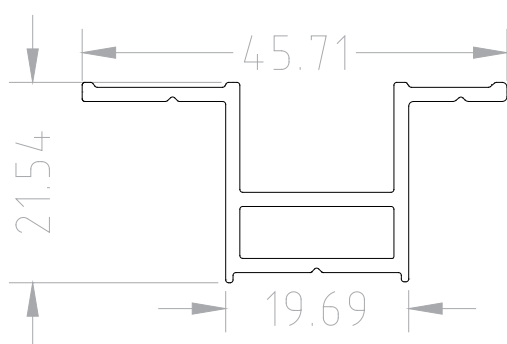


**BF 1516- T cover**

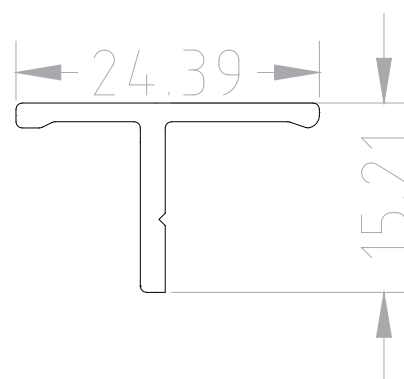


## 603444 - Central locking




## 764350 - Centre lock componente - Horizontal

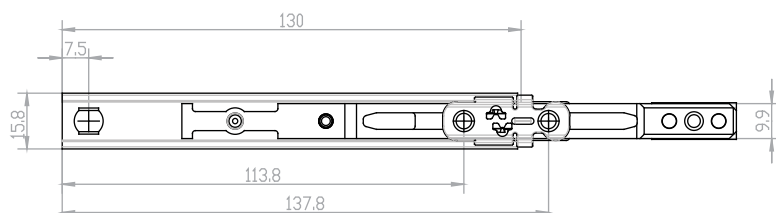


## 255281 - Centre lock componente - Vertical

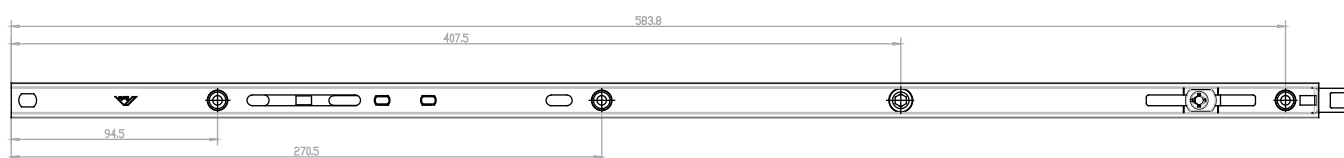


## 821685 - Control unit

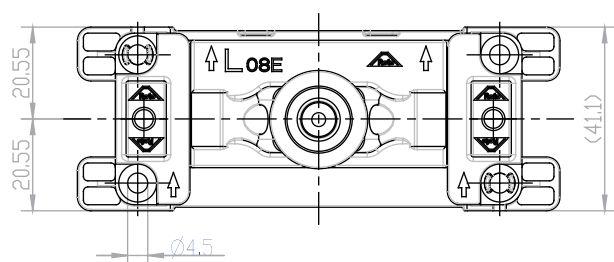


## 260275 - Corner drive

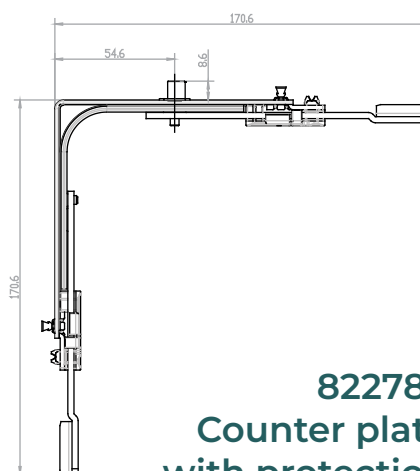


## 260272 - Corner drive

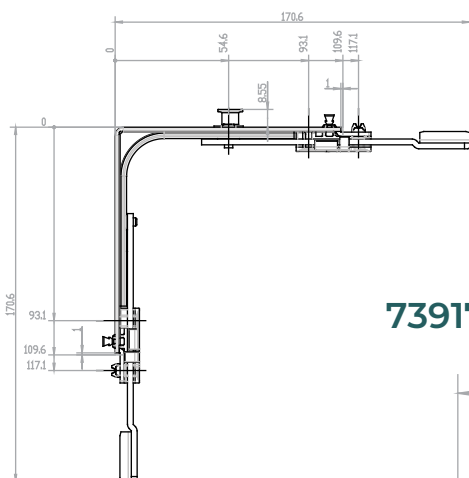


## 822789 Counter plate with protection

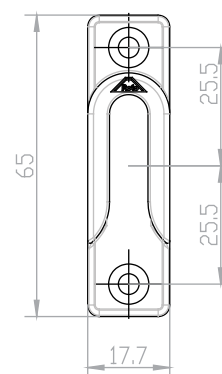


## 739179 - Stopper




## 792191 - Espagnolette

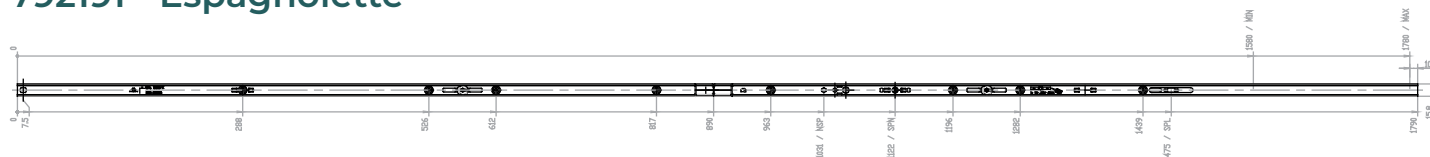


## 297858 - Espagnolette extension

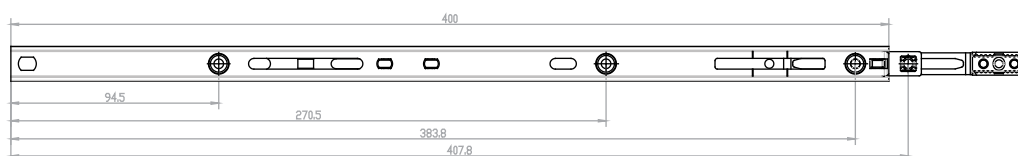


## 635307 - Front stopper

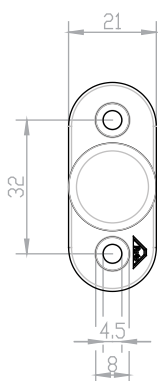

## 821687 - Left central lock

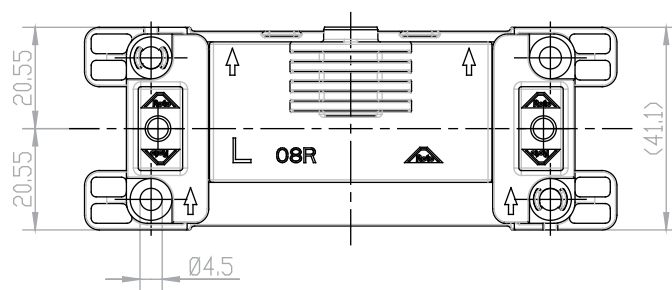



## 2031030 - Locking pin




## 2031030

Standard equivalent

## 793493 - MUL striker

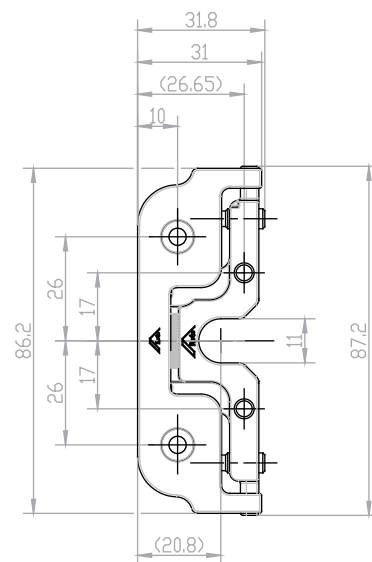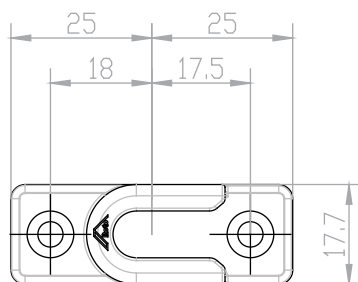


## 821686 - Roller unit

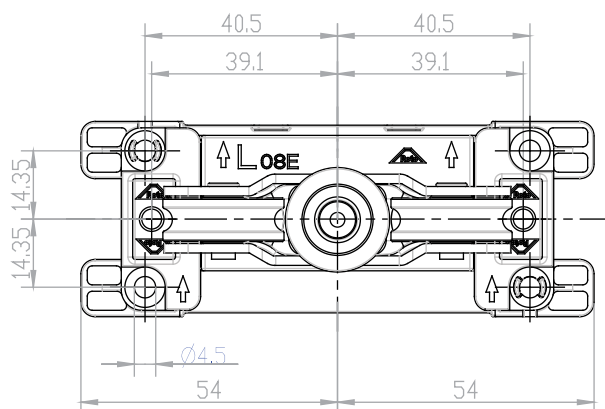


## 799005

### Handle for Unique slide

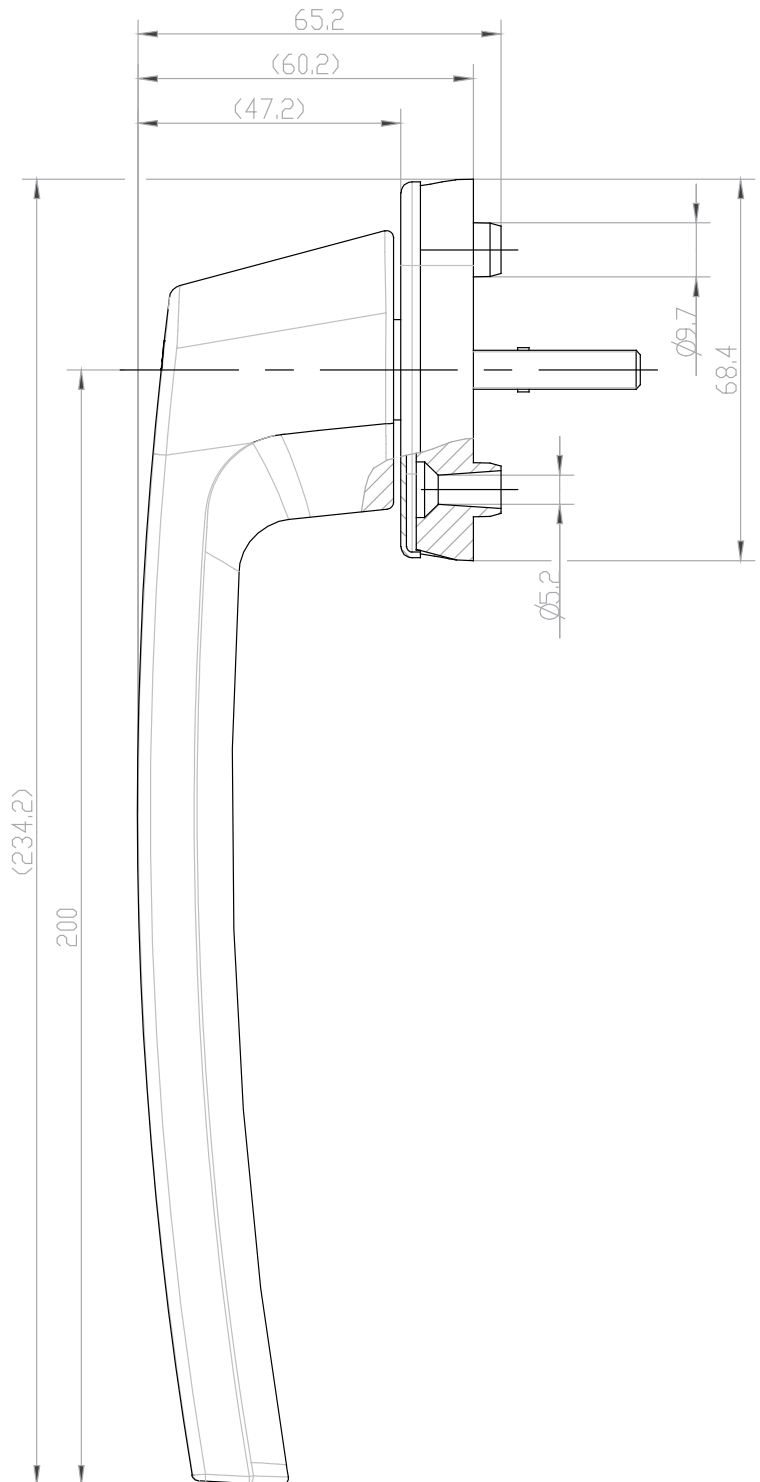


## Sliding frame

Application of frame with glass

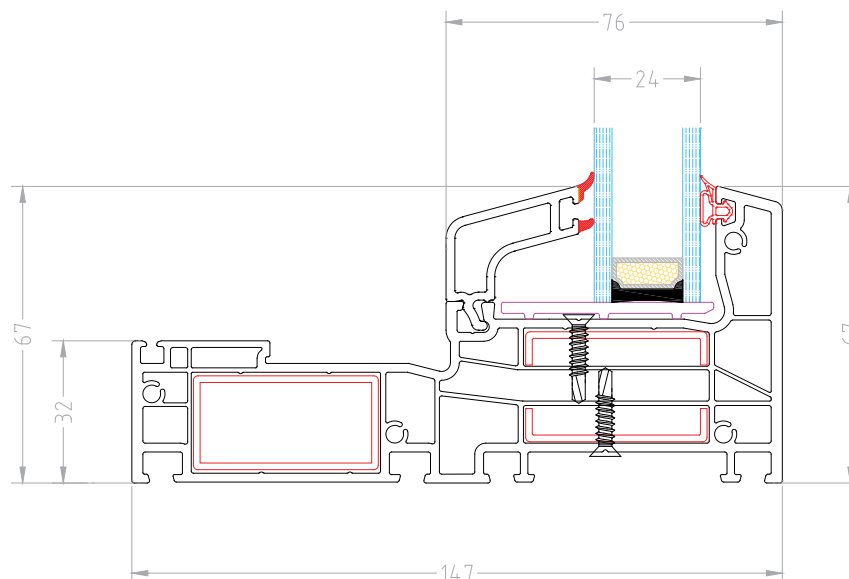


## Slide system

Assembly of full slide system

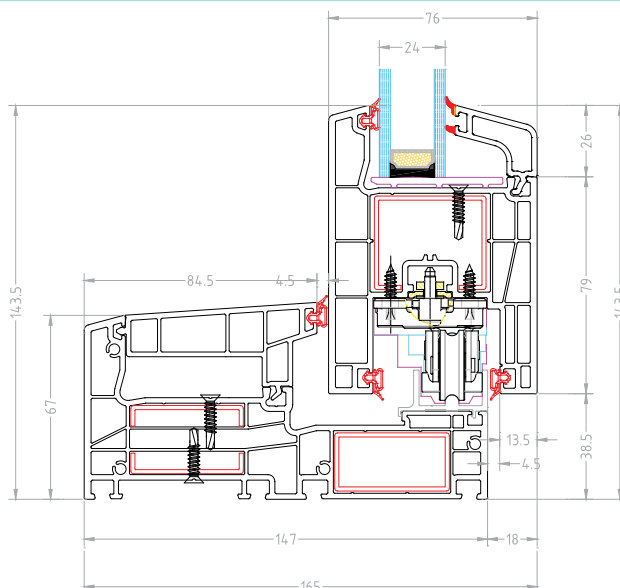


## T-bar application


Application of Mullion (T-bar) profile

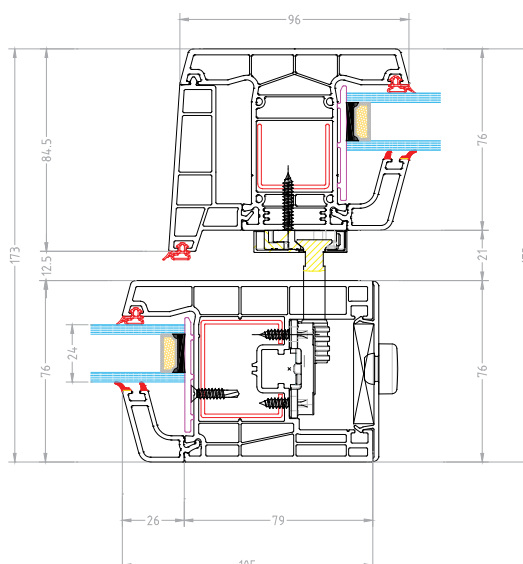


**Slide system**  
Assembly with handles

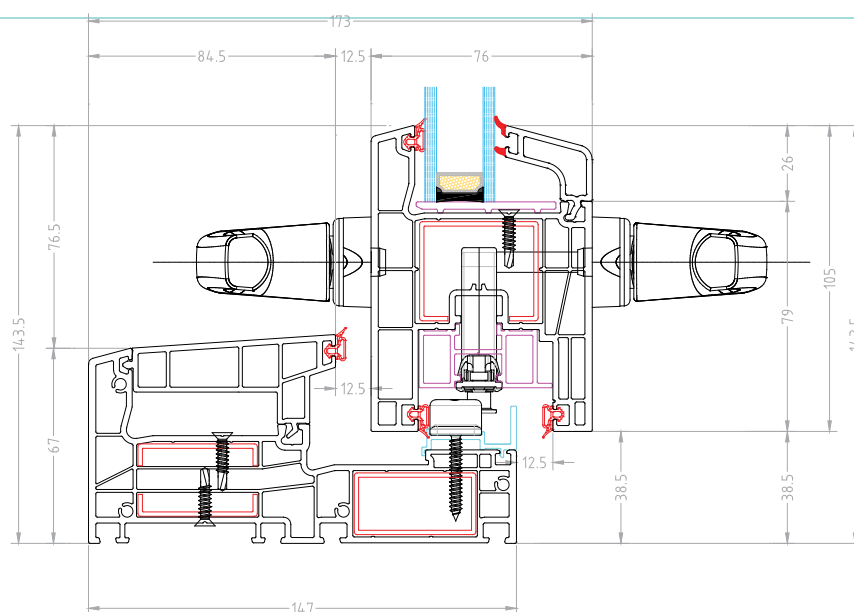



**Drainage view**

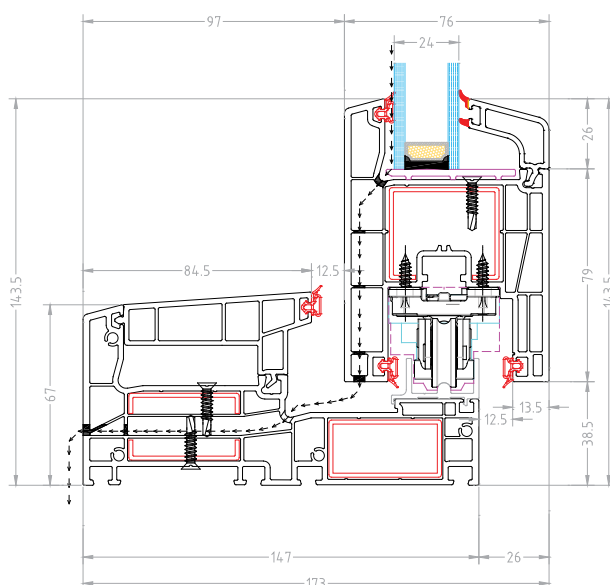



**Double slide system**  
Application of two sliding sash

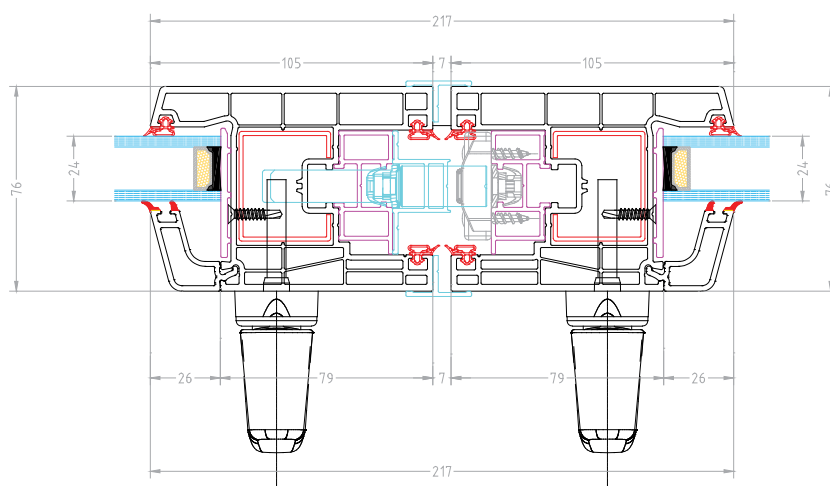

## Slide system Application of 25mm extension

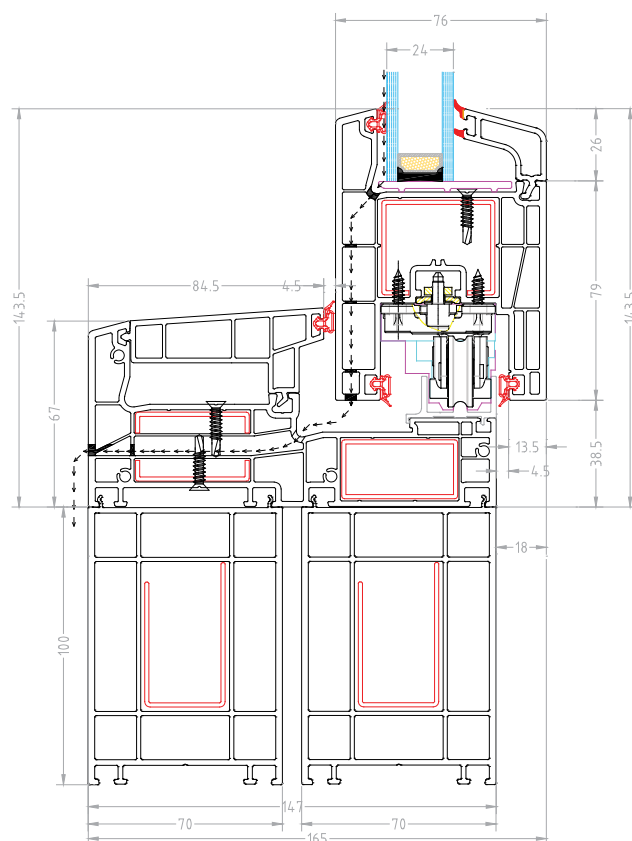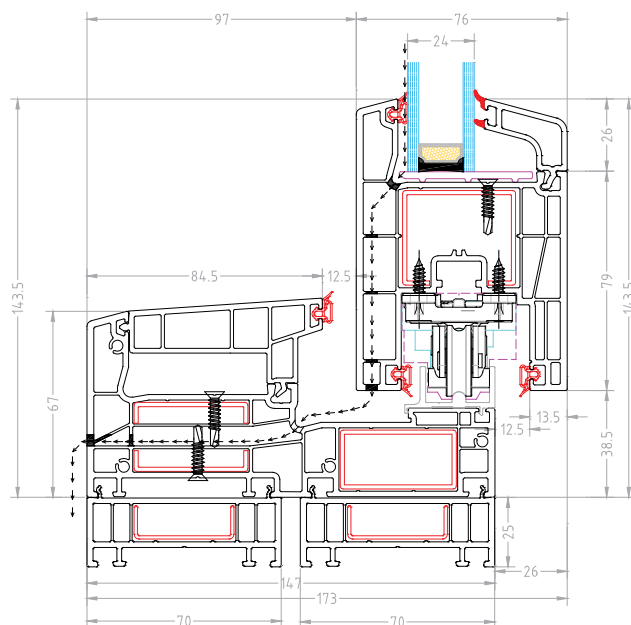

## Slide system Application of 100mm extension

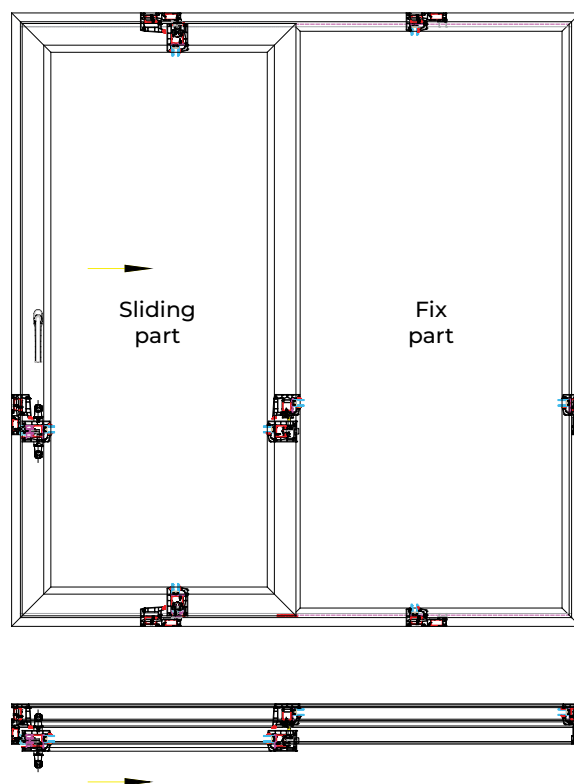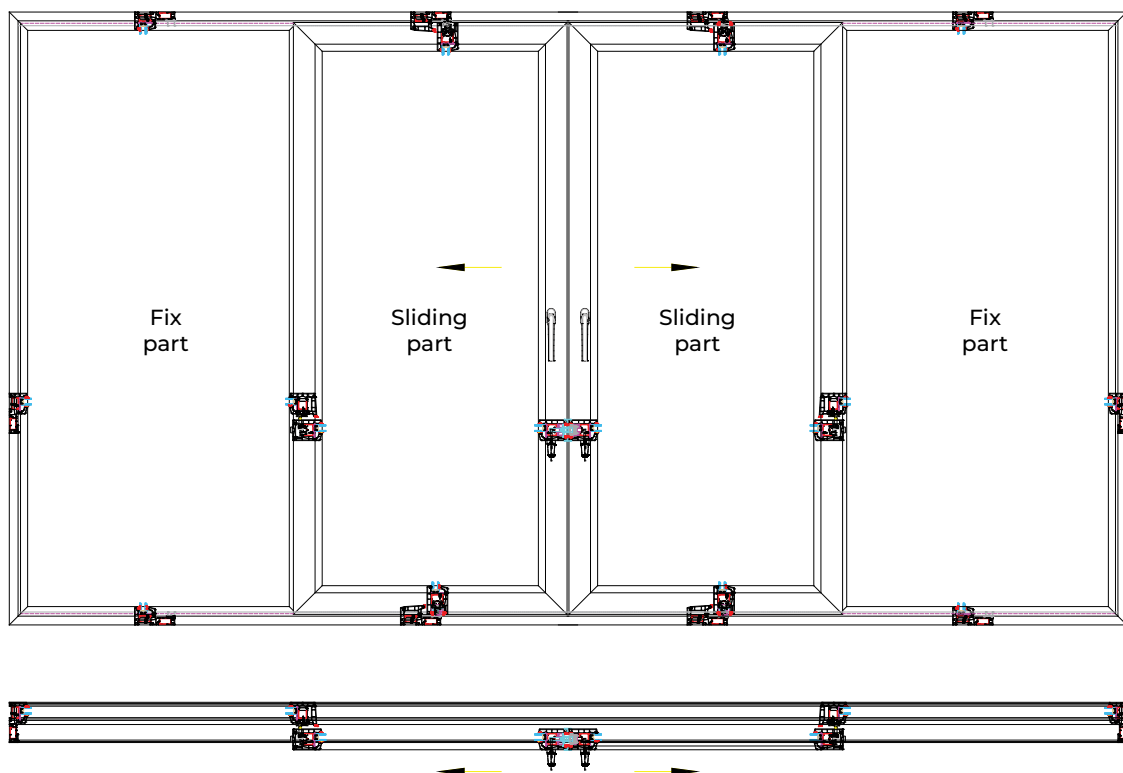



---

## Long Lifespan

With proper installation, uPVC profiles can last 20–40 years or more, maintaining their appearance and performance over time.

# Atmoslide

The Atmoslide system enhances design versatility, particularly as a window solution. Unlike tilt/turn variants, its sliding mechanism keeps the sash securely in place while providing ample space for contemporary design ideas and personalized indoor comfort. The sash runs smoothly along its track without swerving inward, ensuring both safety and a sleek appearance.

## Space Efficiency

The sliding mechanism allows for more usable space inside the room, as the sash doesn't swing inward or outward.

## Enhanced Security

The design ensures the sash remains tightly secured in its track, providing robust protection against forced entry.

## Energy Efficiency

Excellent insulation properties help maintain indoor temperatures, reducing energy costs for heating and cooling.

## Aesthetic Flexibility

The sleek and modern design can be customized to fit various architectural styles and personal preferences.



Quality and certified



## Standard colors of our uPVC profiles

All other colors can be made to order



White



Anthracite



Golden Oak



Dark Oak



Nussbaum



Jet Black



Mahogany

## Why to choose our products?

Our PVC window and door systems are manufactured using advanced technology and provide an excellent level of acoustic and thermal insulation, achieving the highest quality standards available.



Environment  
Friendly



Easy  
Installation



Cost  
Effective



Noise  
Reduction



Can be  
recycled



Less  
Maintenance



Fire  
Retardant



Long  
life



Thermal  
Insulation



Modern  
design



### Premium uPVC profiles

Created from high-quality raw materials



### Innovation

Enhanced durability and energy efficiency for construction needs




### Reliability

Our uPVC profiles are designed for unmatched reliability




Scan code and read more informations about this uPVC profile series.


**BF 3078**  
3 track sliding frame

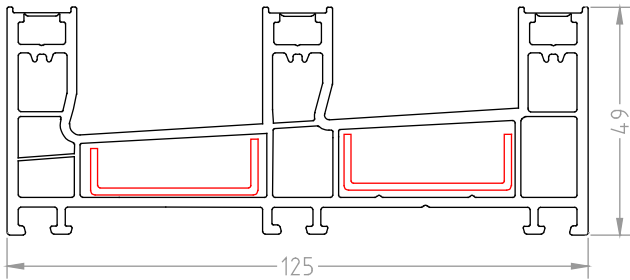


**BF 3005**  
Slide frame profile  
(with mosquito net)

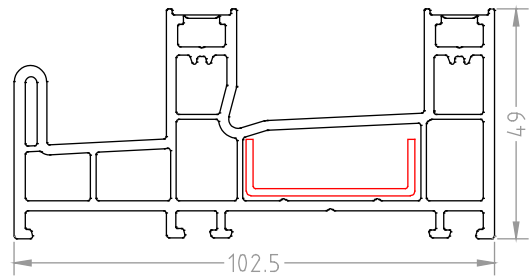


**BF 3011**  
Sliding sash profile

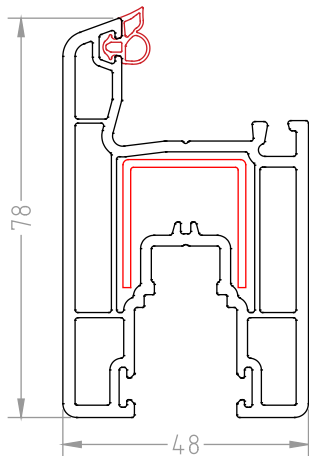


**BF 3088**  
Sliding sash profile  
(door)

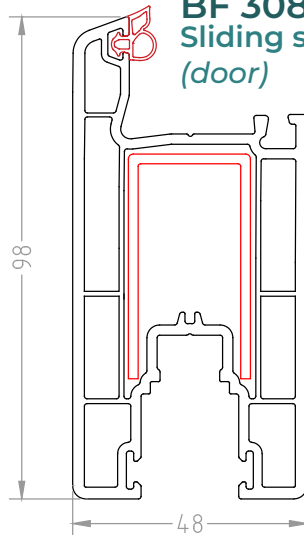


**BF 3006**  
Sash profile with  
mosquito net




**BF 3007**  
Mullion profile with  
mosquito net




**BF 3001**  
Door frame profile

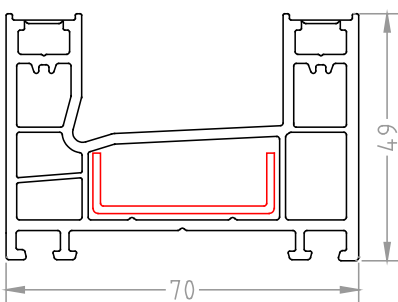



**BF 3004**  
Sliding system  
expansion profile





**BF 3031**  
Sliding frame profile  
with cornice

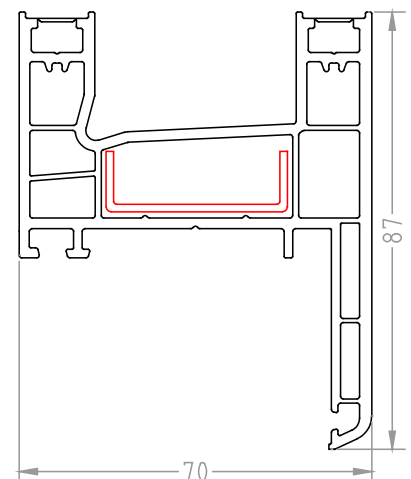



**BF 7054**  
Double glazing bead  
20 mm



**BF 3041**  
Single glazing bead  
4 mm



**BF 7055**  
Double glazing bead  
24 mm

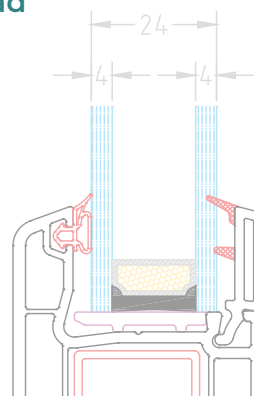


### Glazing Beads for uPVC Windows and Doors


Glazing beads are crucial components in uPVC windows and doors, ensuring the glass panes are securely held in place while providing a neat and finished appearance. These beads are typically made from the same uPVC material as the window or door frames, ensuring a seamless and cohesive look.

✓ Durability    ✓ Low Maintenance    ✓ Energy Efficiency


**BF 5035**  
Profile extension  
70\*100mm

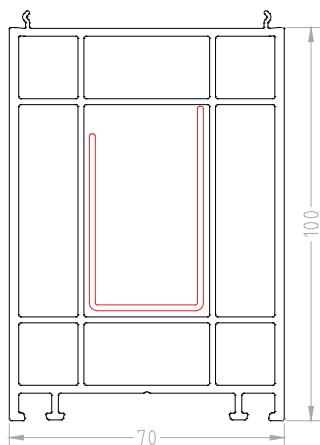


**BF 5031**  
Profile extension  
70\*25mm

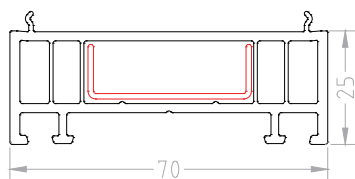


**BF 7210**  
Connecting pillar




**BF 3062**  
Edge Coupling




**BF 5025**  
Additional cornice  
part - Adaptor




**BF 7208**  
Blind box extension




**BF 7208**  
Angle connection  
pipe




**BF 7202**  
Connecting molding




**BF 7710**  
Pipe adaptor




**BF 3021**  
Interlock




**BF 3098**  
Interlock




**BF 3051**  
Aluminium sliding  
rail




**BF 5055**  
Cuarta caña



**BF 5045**  
ContraMarco

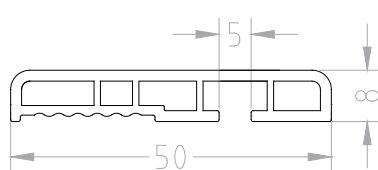


**BF 3052**  
Aluminium sliding  
rail



### Iron reinforcement

Can be used for:

**BF 3078** 3 Track Sliding Frame Profile

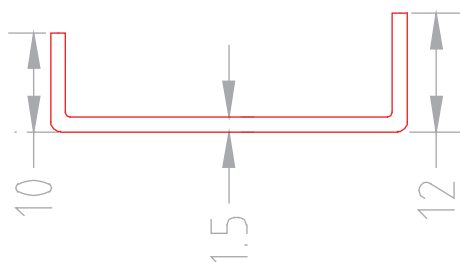

**BF 420-12**  
(Thickness 1.2mm)


**BF 420-15**  
(Thickness 1.5mm)

**BF 420-20**  
(Thickness 2.0mm)

### Iron reinforcement

Can be used for:

**BF 3078** 3 Track Sliding Frame Profile, **BF 3005** Slide frame profile, **BF 3001** Door frame, **BF 3031** Sliding frame profile with cornice

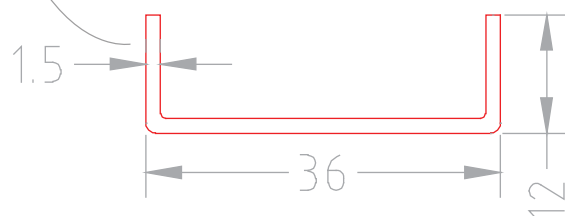

**BF 408-12**  
(Thickness 1.2mm)


**BF 408-15**  
(Thickness 1.5mm)

**BF 408-20**  
(Thickness 2.0mm)

### Iron reinforcement

Can be used for:

**BF 3011** Sliding sash

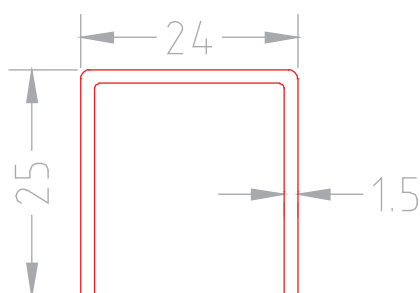

**BF 401-12**  
(Thickness 1.2mm)


**BF 401-15**  
(Thickness 1.5mm)

**BF 401-20**  
(Thickness 2.0mm)

### Iron reinforcement

Can be used for:

**BF 3088** Sliding sash

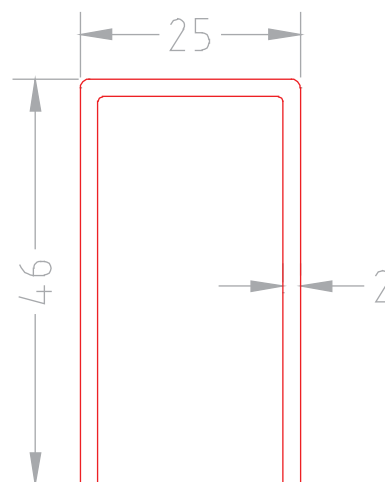

**BF 421-12**  
(Thickness 1.2mm)


**BF 421-15**  
(Thickness 1.5mm)

**BF 421-20**  
(Thickness 2.0mm)

### Iron reinforcement

Can be used for:

**BF 3004** Expansion profile

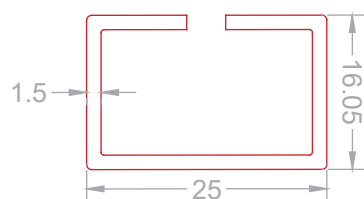

**BF 427-12**  
(Thickness 1.2mm)


**BF 427-15**  
(Thickness 1.5mm)

**BF 427-20**  
(Thickness 2.0mm)

### Iron reinforcement

Can be used for:

**BF 3004** Expansion profile



**BF 428-12**  
(Thickness 1.2mm)

**BF 428-15**  
(Thickness 1.5mm)

**BF 428-20**  
(Thickness 2.0mm)



**619223**  
Recessed  
Hidden  
Handle



**605543**  
Recessed  
Handle



**312766**  
Pop-up  
sliding  
handle




**613193**  
Sliding  
handle




**613217**  
Sliding  
handle




**613199**  
Sliding handle  
*Without cylinder  
with long plate*




**464367**  
Driving wheel



**476023**  
Driving wheel



**224947**  
Driving wheel




**603430**  
Driving wheel (200kg)




**615951**  
Driving wheel (120kg)


Application of door frame and sliding sash

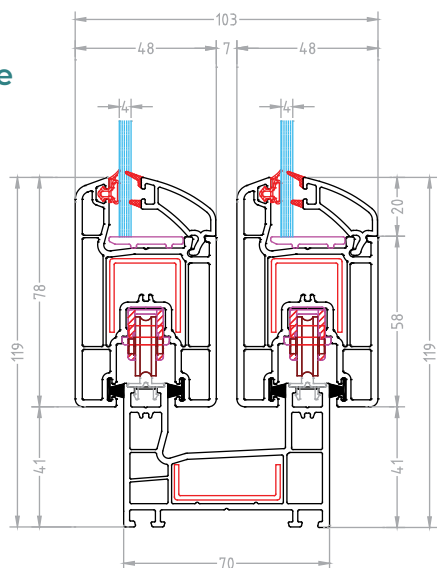


Application of door frame with cornice and sliding sash

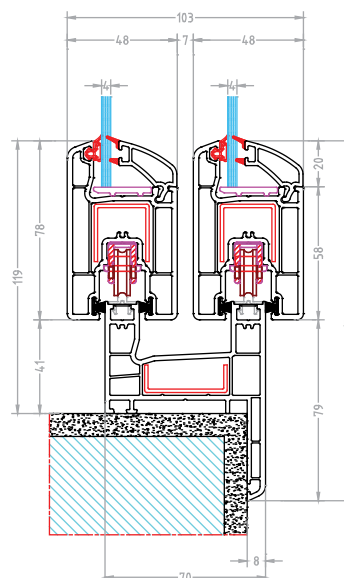


Application of frame profile with mosquito net and sliding sash profile

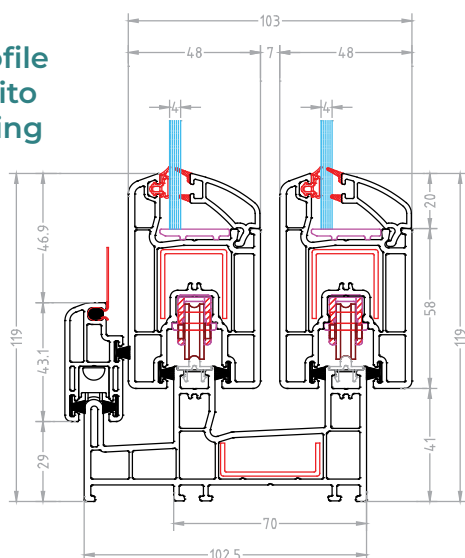


Application of 3 track frame profile with additional adaptor and sliding sash profile

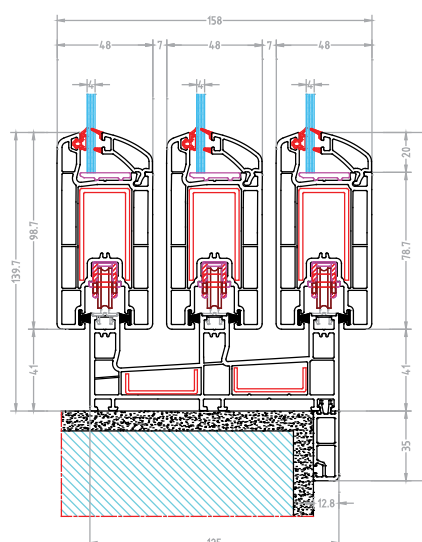


Application of sliding sash profile

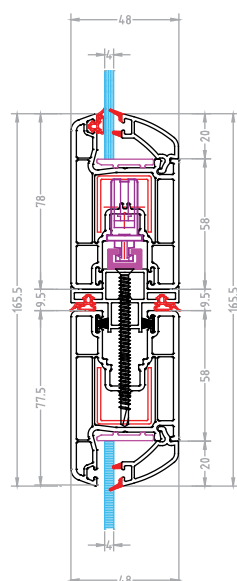


Application of door frame profile

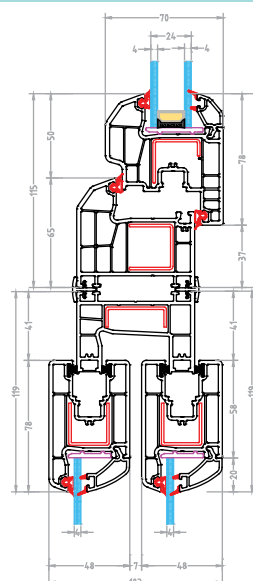


Application  
of Atmoslide system  
(with mosquito net)  
and 7000 series

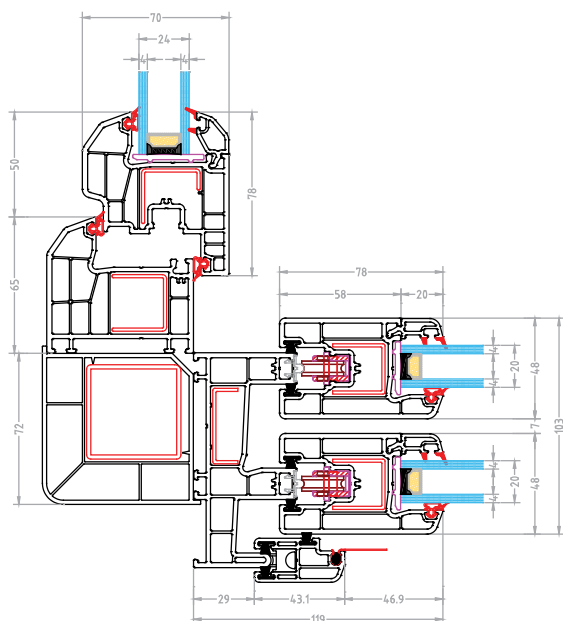


Application  
of Atmoslide system  
and 7000 series

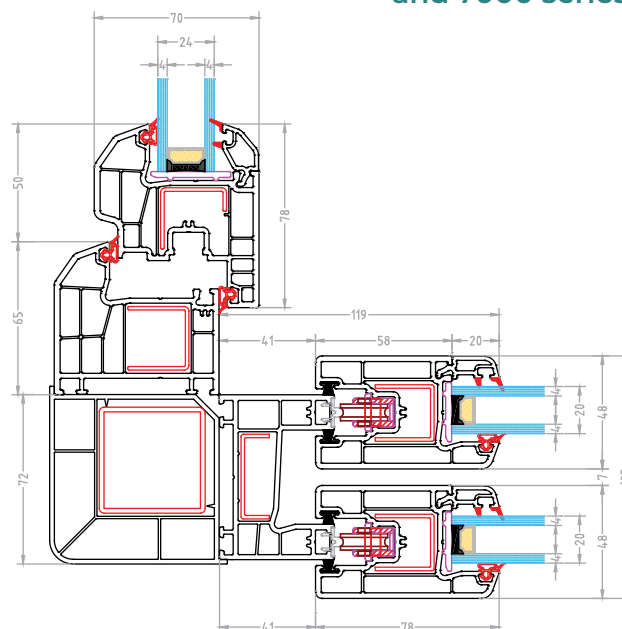


Application  
of Atmoslide and  
inside PVC window sill  
and outside ALU window  
sill

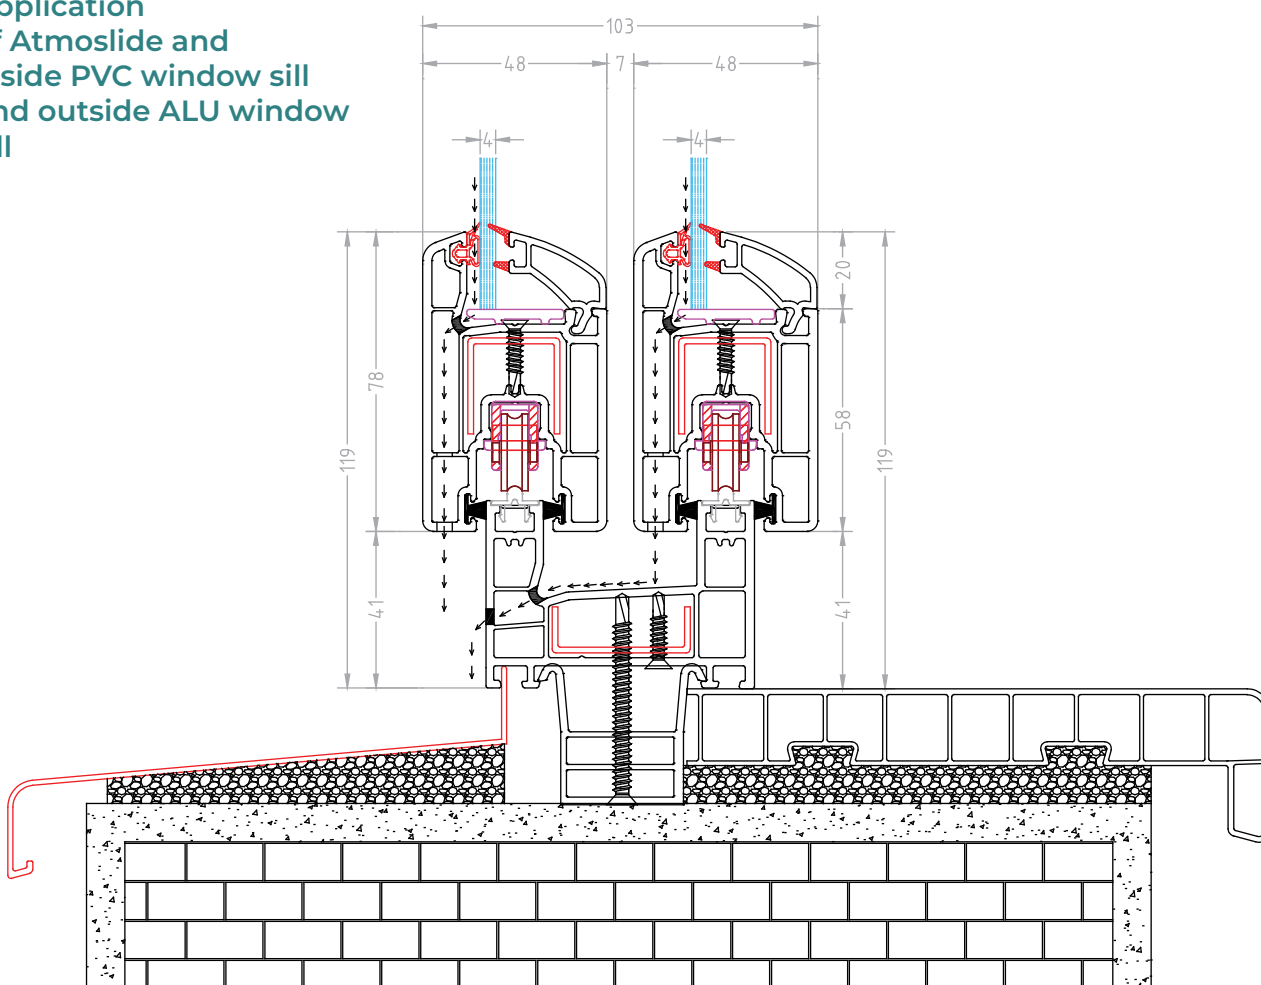


## Application of door frame profile and sliding sash profile

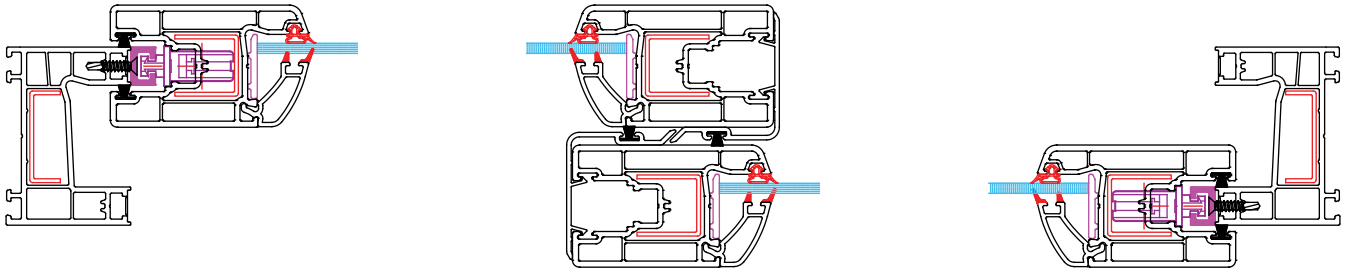


## Application of door frame profile with cornice and sliding sash profile

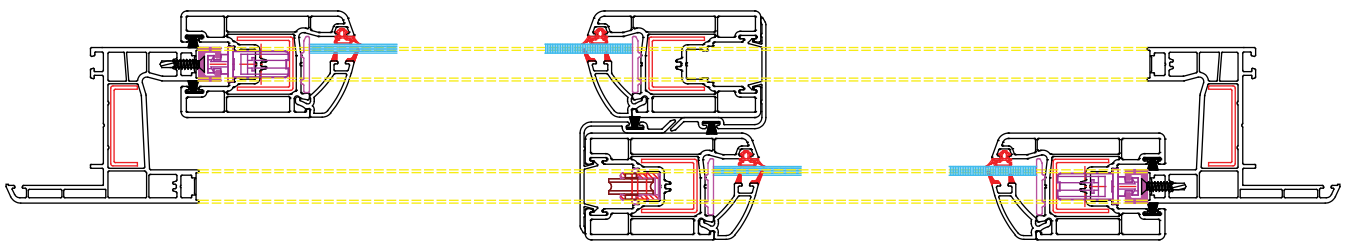


## Application of frame profile with mosquito net and sliding sash profile

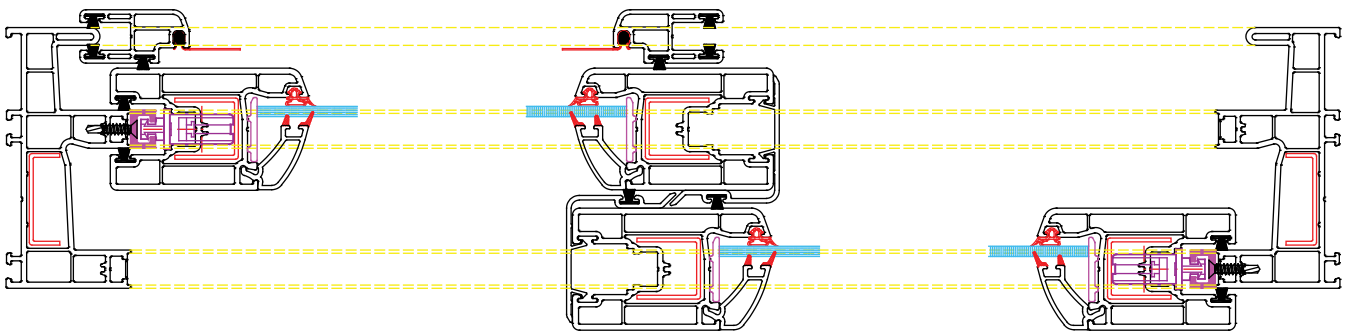


## Application of 3 track frame profile and sliding sash profile

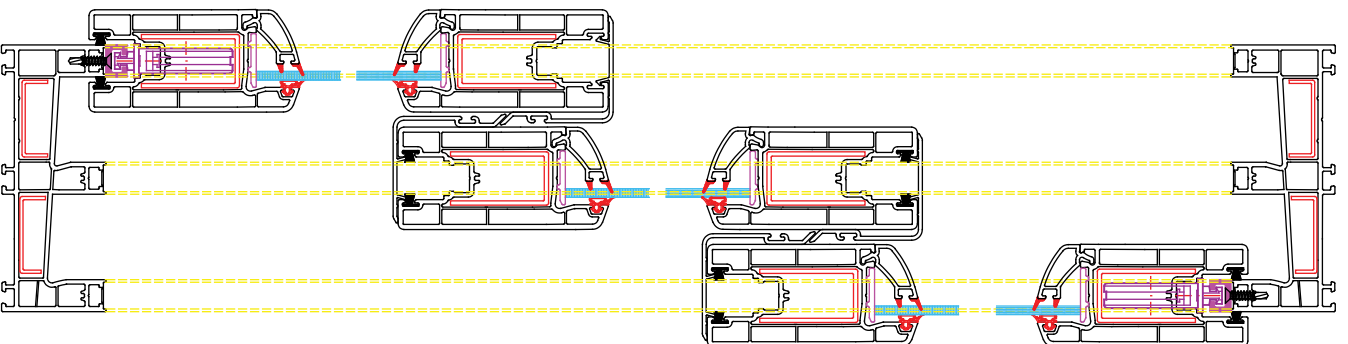

### Atmoslide with 4 sliding sash




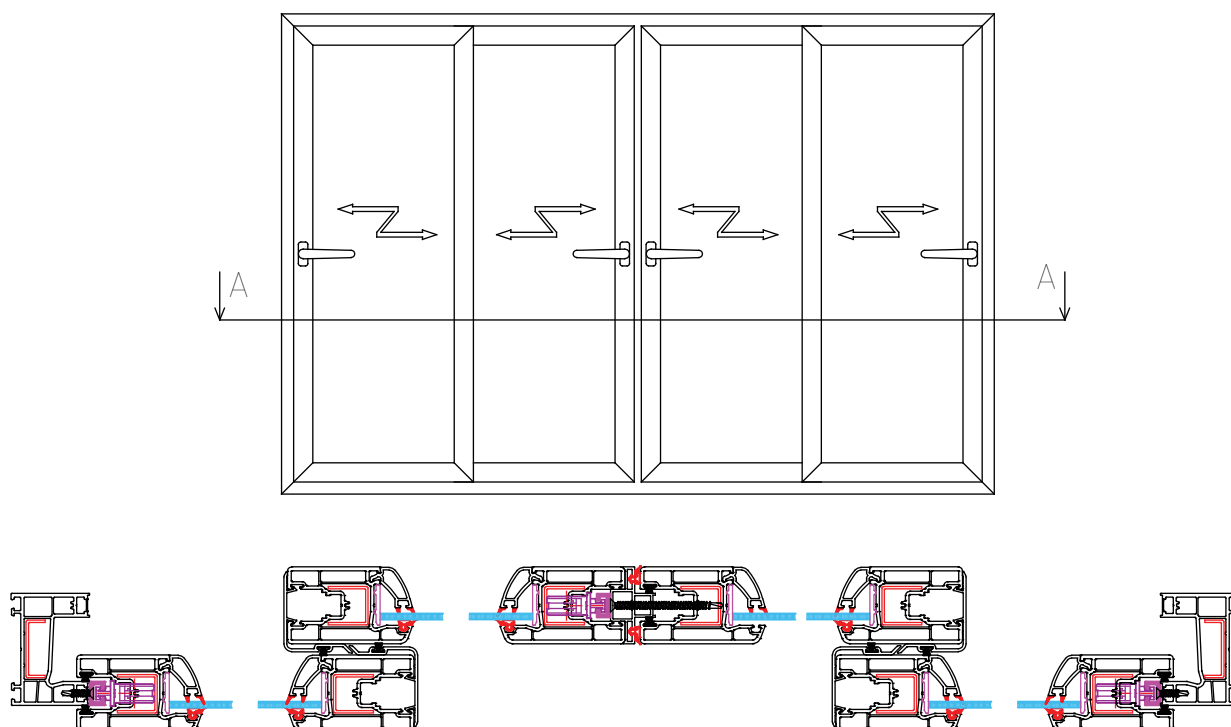


### Atmoslide with 2 sliding sash and 2 fixed sash

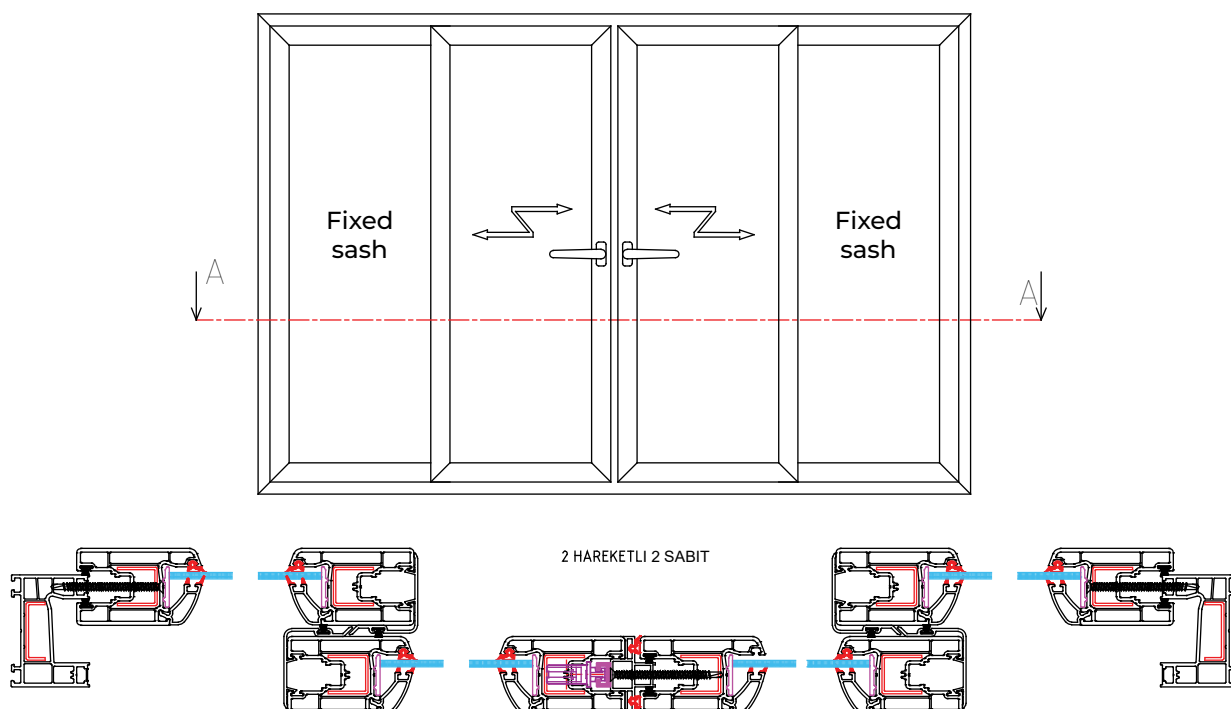

# Gaskets

High-Performance Gaskets for uPVC Windows and Doors
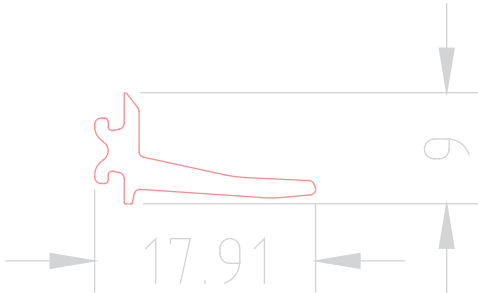
|                                                                                                         |                                                                                                            |
|---------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------|
| <b>Side gasket</b><br> | <b>Middle gasket</b><br> |
|                        |                          |



### Gaskets

Our uPVC profiles are equipped with premium-quality gaskets designed to deliver exceptional sealing performance, durability, and energy efficiency. These gaskets are an integral part of our window and door systems, ensuring optimal insulation and long-lasting protection against the elements.

**Superior Sealing**  
Our gaskets provide a tight, reliable seal that prevents air, water, and dust infiltration, enhancing the thermal and acoustic insulation of your windows and doors.

**Durable Material**  
Made from high-grade EPDM or TPE rubber, our gaskets are resistant to UV radiation, ozone, and extreme weather conditions, ensuring long-term performance without cracking or shrinking.

**Flexible Design**  
Engineered for a perfect fit within our uPVC profiles, the gaskets maintain their elasticity and shape over time, even with frequent opening and closing.

**Energy Efficiency**  
By minimizing heat loss and drafts, our gasket systems contribute to improved energy efficiency and reduced heating and cooling costs.

## Why to choose our products?

Our PVC window and door systems are manufactured using advanced technology and provide an excellent level of acoustic and thermal insulation, achieving the highest quality standards available.



Environment Friendly



Easy Installation



Cost Effective



Noise Reduction



Can be recycled



Less Maintenance



Fire Retardant



Long life



Thermal Insulation



Modern design



**Premium uPVC profiles**  
Created from high-quality raw materials



**Innovation**  
Enhanced durability and energy efficiency for construction needs





**Reliability**  
Our uPVC profiles are designed for unmatched reliability

# Gaskets



High-Performance Gaskets for uPVC Windows and Doors

## Application of side gasket


When used, the gasket is pressed

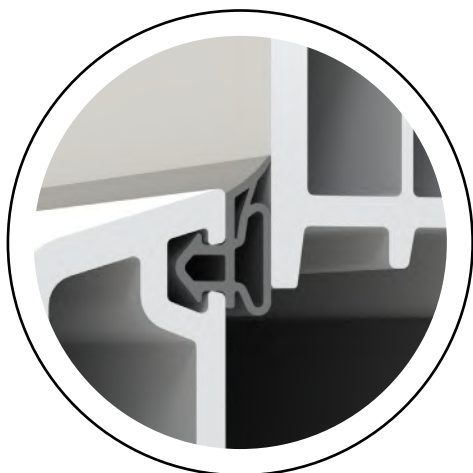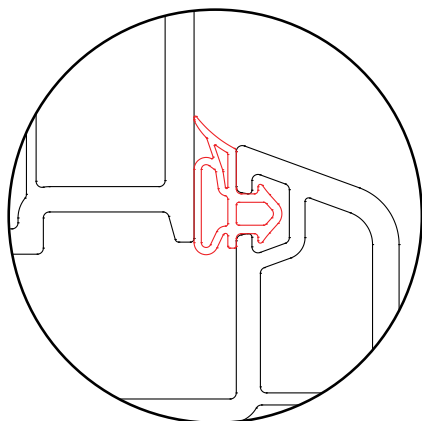

## Application of middle gasket

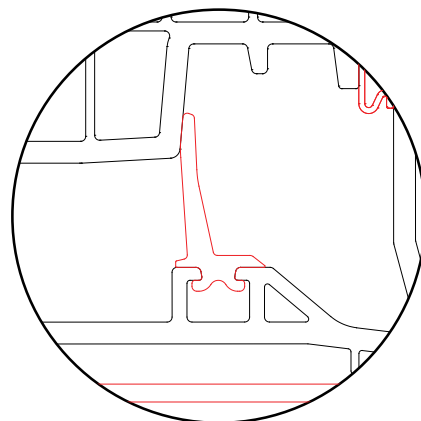

**Position: Open**  
Not pressed




**Position: Closed**  
Pressed



---

## UV Resistant

Modern uPVC profiles are treated with UV stabilizers that prevent discoloration and degradation from prolonged sun exposure.

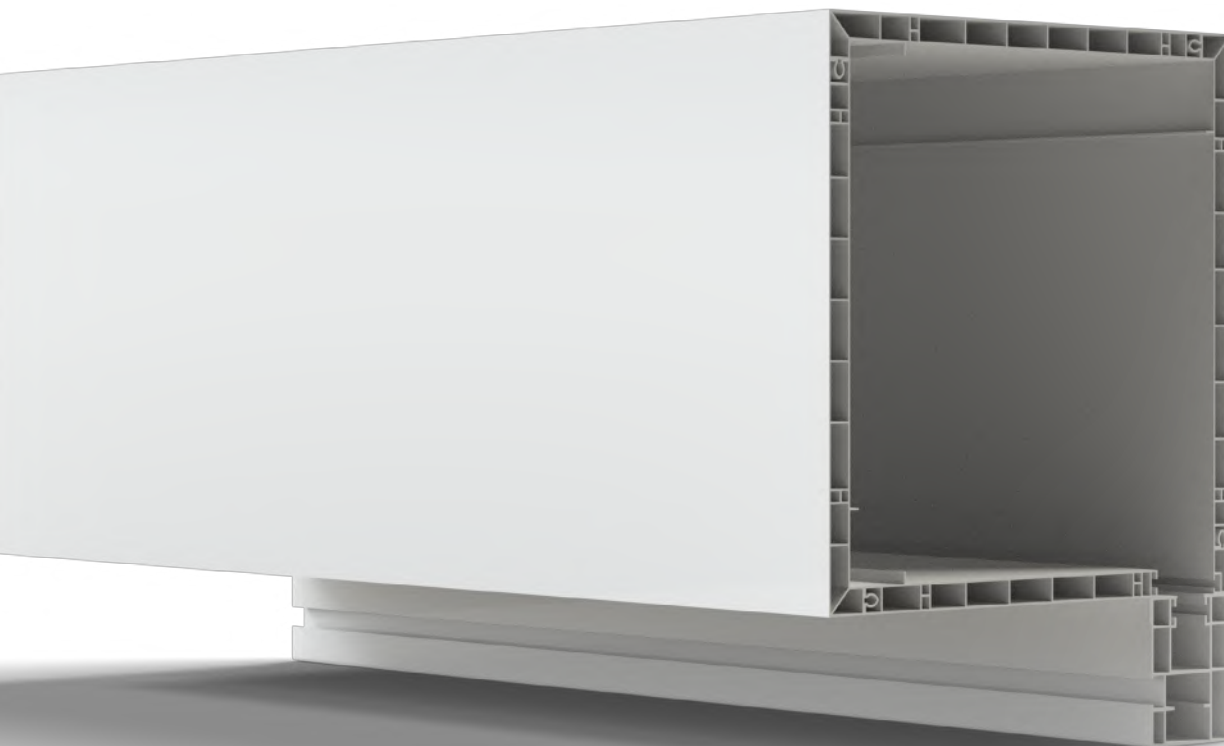

## Engineered for Excellence. Designed for Durability.

We specialize in the production of high-quality uPVC boxes for roller shutters—combining innovation, functionality, and aesthetic appeal. Our shutter box systems are designed to meet the highest standards of thermal insulation, noise reduction, and long-term durability, making them the ideal solution for both residential and commercial applications.



### Premium uPVC Material

Resistant to weather, UV radiation, and corrosion, our uPVC boxes ensure long-lasting performance with minimal maintenance.



### Thermal & Acoustic Insulation

Engineered to enhance energy efficiency and indoor comfort by reducing heat loss and external noise.



### Customizable Design

Available in a variety of sizes, colors, and finishes to seamlessly integrate with any architectural style.



### Easy Installation & Maintenance

Lightweight yet robust construction allows for quick installation and hassle-free upkeep.



### Compatible with Manual & Motorized Systems

Our boxes are designed to support both traditional and modern automation technologies.

## Why to choose our products?

Our roller shutter boxes are manufactured using advanced technology and provide an excellent level of acoustic and thermal insulation, achieving the highest quality standards available.



Environment  
Friendly



Easy  
Installation



Cost  
Effective



Noise  
Reduction



Can be  
recycled



Less  
Maintenance



Fire  
Retardant



Long  
life



Thermal  
Insulation



Modern  
design



### Quality products

Created from high-quality raw materials



### Innovation


Enhanced durability and energy efficiency for construction needs




### Reliability

Our products are designed for unmatched reliability


**BF 1950**  
Side cover

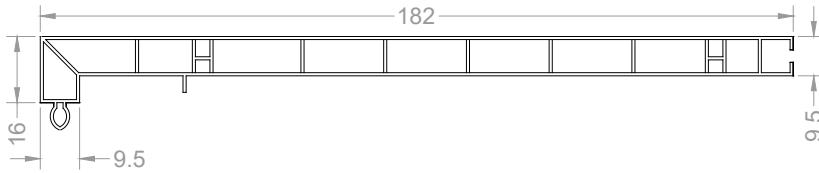


**BF 1952**  
Bottom connector




**BF 1951**  
Bottom cover

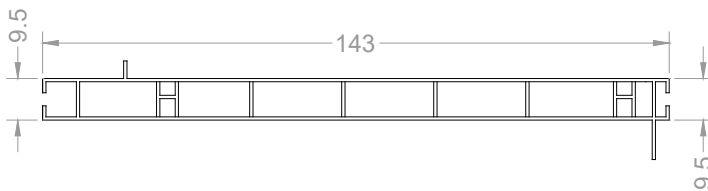

**BF 1953**  
PVC rail guide

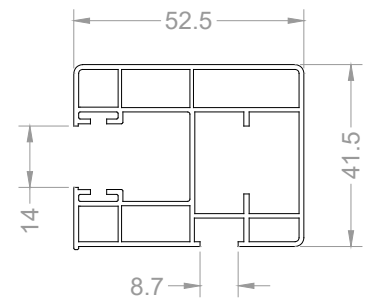

**BF 1954**  
Roller shutter box cover

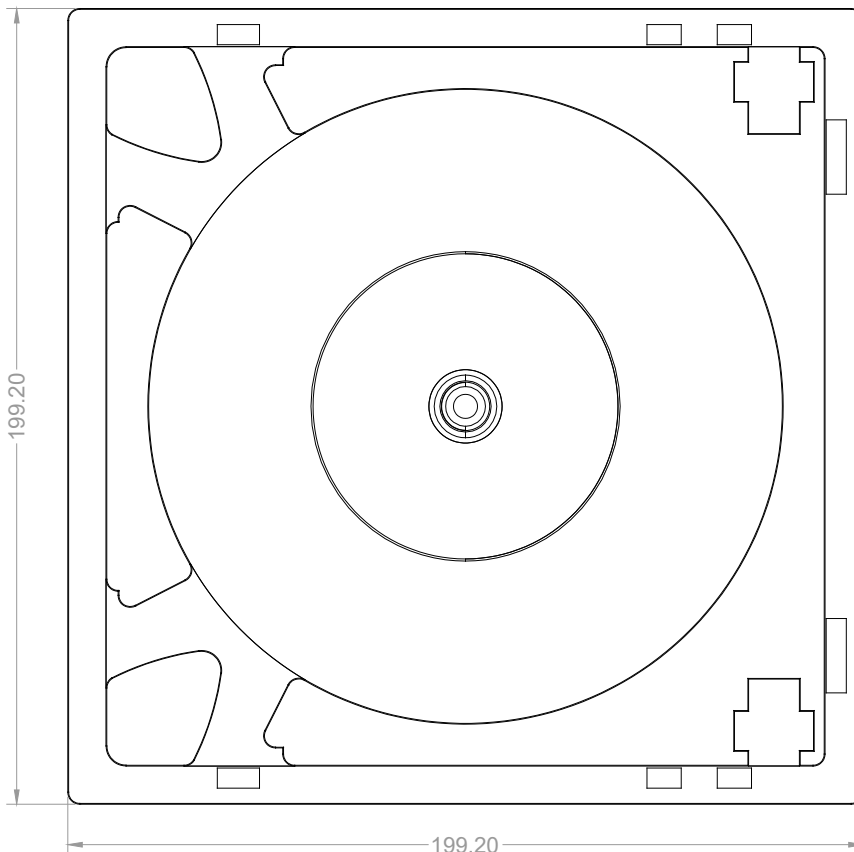

---

## Durable and Moisture-Resistant

PVC window sills are highly resistant to moisture, scratches, and everyday wear, making them a long-lasting and low-maintenance choice for both residential and commercial interiors.




# PVC window sills

Our PVC window sills combine modern design with exceptional performance, making them the perfect finishing touch for any window installation. Crafted from high-quality, moisture-resistant PVC, these sills are built to withstand daily wear and tear while maintaining their sleek appearance for years.

Whether you're renovating a home or outfitting a new building, our window sills offer:

- Waterproof and scratch-resistant surfaces
- UV stability to prevent fading and discoloration
- Easy cleaning with just a damp cloth—no special products needed
- Lightweight yet strong construction for easy installation
- A variety of colors and finishes, including wood-effect textures, to match any interior style

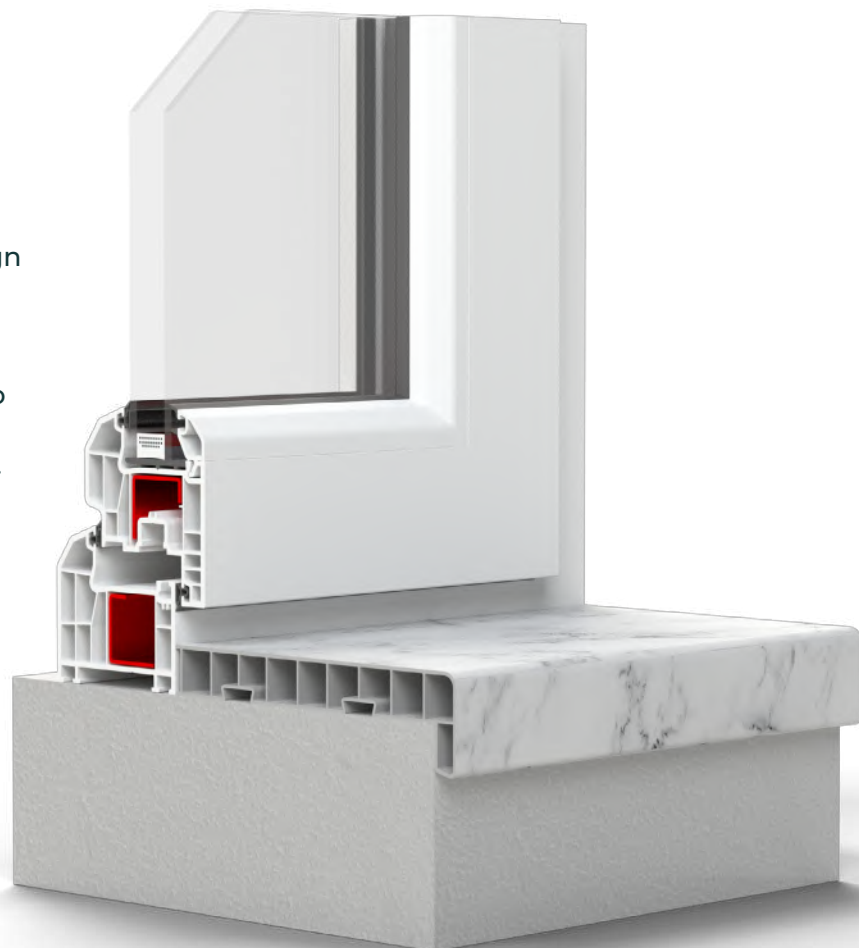

## Available widths of PVC window sills:

<sup>1</sup> 15 cm

<sup>2</sup> 20 cm

<sup>3</sup> 25 cm

<sup>4</sup> 30 cm

## Available colors of PVC window sills:

<sup>1</sup> Golden Oak

<sup>2</sup> Marble


<sup>3</sup> Anthracite

<sup>4</sup> White

## Window sills

Designed for both residential and commercial use

## Drawings

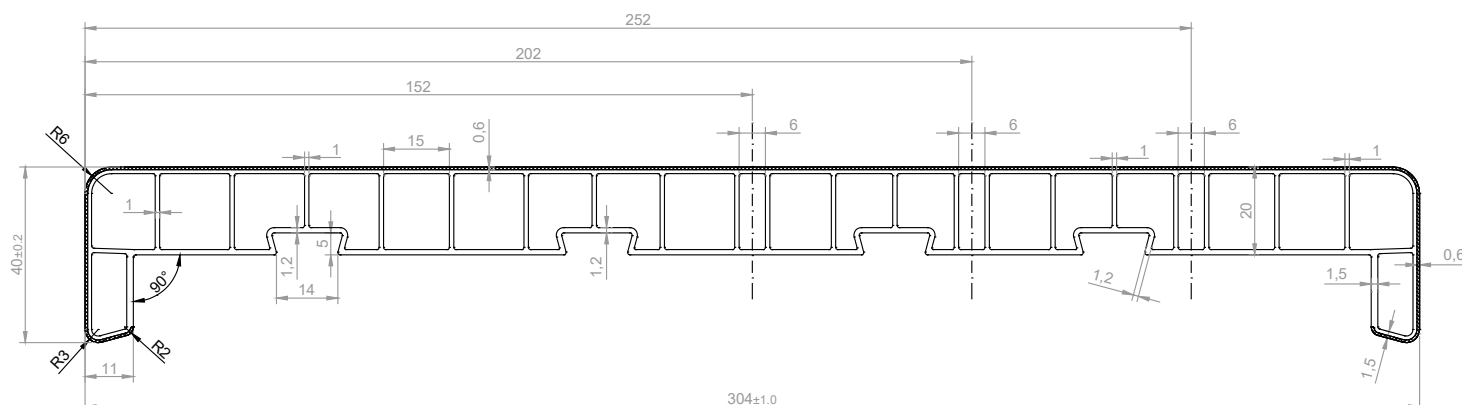

The drawing above shows the unique design of our PVC window sills. Depending on the requirements and demand, the sills are cut to the dimensions indicated above.

View of window sills with side covers.



White



## Golden Oak



Marble



Anthracite



E-mail  
**info@baufens.ba**



Web  
**www.baufens.ba**



**Premium uPVC profiles**



E-mail  
[info@baufens.ba](mailto:info@baufens.ba)



Web  
[www.baufens.ba](http://www.baufens.ba)



**Baufens®**  
Fenster & Türen



Scan for more info!  
[www.baufens.ba](http://www.baufens.ba)